



HIGH-SPEED MWIR SCIENCE-GRADE CAMERA FLIR X6900sc™

The FLIR X6900sc is an extraordinarily fast, highly sensitive MWIR camera designed for scientists, researchers, and engineers. With advanced triggering, on-camera RAM/SSD recording, and a four-position motorized filter wheel, this camera offers the functionality to stop motion on high speed events, whether they're in the lab or on the test range.

www.flir.com/science

HIGH SPEED, HIGH SENSITIVITY

Record crisp thermal images, even at high speeds

- Capture full 640 x 512 pixel resolution data at 1004 Hz
- Achieve frame rates up to 29,134 Hz in subwindow mode
- Detect temperature differences down to <20 mK with very low noise

ON-CAMERA RAM/SSD RECORDING




Stop motion on high-speed events, both in the lab and at the test range

- Save up 26,000 frames of full-resolution data to on-camera RAM with zero dropped frames
- Play back from RAM or save to removable solid-state drive in 90-seconds, so you can quickly rearm for a new recording
- Stream high-speed 14-bit data simultaneously over Gigabit Ethernet, CameraLink, and CoaXpress

SYNCHRONIZATION, TRIGGERING, AND SOFTWARE

Capture every moment by synchronizing with external events or instrumentation

- Triggers with external BNC input, a software trigger, or an IRIG-B time stamp for maximum versatility
- Integrates seamlessly with FLIR ResearchIR Max or third-party software such as MathWorks® MATLAB
- Stream data directly to a PC running software for live viewing, recording, analysis, and sharing
- Integrate with your proprietary software through optional Software Developers Kit (SDK)

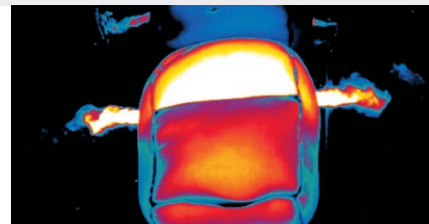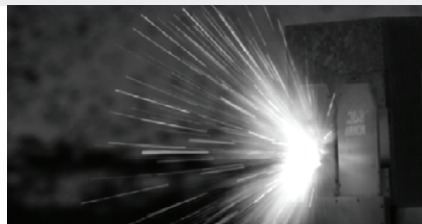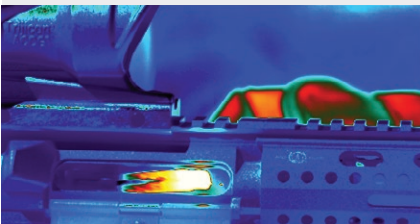

SPECIFICATIONS

FLIR X6900sc MWIR	
Detector Type	FLIR indium antimonide (InSb)
Spectral Range	3.0–5.0 μm or 1.5–5.0 μm
Resolution	640 x 512
Detector Pitch	25 μm
Thermal Sensitivity/NETD	<20 mK
Well Capacity	11.0 M electrons
Operability	>99.8% (>99.95% typical)
Sensor Cooling	Closed cycle rotary

Electronics	
Readout Type	Snapshot
Readout Modes	Asynchronous integrate while read Asynchronous integrate then read
Synchronization Modes	Genlock, Sync-in, Sync-out
Image Time Stamp	Internal IRIG-B decoder clock TSPI accurate time stamp
Minimum Integration Time	270 ns
Pixel Clock	355 MHz
Frame Rate (Full Window)	Programmable; 0.0015 Hz to 1004 Hz
Subwindow Mode	Flexible windowing down to 32 x 4 (steps of 32 columns, 4 rows)
Dynamic Range	14-bit
On-Camera Image Storage	RAM (volatile): 16 GB, up to 26,000 frames, full frame, SSD (non-volatile): 512 GB (supports >4 TB)
Radiometric Data Streaming	Simultaneous Gigabit Ethernet (GigE Vision), Camera Link, CoaXPRESS (CXP)
Standard Video	HDMI, SDI, NTSC, PAL
Command and Control	GigE, USB, RS-232, Camera Link, CXP (GenCam protocol supported over GigE or CXP)

Temperature Measurement	
Standard Temperature Range	-20°C to 350°C (-4°F to 662°F)
Optional Temperature Range	Up to 3,000°C (5,432°F)
Accuracy	$\pm 1^\circ\text{C}$ or $\pm 1\%$ of reading (0°C to 3,000°C on standard lens configurations only)


Optics	
Camera f/Number	f/2.5 or f/4.1
Available Lenses (Uses FLIR HDC Optics)	3.0-5.0 μm : 17 mm, 25 mm, 50 mm, 100 mm, 200 mm Broadband (1-5 μm): 25 mm, 50 mm, 100 mm
Lens Interface	FLIR HDC (4-tab bayonet)
Focus	Manual
Filtering	4-Position warm filter wheel, standard 1-inch filters

Image/Video Presentation	
Palettes	Selectable 8-bit
Automatic Gain Control	Manual, Linear, Plateau equalization, ROI, DDE
Overlay	Customizable (IRIG-B, Date, Integration time, Internal temp, Frame rate, Sync mode, Cooler hours)
Video Modes	HD: 720p/50/59.9 Hz, 1080p/25/29.9 Hz
Digital Zoom	1x, 4x, 4:3

General	
Operating Temperature Range	-20°C to 50°C (-4°F to 122°F)
Shock/Vibration	40 g, 11 msec ½ sine pulse/4.3 g RMS random vibration, all 3 axes
Power	24 VDC (< 50 W steady state)
Weight w/Handle, w/o Lens	6.35 kg (14 lbs)
Size (L x W x H) w/o Lens, Handle	249 x 157 x 147 mm (9.8 x 6.2 x 5.8 in.)
Mounting	2 x ¼ in. -20
	1 x 3/8 in. -16
	4 x #10 -24
	Side: 3 x ¼ in. -20 (each side)

ADVANCED FILTERING OPTIONS

The FLIR X6900sc incorporates an easy access, four-position motorized filter wheel allows the user to easily change filters as needed. With automatic filter recognition, the camera knows the filter location, spectral band, and associated calibrations, making it easy to select a filter and load a custom calibration and configuration to the camera. FLIR also supports custom cold filters for more tailored spectral filtering requirements.

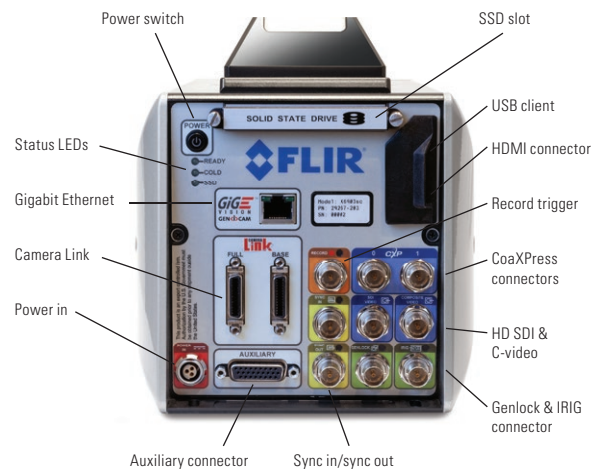

CORPORATE HEADQUARTERS
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
PH: +1 877.773.3547

SANTA BARBARA
FLIR Systems, Inc.
6769 Hollister Ave.
Goleta, CA 93117
PH: +1 805.690.6600

CANADA
FLIR Systems, Ltd.
920 Sheldon Court
Burlington, ON L7L 5K6
Canada
PH: +1 800.613.0507

LATIN AMERICA
FLIR Systems Brasil
Av. Antonio Bardella,
320 Sorocaba, SP 18085-852
Brasil
PH: +55 15 3238 7080

CHINA
FLIR Systems Co., Ltd
Rm 1613-16, Tower II
Grand Central Plaza
138 Shatin Rural Committee Rd.
Shatin, New Territories
Hong Kong
PH: +852 2792 8955

EUROPE
FLIR Systems, Inc.
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 (0) 3665 5100

www.flir.com
NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2018 FLIR Systems, Inc. All rights reserved. 04/23/18

17-1683-INS-X6900sc Datasheet



The World's Sixth Sense®