



N9030A PXA X-Series Signal Analyzer

Data Sheet

LXI class C certified

Available frequency ranges

N9030A-503	3 Hz to 3.6 GHz
N9030A-508	3 Hz to 8.4 GHz
N9030A-513	3 Hz to 13.6 GHz
N9030A-526	3 Hz to 26.5 GHz
N9030A-543	3 Hz to 43 GHz
N9030A-544	3 Hz to 44 GHz
N9030A-550	3 Hz to 50 GHz



Agilent Technologies

Table of Contents

Definitions and Conditions 3

Frequency and Time Specifications 4

Amplitude Accuracy and Range Specifications 6

Dynamic Range Specifications 9

PowerSuite Measurement Specifications 16

General Specifications 17

Inputs and Outputs 19

Other Optional Outputs 21

I/Q Analyzer 22

I/Q Analyzer - Option B25 23

I/Q Analyzer - Option B40 24

I/Q Analyzer - Option B1X 25

Related Literature 27

Agilent’s future-ready PXA signal analyzer is the evolutionary replacement for your current high-performance analyzer. It helps you sustain past achievements, enhance current designs and accelerate future innovations.

Its performance, flexibility, capability and compatibility enable you to address demanding applications in aerospace, defense, commercial communications and more.

- Reveal new levels of signal detail with outstanding RF performance
- Increase test throughput and protect your system investments
- Refresh legacy systems with a highly compatible replacement

Definitions and Conditions

Specifications describe the performance of parameters covered by the product warranty and apply to temperature ranges 0 to 55 °C, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx. 2σ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but is not covered by the product warranty.

The analyzer will meet its specifications when:

- The analyzer is within its calibration cycle.
- Under auto couple control, except that Auto Sweep Time Rules = Accy.
- For signal frequencies < 10 MHz, DC coupling applied.
- The analyzer has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on, if it had previously been stored at a temperature range inside the allowed storage range but outside the allowed operating range.
- The analyzer has been turned on at least 30 minutes with Auto Align set to normal, or if Auto Align is set to off or partial, alignments must have been run recently enough to prevent an Alert message. If the Alert condition is changed from Time and Temperature to one of the disabled duration choices, the analyzer may fail to meet specifications without informing the user.

This PXA signal analyzer data sheet is a summary of the complete specifications and conditions. The complete PXA Signal Analyzer Specification Guide can be obtained from the web at:

www.agilent.com/find/pxa_specifications

Frequency and Time Specifications

Frequency range	DC coupled	AC coupled
Option 503	3 Hz to 3.6 GHz	10 MHz to 3.6 GHz
Option 508	3 Hz to 8.4 GHz	10 MHz to 8.4 GHz
Option 513	3 Hz to 13.6 GHz	10 MHz to 13.6 GHz
Option 526	3 Hz to 26.5 GHz	10 MHz to 26.5 GHz
Option 543	3 Hz to 43 GHz	NA
Option 544	3 Hz to 44 GHz	NA
Option 550	3 Hz to 50 GHz	NA

Band	LO multiple (N)	
0	1	3 Hz to 3.6 GHz
1	1	3.5 to 8.4 GHz
2	2	8.3 to 13.6 GHz
3	2	13.5 to 17.1 GHz
4	4	17 to 26.5 GHz
5	4	26.4 to 34.5 GHz
6	8	34.4 to 50 GHz

Precision frequency reference

Accuracy	$\pm [(time\ since\ last\ adjustment\ \times\ aging\ rate) + temperature\ stability + calibration\ accuracy]$
Aging rate	$\pm 1 \times 10^{-7} / year$ $\pm 1.5 \times 10^{-7} / 2\ years$
Temperature stability 20 to 30 °C Full temperature range	$\pm 1.5 \times 10^{-8}$ $\pm 5 \times 10^{-8}$
Achievable initial calibration accuracy	$\pm 4 \times 10^{-8}$
Example frequency reference accuracy 1 year after last adjustment 20 to 30 °C	$= \pm (1 \times 1 \times 10^{-7} + 1.5 \times 10^{-8} + 4 \times 10^{-8})$ $= \pm 1.55 \times 10^{-7}$
Residual FM Center frequency = 1 GHz 10 Hz RBW, 10 Hz VBW	$\leq (0.25\ Hz \times N)$ p-p in 20 ms nominal See band table above for N (LO multiple)

Frequency readout accuracy (start, stop, center, marker)

$\pm (\text{marker frequency} \times \text{frequency reference accuracy} + 0.10\% \times \text{span} + 5\% \times \text{RBW} + 2\ Hz + 0.5 \times \text{horizontal resolution}^1)$

Marker frequency counter

Accuracy	$\pm (\text{marker frequency} \times \text{frequency reference accuracy} + 0.100\ Hz)$
Delta counter accuracy	$\pm (\text{delta frequency} \times \text{frequency reference accuracy} + 0.141\ Hz)$
Counter resolution	0.001 Hz

Frequency span (FFT and swept mode)

Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument
Resolution	2 Hz
Accuracy Swept FFT	$\pm (0.1\% \times \text{span} + \text{horizontal resolution})$ $\pm (0.1\% \times \text{span} + \text{horizontal resolution})$

1. Horizontal resolution is span/(sweep points -1).

Sweep time and triggering		
Range	Span = 0 Hz Span ≥ 10 Hz	1 μs to 6000 s 1 ms to 4000 s
Accuracy	Span ≥ 10 Hz, swept Span ≥ 10 Hz, FFT Span = 0 Hz	± 0.01% nominal ± 40% nominal ± 0.01% nominal
Sweep trigger	Free run, line, video, external 1, external 2, RF burst, periodic timer	
Trigger Delay	Span = 0 Hz or FFT Span ≥ 10 Hz, swept Resolution	–150 to +500 ms 0 to 500 ms 0.1 μs
Time gating		
Gate methods	Gated LO; gated video; gated FFT	
Gate length range (except method = FFT)	1 μs to 5.0 s	
Gate delay range	0 to 100.0 s	
Gate delay jitter	33.3 ns p-p nominal	
Sweep (trace) point range		
All spans	1 to 40001	
Resolution bandwidth (RBW)		
Range (–3.01 dB bandwidth)	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz	
Bandwidth accuracy (power)	1 Hz to 100 kHz	± 0.5% (± 0.022 dB)
RBW range	110 kHz to 1.0 MHz (< 3.6 GHz CF)	± 1.0% (± 0.044 dB)
	1.1 to 2 MHz (< 3.6 GHz CF)	± 0.07 dB nominal
	2.2 to 3 MHz (< 3.6 GHz CF)	± 0.10 dB nominal
	4 to 8 MHz (< 3.6 GHz CF)	± 0.20 dB nominal
Bandwidth accuracy (–3.01 dB)		
RBW range	1 Hz to 1.3 MHz	± 2% nominal
Selectivity (–60 dB/–3 dB)	4.1:1 nominal	
EMI bandwidth (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz	(Option EMC required)
EMI bandwidth (MIL STD 461E compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz	(Option EMC required)
Analysis bandwidth ¹		
Maximum bandwidth	Standard Option B25 Option B40 Option B1X	10 MHz 25 MHz 40 MHz 140 MHz
Video bandwidth (VBW)		
Range	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)	
Accuracy	± 6% nominal (in swept mode and zero span)	
Measurement speed ²		
Local measurement and display update rate	Standard 10 ms (100/s) nominal	
Remote measurement and LAN transfer rate	10 ms (100/s) nominal	
Marker peak search	2.5 ms nominal	
Center frequency tune and transfer (RF)	43 ms nominal	
Center frequency tune and transfer (μW)	69 ms nominal	
Measurement/mode switching	40 ms nominal	

1. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain.

2. Sweep points = 101.

Amplitude Accuracy and Range Specifications

Amplitude range			
Measurement range	Displayed average noise level (DANL) to maximum safe input level		
Input attenuator range (3 Hz to 50 GHz)	0 to 70 dB in 2 dB steps		
Electronic attenuator (Option EA3)			
Frequency range	3 Hz to 3.6 GHz		
Attenuation range			
Electronic attenuator range	0 to 24 dB, 1 dB steps		
Full attenuation range (mechanical + electronic)	0 to 94 dB, 1 dB steps		
Maximum safe input level			
Average total power (with and without preamp)	+30 dBm (1 W)		
Peak pulse power	< 10 μ s pulse width, < 1% duty cycle +50 dBm (100 W) and input attenuation \geq 30 dB		
DC volts			
DC coupled	\pm 0.2 Vdc		
AC coupled	\pm 100 Vdc (For frequency Option 503, 508, 513, or 526)		
Display range			
Log scale	0.1 to 1 dB/division in 0.1 dB steps 1 to 20 dB/division in 1 dB steps (10 display divisions)		
Linear scale	10 divisions		
Scale units	dBm, dBmV, dB μ V, dBmA, dB μ A, V, W, A		
Frequency response	Specification	95th percentile (\approx 2 σ)	
(10 dB input attenuation, 20 to 30 °C, preselector centering applied above 3.6 GHz)			
RF/MW (Option 503, 508, 513, 526)	3 Hz to 10 MHz	\pm 0.46 dB	
	10 MHz to 3.6 GHz	\pm 0.35 dB	\pm 0.16 dB
	3.5 to 8.4 GHz	\pm 1.5 dB	\pm 0.39 dB
	8.3 to 13.6 GHz	\pm 2.0 dB	\pm 0.45 dB
	13.5 to 22.0 GHz	\pm 2.0 dB	\pm 0.62 dB
	22.0 to 26.5 GHz	\pm 2.5 dB	\pm 0.82 dB
Millimeter-Wave (Option 543, 544, 550)	3 Hz to 20 MHz	\pm 0.46 dB	
	20 to 50 MHz	\pm 0.35 dB	\pm 0.19 dB
	50 MHz to 3.6 GHz	\pm 0.35 dB	\pm 0.15 dB
	3.5 to 5.2 GHz	\pm 1.7 dB	\pm 0.70 dB
	5.2 to 8.4 GHz	\pm 1.5 dB	\pm 0.57 dB
	8.3 to 13.6 GHz	\pm 2.0 dB	\pm 0.54 dB
	13.5 to 17.1 GHz	\pm 2.0 dB	\pm 0.64 dB
	17.0 to 22.0 GHz	\pm 2.0 dB	\pm 0.72 dB
	22.0 to 26.5 GHz	\pm 2.5 dB	\pm 0.71 dB
	26.4 to 34.5 GHz	\pm 2.5 dB	\pm 0.93 dB
34.4 to 50 GHz	\pm 3.2 dB	\pm 1.24 dB	
Preamp on (0 dB attenuation) (Option P03, P08, P13, P26, P43, P44, P50)			
RF/MW (Option 503, 508, 513, 526)	9 to 100 kHz		\pm 0.36 dB
	100 kHz to 50 GHz	\pm 0.68 dB	\pm 0.26 dB
	50 MHz to 3.6 GHz	\pm 0.55 dB	\pm 0.28 dB
	3.5 to 8.4 GHz	\pm 2.0 dB	\pm 0.64 dB
	8.3 to 13.6 GHz	\pm 2.3 dB	\pm 0.76 dB
	13.5 to 17.1 GHz	\pm 2.5 dB	\pm 0.95 dB
	17.0 to 22.0 GHz	\pm 3.0 dB	\pm 1.41 dB
22.0 to 26.5 GHz	\pm 3.5 dB	\pm 1.61 dB	

Millimeter-Wave (Option 543, 544, 550)	9 to 100 kHz		± 0.40 dB
	100 kHz to 50 MHz	± 0.68 dB	± 0.34 dB
	50 MHz to 3.6 GHz	± 0.60 dB	± 0.31 dB
	3.5 to 5.2 GHz	± 2.0 dB	± 0.81 dB
	5.2 to 8.4 GHz	± 2.0 dB	± 0.70 dB
	8.3 to 13.6 GHz	± 2.3 dB	± 0.79 dB
	13.5 to 17.1 GHz	± 2.5 dB	± 0.88 dB
	17.0 to 22.0 GHz	± 3.0 dB	± 1.07 dB
	22.0 to 26.5 GHz	± 3.5 dB	± 1.03 dB
	26.4 to 34.5 GHz	± 3.0 dB	± 1.35 dB
	34.4 to 50 GHz	± 4.1 dB	± 1.69 dB
Input attenuation switching uncertainty			
Relative to 10 dB and preamp off		Specifications	Additional information
At 50 MHz (reference frequency)	attenuation 12 to 40 dB	± 0.14 dB	± 0.03 dB typical
	attenuation 2 to 8 dB	± 0.18 dB	± 0.05 dB typical
	attenuation 0 dB		± 0.05 dB nominal
attenuation > 2 dB			
	3 Hz to 3.6 GHz		± 0.3 dB nominal
	3.5 to 8.4 GHz		± 0.5 dB nominal
	8.3 to 13.6 GHz		± 0.7 dB nominal
	13.5 to 26.5 GHz		± 0.7 dB nominal
	26.4 to 50 GHz		± 1.0 dB nominal
Total absolute amplitude accuracy			
(10 dB attenuation, 20 to 30 °C, 1 Hz ≤ RBW ≤ 1 MHz, input signal –10 to –50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, σ = nominal standard deviation)			
	At 50 MHz	± 0.24 dB	
	At all frequencies	± (0.24 dB + frequency response)	
	10 Hz to 3.6 GHz	± 0.19 dB (95th Percentile approx. 2σ)	
Preamp on (Option P03, P08, P13, P26, P43, P44 and P50)	At all frequencies	± (0.36 dB + frequency response)	
Input voltage standing wave ratio (VSWR)			
		Freq Opt 503, 508, 513, 526	Freq Opt 543, 544, 550
(10 dB input attenuation)	50 MHz	1.07:1 nominal	1.025:1 nominal
	10 MHz to 3.6 GHz	1.139 (95th percentile)	1.134 (95th percentile)
	3.5 to 8.4 GHz	1.290 (95th percentile)	1.152 (95th percentile)
	8.3 to 13.6 GHz	1.388 (95th percentile)	1.178 (95th percentile)
	13.5 to 17.1 GHz	1.403 (95th percentile)	1.204 (95th percentile)
	17.0 to 26.5 GHz	1.475 (95th percentile)	1.331 (95th percentile)
	26.4 to 34.5 GHz	NA	1.321 (95th percentile)
	34.4 to 50 GHz	NA	1.378 (95th percentile)
Preamp on (0 dB input attenuation) (Option P03, P08, P13, P26, P43, P44, and P50)	10 MHz to 3.6 GHz	1.45 (95th percentile)	1.393 nominal
	3.5 to 8.4 GHz	1.54 (95th percentile)	1.50 (95th percentile)
	8.3 to 13.6 GHz	1.57 (95th percentile)	1.310 (95th percentile)
	13.5 to 17.1 GHz	1.48 (95th percentile)	1.330 (95th percentile)
	17.0 to 26.5 GHz	1.54 (95th percentile)	1.339 (95th percentile)
	26.4 to 34.5 GHz	NA	1.41 (95th percentile)
	34.4 to 50 GHz	NA	1.42 (95th percentile)

Resolution bandwidth switching uncertainty (referenced to 30 kHz RBW)

1 Hz to 1.5 MHz RBW	± 0.03 dB
1.6 MHz to 2.7 MHz RBW	± 0.05 dB
3 MHz RBW	± 0.10 dB
4, 5, 6, 8 MHz RBW	± 0.30 dB

Reference level

Range	
Log scale	-170 to +30 dBm in 0.01 dB steps
Linear scale	707 pV to 7.07 V with 0.11% (0.01 dB) resolution
Accuracy	0 dB

Display scale switching uncertainty

Switching between linear and log	0 dB
Log scale/div switching	0 dB

Display scale fidelity

Between -10 dBm and -80 dBm input mixer level	± 0.10 dB total	± 0.04 dB typical
Below -18 dBm input mixer level	± 0.07 dB	± 0.02 dB typical

Trace detectors

Normal, peak, sample, negative peak, log power average, RMS average, and voltage average

Preampifier

Frequency range ¹	Option P03	9 kHz to 3.6 GHz
	Option P08	9 kHz to 8.4 GHz
	Option P13	9 kHz to 13.6 GHz
	Option P26	9 kHz to 26.5 GHz
	Option P43	9 kHz to 43 GHz
	Option P44	9 kHz to 44 GHz
	Option P50	9 kHz to 50 GHz
Gain	9 kHz to 3.6 GHz	+20 dB nominal
	3.6 to 26.5 GHz	+35 dB nominal
	26.5 to 50 GHz	+40 dB nominal

1. Below 100 kHz, only 95th percentile (approx. 2 σ) value for frequency response is provided.

Dynamic Range Specifications

1 dB gain compression (two-tone)		Maximum power at input mixer		
(At 1 kHz RBW with 100 kHz tone spacing, 20 to 30 °C)				
	20 to 40 MHz	-3 dBm	0 dBm typical	
	40 to 200 MHz	+1 dBm	+3 dBm typical	
	200 MHz to 3.6 GHz	+3 dBm	+5 dBm typical	
	3.6 to 16 GHz	+1 dBm	+4 dBm typical	
	16 to 26.5 GHz	-1 dBm	+2 dBm typical	
	26.5 to 50 GHz		0 dBm nominal	
Preamp on (Option P03, P08, P13, P26, P43, P44, and P50)	10 MHz to 3.6 GHz		-14 dBm nominal	
	3.6 to 26.5 GHz			
	Tone spacing 100 kHz to 20 MHz		-28 dBm nominal	
	Tone spacing > 70 MHz			
	Freq Option ≤ 526		-10 dBm nominal	
	Freq Option > 526		-20 dBm nominal	
	26.5 to 50 GHz		-30 dBm nominal	
Displayed average noise level (DANL)				
(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30 °C)				
RF/MW (Option 503, 508, 513, 526)		Normal ¹ /LNP enabled ²		Normal ¹ /LNP enabled ²
Preamp off	3 Hz to 9 kHz		-100 dBm/NA typical	
	9 to 100 kHz	-146 dBm/NA	-152 dBm/NA typical	
	100 kHz to 1 MHz	-150 dBm/NA	-156 dBm/NA typical	
	1 to 10 MHz	-155 dBm/NA	-158 dBm/NA typical	
	10 MHz to 1.2 GHz	-155 dBm/NA	-157 dBm/NA typical	
	1.2 to 2.1 GHz	-153 dBm/NA	-155 dBm/NA typical	
	2.1 to 3.0 GHz	-152 dBm/NA	-154 dBm/NA typical	
	3.0 to 3.6 GHz	-151 dBm/NA	-153 dBm/NA typical	
	3.5 to 4.2 GHz	-147 dBm/-153 dBm	-150 dBm/-156 dBm typical	
	4.2 to 8.4 GHz	-150 dBm/-155 dBm	-152 dBm/-157 dBm typical	
	8.3 to 13.6 GHz	-149 dBm/-155 dBm	-151 dBm/-157 dBm typical	
	13.5 to 16.9 GHz	-145 dBm/-152 dBm	-147 dBm/-155 dBm typical	
	16.9 to 20.0 GHz	-143 dBm/-151 dBm	-145 dBm/-153 dBm typical	
	20.0 to 26.5 GHz	-137 dBm/-150 dBm	-140 dBm/-152 dBm typical	
Preamp on Option P03, P08, P13, P26	100 to 200 kHz	-157 dBm/NA	-160 dBm/NA typical	
	200 to 500 kHz	-160 dBm/NA	-163 dBm/NA typical	
	0.5 to 1 MHz	-164 dBm/NA	-166 dBm/NA typical	
Option P03, P08, P13, P26	1 to 10 MHz	-164 dBm/NA	-167 dBm/NA typical	
Option P03, P08, P13, P26	10 MHz to 2.1 GHz	-165 dBm/NA	-166 dBm/NA typical	
Option P03, P08, P13, P26	2.1 to 3.6 GHz	-163 dBm/NA	-164 dBm/NA typical	
Option P08, P13, P26 ³	3.5 to 8.4 GHz	-164 dBm/NA	-166 dBm/NA typical	
Option P13, P26 ³	8.3 to 13.6 GHz	-163 dBm/NA	-165 dBm/NA typical	
Option P26 ³	13.5 to 16.9 GHz	-161 dBm/NA	-162 dBm/NA typical	
Option P26 ³	16.9 to 20.0 GHz	-159 dBm/NA	-161 dBm/NA typical	
Option P26 ³	20.0 to 26.5 GHz	-155 dBm/NA	-157 dBm/NA typical	
DANL with Noise Floor Extension (NFE) on		Improvement @ 95th percentile		
RF/MW (Option 503, 508, 513, 526)		Preamp Off	Preamp On	LNP enabled ^{2,3}
Band 0, f > 20 MHz		10 dB	9 dB	NA
Band 1		4 dB	8 dB	5 dB
Band 2		7 dB	8 dB	9 dB
Band 3		8 dB	8 dB	9 dB
Band 4		6 dB	5 dB	7 dB
Examples of effective DANL Frequency 20 to 30 °C		Preamp Off	Preamp On	LNP enabled ^{2,3}
Mid-Band 0 (1.8 GHz)		-162 dBm	-172 dBm	NA
Mid-Band 1 (5.95 GHz)		-158 dBm	-172 dBm	-160 dBm
Mid-Band 2 (10.95 GHz)		-157 dBm	-170 dBm	-161 dBm
Mid-Band 3 (15.3 GHz)		-152 dBm	-166 dBm	-158 dBm
Mid-Band 4 (21.75 GHz)		-145 dBm	-162 dBm	-155 dBm

1. With the NFE (Noise Floor Extension) "Off".

2. LNP (Low Noise Path) requires option LNP.

3. At higher frequency bands (beyond 3.6 GHz), Preamp "On" supersedes "LNP enabled". LNP cannot operate simultaneously with preamp.

Millimeter-Wave (Option 543, 544, 550)		Normal ¹ /LNP enabled ²	Normal ¹ /LNP enabled ²
Preamp off	3 Hz to 9 kHz		-100 dBm/NA nominal
	9 to 100 kHz	-146 dBm/NA	-152 dBm/NA typical
	100 kHz to 1 MHz	-150 dBm/NA	-156 dBm/NA typical
	1 to 10 MHz	-155 dBm/NA	-158 dBm/NA typical
	10 MHz to 1.2 GHz	-155 dBm/NA	-157 dBm/NA typical
	1.2 to 2.1 GHz	-153 dBm/NA	-155 dBm/NA typical
	2.1 to 3 GHz	-152 dBm/NA	-154 dBm/NA typical
	3 to 3.6 GHz	-151 dBm/NA	-153 dBm/NA typical
	3.5 to 4.2 GHz	-143 dBm/-150 dBm	-153 dBm/NA typical
	4.2 to 6.6 GHz	-144 dBm/-152 dBm	-147 dBm/-154 dBm typical
	6.6 to 8.4 GHz	-147 dBm/-154 dBm	-148 dBm/-155 dBm typical
	8.3 to 13.6 GHz	-147 dBm/-153 dBm	-149 dBm/-156 dBm typical
	13.5 to 14 GHz	-143 dBm/-150 dBm	-149 dBm/-152 dBm typical
	14 to 17 GHz	-145 dBm/-151 dBm	-146 dBm/-153 dBm typical
	17 to 22.5 GHz	-141 dBm/-149 dBm	-148 dBm/-152 dBm typical
	22.5 to 26.5 GHz	-139 dBm/-146 dBm	-146 dBm/-150 dBm typical
	26.4 to 34 GHz	-138 dBm/-146 dBm	-142 dBm/-149 dBm typical
	33.9 to 37 GHz	-134 dBm/-141 dBm	-139 dBm/-147 dBm typical
37 to 40 GHz	-132 dBm/-140 dBm	-138 dBm/-145 dBm typical	
40 to 46 GHz	-130 dBm/-140 dBm	-135 dBm/-145 dBm typical	
46 to 49 GHz	-130 dBm/-138 dBm	-135 dBm/-142 dBm typical	
49 to 50 GHz	-128 dBm/-138 dBm	-133 dBm/-142 dBm typical	
Preamp on Option P03, P08, P13, P26, P43, P44, P50 ³	100 to 200 kHz	-157 dBm/NA	-160 dBm/NA typical
	200 to 500 kHz	-160 dBm/NA	-163 dBm/NA typical
	500 kHz to 1 MHz	-162 dBm/NA	-165 dBm/NA typical
	1 to 10 MHz	-164 dBm/NA	-167 dBm/NA typical
	10 MHz to 2.1 GHz	-164 dBm/NA	-166 dBm/NA typical
	2.1 to 3.6 GHz	-163 dBm/NA	-164 dBm/NA typical
Option P08, P13, P26, P43, P44, P50 ³ Option P13, P26, P43, P44, P50 ³ Option P26, P43, P44, P50 ³	3.5 to 8.4 GHz	-161 dBm/NA	-163 dBm/NA typical
	8.3 to 13.6 GHz	-161 dBm/NA	-163 dBm/NA typical
	13.5 to 17 GHz	-161 dBm/NA	-163 dBm/NA typical
	17 to 20 GHz	-160 dBm/NA	-163 dBm/NA typical
Option P43, P44, P50 ³	20 to 26.5 GHz	-158 dBm/NA	-161 dBm/NA typical
	26.4 to 30 GHz	-157 dBm/NA	-159 dBm/NA typical
	30 to 34 GHz	-155 dBm/NA	-158 dBm/NA typical
	33.9 to 37 GHz	-153 dBm/NA	-157 dBm/NA typical
	37 to 40 GHz	-152 dBm/NA	-156 dBm/NA typical
Option P44, P50 ³	40 to 43 GHz	-149 dBm/NA	-154 dBm/NA typical
	43 to 44 GHz	-149 dBm/NA	-154 dBm/NA typical
Option P50 ³	44 to 46 GHz	-149 dBm/NA	-154 dBm/NA typical
	46 to 50 GHz	-146 dBm/NA	-150 dBm/NA typical

1. With the NFE (Noise Floor Extension) "Off".

2. LNP (Low Noise Path) requires option LNP.

3. At higher frequency bands (beyond 3.6 GHz), Preamp "On" supersedes "LNP enabled". LNP cannot operate simultaneously with preamp.

DANL with Noise Floor Extension (NFE) on		Improvement @ 95th percentile		
Millimeter-Wave (Option 543, 544, 550)		Preamp Off	Preamp On	LNP enabled ^{1,2}
Band 0, f > 20 MHz		10 dB	9 dB	N/A
Band 1		6 dB	5 dB	6 dB
Band 2		8 dB	8 dB	8 dB
Band 3		9 dB	8 dB	10 dB
Band 4		7 dB	6 dB	8 dB
Band 5		6 dB	6 dB	6 dB
Band 6		6 dB	5 dB	7 dB
Example of effective DANL Frequency 20 to 30 °C		Preamp Off	Preamp On	LNP enabled ^{1,2}
Mid-Band 0 (1.8 GHz)		-162 dBm	-172 dBm	N/A
Mid-Band 1 (5.95 GHz)		-151 dBm	-165 dBm	-158 dBm
Mid-Band 2 (10.95 GHz)		-152 dBm	-165 dBm	-158 dBm
Mid-Band 3 (15.3 GHz)		-152 dBm	-165 dBm	-158 dBm
Mid-Band 4 (21.75 GHz)		-149 dBm	-163 dBm	-155 dBm
Mid-Band 5 (30.4 GHz)		-144 dBm	-160 dBm	-151 dBm
Mid-Band 6 (42.7 GHz)		-139 dBm	-154 dBm	-147 dBm

1. LNP (Low Noise Path) requires option LNP.

2. At higher frequency bands (beyond 3.6 GHz), Preamp "On" supersedes "LNP enabled". LNP cannot operate simultaneously with preamp.

Residues, images, and spurious responses

Residual responses (Input terminated and 0 dB attenuation)	200 kHz to 8.4 GHz Zero span or FFT or other frequencies	-100 dBm -100 dBm nominal		
Image responses	Tuned Freq (f)	Excitation Freq	Response	
(Mixer level at -10 dBm)	10 MHz to 26.5 GHz	f+45 MHz	-80 dBc	-118 dBc typical
	10 MHz to 3.6 GHz	f+10,245 MHz	-80 dBc	-112 dBc typical
	10 MHz to 3.6 GHz	f+645 MHz	-80 dBc	-101 dBc typical
	3.5 to 13.6 GHz	f+645 MHz	-78 dBc	-87 dBc typical
	13.5 to 17.1 GHz	f+645 MHz	-74 dBc	-84 dBc typical
	17.0 to 22 GHz	f+645 MHz	-70 dBc	-82 dBc typical
	22 to 26.5 GHz	f+645 MHz	-68 dBc	-79 dBc typical
(Mixer level at -30 dBm)	26.5 to 34.5 GHz	f+645 MHz	-68 dBc	-84 dBc typical
	34.4 to 44 GHz	f+645 MHz	-57 dBc	-79 dBc typical
	44 to 50 GHz	f+645 MHz		-84 dBc typical
	Mixer level	Response		
Carrier frequency ≤ 26.5 GHz	First RF order (f ≥ 10 MHz from carrier)	-10 dBm	-80 dBc + 20log(N ¹) Including IF feedthrough, LO harmonic mixing responses	
		-40 dBm	-80 dBc + 20log(N ¹) Including higher order mixer responses	
Carrier frequency < 26.5 GHz	First RF order (f ≥ 10 MHz from carrier)	-30 dBm	-90 dBc nominal	
		-30 dBm	-90 dBc nominal	
LO-related spurious responses (200 Hz ≤ f < 10 MHz from carrier), Mixer level at -10 dBm		-68 dBc ² + 20log(N ¹)		
Line-related spurious responses		-73 dBc ² + 20log(N ¹) (nominal)		

Second harmonic distortion (SHI)

	Source frequency	Mixer level	Distortion ³	SHI ³
RF/MW (Option 503, 508, 513, 526)	10 to 100 MHz	-15 dBm	-57 dBc/NA	+42 dBm/NA
	0.1 to 1.8 GHz	-15 dBm	-60 dBc/NA	+45 dBm/NA
	1.75 to 2.5 GHz	-15 dBm	-77 dBc/-95 dBc	+62 dBm/+80 dBm
	2.5 to 4 GHz	-15 dBm	-77 dBc/-101 dBc	+62 dBm/+86 dBm
	4 to 6.5 GHz	-15 dBm	-77 dBc/-105 dBc	+62 dBm/+90 dBm
	6.5 to 10 GHz	-15 dBm	-70 dBc/-105 dBc	+55 dBm/+90 dBm
	10 to 13.25 GHz	-15 dBm	-62 dBc/-105 dBc	+47 dBm/+90 dBm
		Preamp level	Distortion	SHI
Preamp on (Option P03, P08, P13, P26)	10 MHz to 1.8 GHz	-45 dBm	-78 dBc nominal	+33 dBm nominal
	1.8 to 13.25 GHz	-50 dBm	-60 dBc nominal	+10 dBm nominal
Millimeter-Wave (Option 543, 544, 550)		Mixer level	Distortion	SHI
	10 to 100MHz	-15 dBm	-57 dBc/NA	+42 dBm/NA
	100 M to 1.8 GHz	-15 dBm	-60 dBc/NA	+45 dBm/NA
	1.8 to 2.5 GHz	-15 dBm	-72 dBc/-95 dBc	+57 dBm/+80 dBm
	2.5 to 3 GHz	-15 dBm	-72 dBc/-99 dBc	+57 dBm/+84 dBm
	3 to 5 GHz	-15 dBm	-77 dBc/-99 dBc	+62 dBm/+84 dBm
	5 to 6.5 GHz	-15 dBm	-77 dBc/-105 dBc	+62 dBm/+90 dBm
	6.5 to 10 GHz	-15 dBm	-70 dBc/-105 dBc	+55 dBm/+90 dBm
	10 to 13.25 GHz	-15 dBm	-62 dBc/-105 dBc	+47 dBm/+90 dBm
13.25 to 25 GHz	-15 dBm	-65 dBc/-105 dBc (nom.)	+50 dBm/+90 dBm (nom.)	
Preamp on (Option P03, P08, P13, P26, P43, P44, P50)		Preamp level	Distortion	SHI
	10 MHz to 1.8 GHz	-45 dBm	-78 dBc/NA (nominal)	+33 dBm/NA (nominal)
	1.8 to 13.25 GHz	-50 dBm	-60 dBm/NA (nominal)	+10 dBm/NA (nominal)
	13.25 to 25 GHz	-50 dBm	-50 dBm/NA (nominal)	0 dBm/NA (nominal)

1. N is the LO multiplication factor. Refer to page 4 for the N value versus frequency ranges.

2. Nominally -40 dBc under large magnetic (0.38 Gauss rms) or vibrational (0.21 g rms) environmental stimuli.

3. Normal path/LNP enabled (requires Option LNP).

Third-order intermodulation distortion (TOI)

(two -16 dBm tones at input mixer with tone separation > 5 times IF prefilter bandwidth, 20 to 30 °C)

	TOI		
	10 to 150 MHz	+13 dBm	+16 dBm typical
	150 to 600 MHz	+18 dBm	+21 dBm typical
	0.6 to 1.1 GHz	+20 dBm	+22 dBm typical
	1.1 to 3.6 GHz	+21 dBm	+23 dBm typical
	3.5 to 8.4 GHz	+15 dBm	+22 dBm typical
	8.3 to 13.6 GHz	+15 dBm	+23 dBm typical
	13.5 to 17 GHz	+11 dBm	+17 dBm typical
	17 to 26.5 GHz	+10 dBm	+17 dBm nominal
	26.5 to 50 GHz		+13 dBm nominal
Preamp on (Option P03, P08, P13, P26, P43, P44, and P50)			
Tones at preamp input (two -45 dBm)			
	10 to 500 MHz		+4 dBm nominal
(two -45 dBm)	500 MHz to 3.6 GHz		+4.5 dBm nominal
(two -50 dBm)	3.6 to 26.5 GHz		-15 dBm nominal

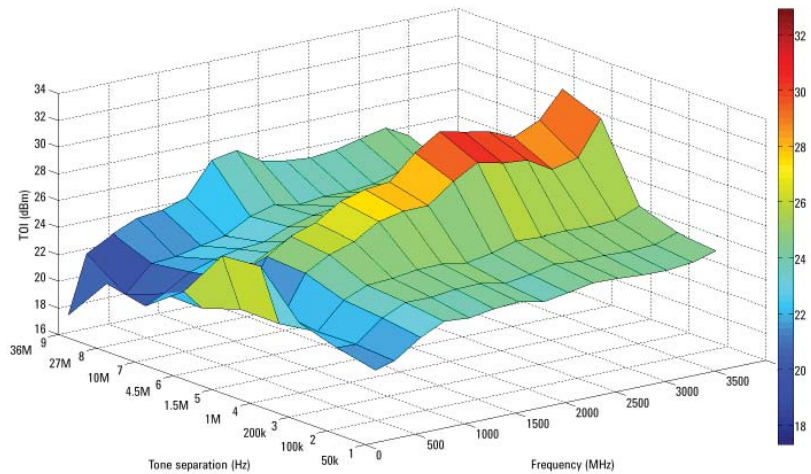


Figure 1. Nominal TOI performance versus frequency and tone separation

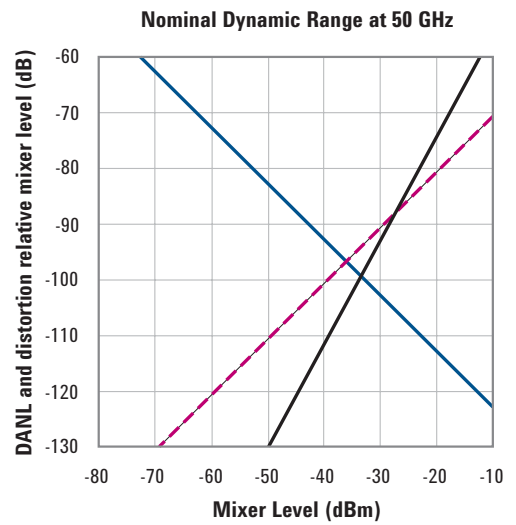
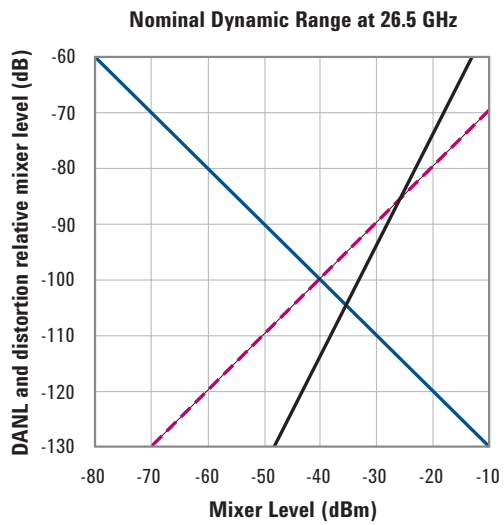
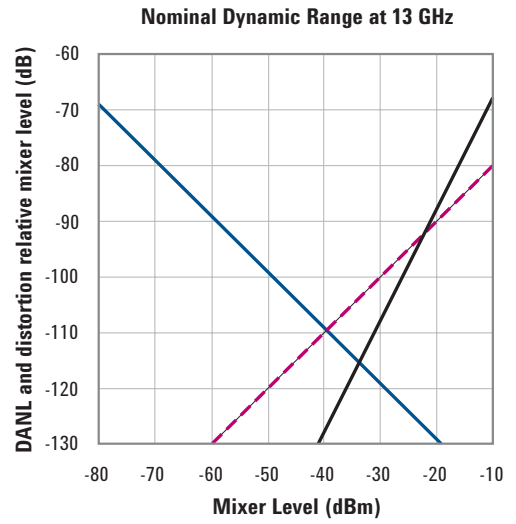
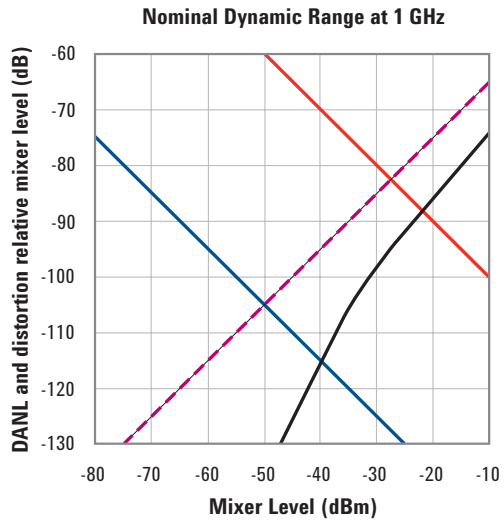


Figure 2a. Third-order dynamic range plots

Figure 2b. Third-order dynamic range plots

- DANL (30 kHz RBW)
- DANL (1 Hz RBW)
- - - 2nd Harmonic Distortion
- 3rd Order Intermodulation

Phase noise	Offset	Specification	Typical
Noise sidebands (20 to 30 °C, CF = 1 GHz)	10 Hz		-75 dBc/Hz nominal
	100 Hz	-94 dBc/Hz	-100 dBc/Hz typical
	1 kHz	-121 dBc/Hz	-125 dBc/Hz typical
	10 kHz	-129 dBc/Hz	-132 dBc/Hz typical
	30 kHz	-130 dBc/Hz	-132 dBc/Hz typical
	100 kHz	-129 dBc/Hz	-131 dBc/Hz typical
	1 MHz	-145 dBc/Hz	-146 dBc/Hz typical
	10 MHz	-155 dBc/Hz	-158 dBc/Hz typical

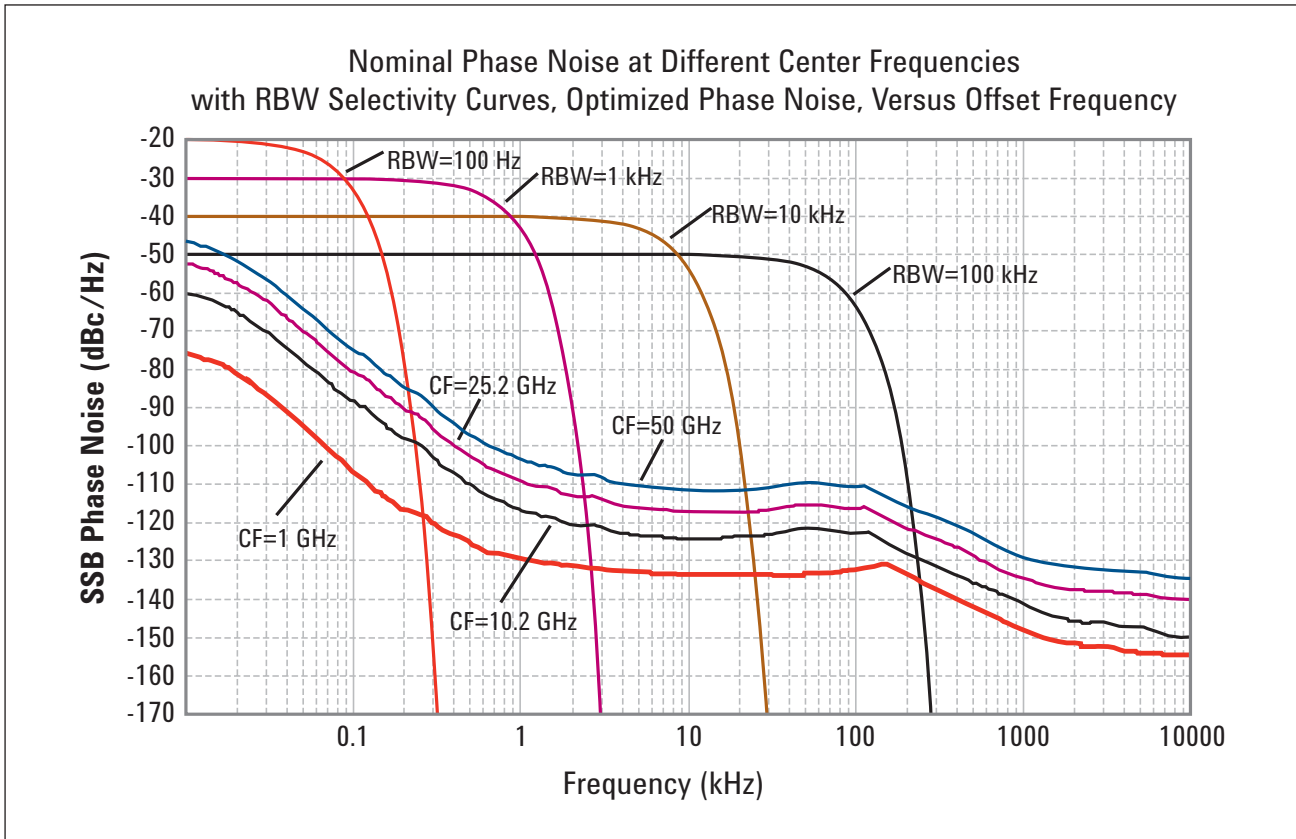


Figure 3. Nominal PXA phase noise at various center frequencies

Option MPB, microwave preselector bypass ¹	
Frequency range	
N9030A-508	3.6 to 8.4 GHz
N9030A-513	3.6 to 13.6 GHz
N9030A-526	3.6 to 26.5 GHz
N9030A-543	3.6 to 43 GHz
N9030A-544	3.6 to 44 GHz
N9030A-550	3.6 to 50 GHz

1. When Option MPB is installed and enabled, some aspects of the analyzer performance change. Please refer to the PXA specification guide for more details.

PowerSuite Measurement Specifications

Channel power		
Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, attenuation = 10 dB)	± 0.61 dB (± 0.19 dB 95th percentile)	
Occupied bandwidth		
Frequency accuracy	± [span/1000] nominal	
Adjacent channel power		
Accuracy, 3GPP W-CDMA (ACLR) (at specific mixer levels and ACLR ranges)	Adjacent	Alternate
MS (UE)	± 0.09 dB	± 0.16 dB
BTS	± 0.18 dB	± 0.31 dB
Dynamic range (typical)		
Without noise correction	–82.5 dB	–87 dB
With noise correction	–83.5 dB (–88 dB ¹)	–89 dB
Offset channel pairs measured	1 to 6	
Multi-carrier ACP		
Accuracy, 3GPP W-CDMA (ACPR) (4 carriers, 5 MHz offset, BTS, UUT ACPR range at –42 to –48 dB, optimal mixer level at –21 dBm)	± 0.13 dB	
Multiple number of carriers measured	Up to 12	
Power statistics CCDF		
Histogram resolution	0.01 dB	
Harmonic distortion		
Maximum harmonic number	10th	
Result	Fundamental power (dBm), relative harmonics power (dBc), total harmonic distortion in %	
Intermod (TOI)	Measure the third-order products and intercepts from two tones	
Burst power		
Methods	Power above threshold, power within burst width	
Results	Single burst output power, average output power, maximum power, minimum power within burst, burst width	
Spurious emission		
3GPP W-CDMA table-driven spurious signals; search across regions		
Dynamic range (1 to 3.6 GHz)	97.1 dB	(101.9 dB typical)
Absolute sensitivity (1 to 3.6 GHz)	–86.4 dBm	(–90.4 dBm typical)
Spectrum emission mask (SEM)		
cdma2000® (750 kHz offset)		
Relative dynamic range	81.6 dB	(86.4 dB typical)
Absolute sensitivity	–101.7 dBm	(–105.7 dBm typical)
Relative accuracy	± 0.08 dB	
3GPP W-CDMA (2.515 MHz offset)		
Relative dynamic range	85.4 dB	(89.8 dB typical)
Absolute sensitivity	–101.7 dBm	(–105.7 dBm typical)
Relative accuracy	± 0.08 dB	

1. Nominal value base on hand-measured results from early production units. These observations were done near 2 GHz, the common W-CDMA operating region.

General Specifications

Temperature range	
Operating	0 to 55 °C
Storage	–40 to +70 °C
Altitude	
	4,500 meters (approx 14,760 feet)
EMC	
Complies with European EMC Directive 2004/108/EC	
<ul style="list-style-type: none"> • IEC/EN 61326-1 or IEC/EN 61326-2-1 • CISPR Pub 11 Group 1, class A¹ • AS/NZS CISPR 11:2002 • ICES/NMB-001 	
This ISM device complies with Canadian ICES-001	
Cet appareil ISM est conforme à la norme NMB-001 du Canada	
Safety	
Complies with European Low Voltage Directive 73/23/EEC, amended by 93/68/EEC	
<ul style="list-style-type: none"> • IEC/EN 61010-1 2nd Edition • Canada: CSA C22.2 No. 61010-1 • USA: UL 61010-1 2nd Edition 	
Acoustic noise	
Acoustic noise emission	Geraeuschemission
LpA < 70 dB	LpA < 70 dB
Operator position	Am Arbeitsplatz
Normal position	Normaler Betrieb
Per ISO 7779	Nach DIN 45635 t.19
Acoustic noise - more information	
(Values given are per ISO 7779 standard in the “Operator Sitting” position)	
Ambient temperature < 40 °C	Nominally under 55 dBA Sound Pressure. 55 dBA is generally considered suitable for use in quiet office environment
≥ 40 °C	Nominally under 65 dBA Sound Pressure. 65 dBA is generally considered suitable for use in noisy office environment
Environmental stress	
Samples of this product have been type tested in accordance with the Agilent Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MILPRF-28800F Class 3.	
Power requirements	
Voltage and frequency (nominal)	100 to 120 V, 50/60/400 Hz 220 to 240 V, 50/60 Hz
Power consumption	
On	450 W (fully loaded with options)
Standby	40 W

1. The N9030A is in full compliance with CISPR 11, Class A emissions and is declared as such. In addition, the N9030A has been type tested and shown to meet CISPR 11, Class B emissions limits. Information regarding the Class B emission performance of the N9030A is provided as a convenience to the user and is not intended to be a regulatory declaration.

Display

Resolution	1024 x 768, XGA
Size	213 mm (8.4 in.) diagonal (nominal)

Data storage

Internal	Removable solid state drive (80 GB)
External	Supports USB 2.0 compatible memory devices

Weight (without options)

Net	22 kg (48 lbs) nominal
Shipping	34 kg (75 lbs) nominal

Dimensions

Height	177 mm (7.0 in)
Width	426 mm (16.8 in)
Length	556 mm (21.9 in)

Warranty

The PXA signal analyzer is supplied with a one-year standard warranty

Calibration cycle

The recommended calibration cycle is one year. Calibration services are available through Agilent service centers

Inputs and Outputs

Front panel	
RF input Connector Standard (Option 503, 508, 513, 526) Option C35 (with Option 526 only) Standard (Option 543, 544, 550)	Type-N female, 50 Ω nominal APC 3.5 mm male, 50 Ω nominal 2.4 mm male, 50 Ω nominal
Probe power Voltage/current	+15 Vdc, \pm 7% at 150 mA max nominal –12.6 Vdc, \pm 10% at 150 mA max nominal
USB 2.0 ports Master (2 ports) Standard Connector Output current	Compatible with USB 2.0 USB Type-A female 0.5 A nominal
Headphone jack	Miniature stereo audio jack (3.5 mm, also known as “1/8 inch”)
External mixing, Option EXM	
Connection port Connector Impedance Functions	SMA, female 50 Ω nominal Triplexed for mixer bias, IF input and LO output
Mixer bias range	\pm 10 mA in 10 μ A step
IF input center frequency Narrowband IF path 40 MHz BW IF path	322.5 MHz 250.0 MHz
LO output frequency range	3.75 to 14.0 GHz
Rear panel	
10 MHz out Connector Output amplitude Frequency	BNC female, 50 Ω nominal \geq 0 dBm nominal 10 MHz + (10 MHz x frequency reference accuracy)
Ext Ref In Connector Input amplitude range Input frequency Frequency lock range	BNC female, 50 Ω nominal –5 to 10 dBm nominal 1 to 50 MHz nominal (selectable to 1 Hz resolution) \pm 5 x 10 ^{–6} of specified external reference input frequency
Trigger 1 and 2 inputs Connector Impedance Trigger level range	BNC female > 10 k Ω nominal –5 to +5 V (TTL) factory preset
Trigger 1 and 2 outputs Connector Impedance Level	BNC female 50 Ω nominal 0 to 5 V (CMOS) nominal
Sync (reserved for future use) Connector	BNC female
Monitor output Connector Format Resolution	VGA compatible, 15-pin mini D-SUB XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB 1024 x 768
Noise source drive +28 V (pulsed) Connector Output voltage	BNC female On 28.0 \pm 0.1 V (60 mA maximum) Off < 1 V
SNS series noise source	For use with the Agilent Technologies SNS Series noise sources
Digital bus (reserved for future use) Connector	MDR-80

Rear panel	
Analog out Connector	BNC female
USB 2.0 ports Master (4 ports) Standard Connector Output current Slave (1 port) Standard Connector Output current	Compatible with USB 2.0 USB Type-A female 0.5 A nominal Compatible with USB 2.0 USB Type-B female 0.5 A nominal
GPIB interface Connector GPIB codes GPIB mode	IEEE-488 bus connector SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0 Controller or device
LAN TCP/IP interface Standard Connector	1000Base-T RJ45 Ethertwist
IF output Connector Impedance	SMA female, shared by Opts CR3, CRP, and ALV 50 Ω nominal
2nd IF output, Option CR3	
Center frequency SA mode or I/Q analyzer with IF BW \leq 25 MHz with Option B40 with Option B1X	322.5 MHz 250 MHz 300 MHz
Conversion gain	-1 to +4 dB (nominal) plus RF frequency response
Bandwidth Low band High band, with preselector High band, with preselector bypassed ¹	Up to 140 MHz (nominal) Depends on center frequency Up to 700 MHz
Arbitrary IF output, Option CRP	
Center frequency Range Resolution	10 to 75 MHz (user selectable) 0.5 MHz
Conversion gain	-1 to +4 dB (nominal) plus RF frequency response
Bandwidth Output at 70 MHz Low band or high band with preselector bypassed Preselected band	100 MHz (nominal) Depends on RF center frequency
Lower output frequencies	Subject to folding
Residual output signals	\leq -88 dBm (nominal)

Other Optional Output

Option ALV Log video out

General port specifications		
Connector	SMA female	Shared with other options
Impedance		50 Ω nominal
Fast log video output		
Output voltage	Open-circuit voltages shown	
Maximum	1.6 V at -10 dBm nominal	
Slope	25 \pm 1 mV/dB nominal	
Log fidelity		
Range	57 dB nominal	
Accuracy within range	\pm 1.0 dB nominal	
Rise time	15 ns nominal	
Fall time		
Bands 1-4 with Option MPB	40 ns nominal best case,	
Other cases	Depends on bandwidth	

Option YAV Y-Axis output

General port specifications		
Connector	SMA female	Shared with other options
Impedance		50 Ω nominal
Screen video		
Operating conditions		
Display scale types	Log or Lin	"Lin" is linear in voltage
Log scales	All (0.1 to 20 dB/div)	
Modes	Spectrum analyzer only	
Gating	Gating must be off	
Output scaling	0 to 1.0 V open circuit, representing bottom to top of screen	
Offset	\pm 1% of full scale nominal	
Gain accuracy	\pm 1% of output voltage nominal	
Delay between RF input to analog output	71.7 μ s + 2.56/RBW + 0.159/VBW nominal	
Log video (Log envelope) output		
Amplitude range (terminated with 50 Ω)		
Maximum	1.0 V nominal for -10 dBm at the mixer	
Scale factor	1 V per 192.66 dB	
Bandwidth	Set by RBW	
Operating conditions	Select Sweep Type = Swept	
Linear video (AM Demod) output		
Amplitude range (terminated with 50 Ω)		
Maximum	1.0 V nominal for signal envelope at the reference level	
Minimum	0 V	
Scale factor	If carrier level is set to half the reference level in volts, the scale factor is 200% of carrier level per volt. Regardless of the carrier level, the scale factor is 100% of reference level per volt.	
Bandwidth	Set by RBW	
Operating conditions	Select Sweep Type = Swept	

I/Q Analyzer

Frequency					
Frequency span					
Standard instrument	10 Hz to 10 MHz				
Option B25	10 Hz to 25 MHz				
Option B40	10 Hz to 40 MHz				
Option B1X	10 Hz to 140 MHz				
Resolution bandwidth (spectrum measurement)					
Range					
Overall	100 mHz to 3 MHz				
Span = 1 MHz	50 Hz to 3 MHz				
Span = 10 kHz	1 Hz to 10 kHz				
Span = 100 Hz	100 mHz to 100 Hz				
Window shapes	Flat Top, Uniform, Hanning, Hamming, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70 dB, K-B 90 dB and K-B 110 dB)				
Analysis bandwidth (waveform measurement)					
Standard instrument	10 Hz to 10 MHz				
Option B25	10 Hz to 25 MHz				
Option B40	10 Hz to 40 MHz				
Option B1X	10 Hz to 140 MHz				
IF frequency response (standard 10 MHz IF path)					
IF frequency response (demodulation and FFT response relative to the center frequency)					
Freq (GHz)	Analysis BW (MHz)	Max error	Midwidth error (95th percentile)	Slope (dB/MHz) (95th percentile)	RMS (nominal)
≤ 3.6	≤ 10	± 0.20 dB	± 0.12 dB	± 0.10 dB	0.02 dB
3.6 to 26.5	≤ 10 preselected				0.23 dB
3.6 to 26.5	≤ 10 preselector off ¹	± 0.25 dB	± 0.12 dB	± 0.10 dB	0.02 dB
26.5 to 50	≤ 10 preselected				0.12 dB
26.5 to 50	≤ 10 preselected off ¹	± 0.30 dB	± 0.12 dB	± 0.10 dB	0.024 dB
IF phase linearity					
Center freq (GHz)	Span (MHz)	Preselector	Peak-to-peak (nominal)	RMS (nominal)	
≥ 0.02, < 3.6	≤ 10	NA	0.06°	0.012°	
≥ 3.6 to ≤ 26.5	≤ 10	Off ¹	0.10°	0.022°	
≥ 3.6	≤ 10	On	0.11°	0.024°	
Dynamic range (standard 10 MHz IF path)					
Clipping-to-noise dynamic range				Excluding residuals and spurious responses	
Clipping level at mixer				Center frequency ≥ 20 MHz	
IF gain = Low	-10 dBm			-8 dBm nominal	
IF gain = High	-20 dBm			-17.5 dBm nominal	
Noise density at mixer at center frequency	(DANL + IF Gain effect) + 2.25 dB				
Data acquisition (standard 10 MHz IF path)					
Time record length					
Complex spectrum	131,072 samples (max)		Res BW ~540 Hz for 10 MHz (standard) span		
Waveform	4,000,000 samples (max) ²		4,000,000 samples ~335 ms at 10 MHz span		
Sample rate	100 MSa/s				
ADC resolution	16 Bits		For 10 MHz (standard) span		

1. Option MPB is installed and enabled.

2. For deep capture, we recommend the use of the 89600B vector signal analysis (VSA) software or the N9064A.

I/Q Analyzer (continued)

Option B25 25 MHz analysis bandwidth (Option B25 is automatically included in Option 40 or B1X)

IF frequency response (B25 IF path)					
IF frequency response (demodulation and FFT response relative to the center frequency)					
Freq (GHz)	Analysis BW (MHz)	Max error	Midwidth error (95th percentile)	Slope (dB/MHz) (95th percentile)	RMS (nominal)
< 3.6	10 to ≤ 25	± 0.30 dB	± 0.12 dB	± 0.05 dB	0.02 dB
3.6 to 26.5	10 to ≤ 25 preselected				0.50 dB
3.6 to 26.5	10 to ≤ 25 preselector off ¹	± 0.40 dB			0.03 dB
26.5 to 50	10 to ≤ 25 preselected				0.31 dB
26.5 to 50	10 to ≤ 25 preselector off ¹	± 0.40 dB			0.02 dB
IF phase linearity					
Center freq (GHz)	Span (MHz)	Preselector	Peak-to-peak (nominal)	RMS (nominal)	
≥ 0.02, < 3.6	≤ 25	NA	0.14°	0.028°	
≥ 3.6	≤ 25	Off ¹	0.25°	0.043°	
Dynamic range (B25 IF path)					
Full scale (ADC clipping)					
Default settings, signal at CF (IF gain = Low)					
Band 0	-8 dBm mixer level nominal				
Bands 1 through 4	-7 dBm mixer level nominal				
High gain setting, signal at CF (IF gain = High)					
Band 0	-18 dBm mixer level nominal, subject to gain limitations				
Bands 1 through 4	-17 dBm mixer level nominal, subject to gain limitations				
Effect of signal frequency ≠ CF	Up to ± 3 dB nominal				
Data acquisition (B25 IF path)					
Time record length					
Complex spectrum	131,072 samples (max)		Res BW ~900 Hz for 25 MHz (standard) span		
Waveform	4,000,000 samples (MAX) ²		4,000,000 samples ~128 ms at 25 MHz span		
Sample rate	100 MSa/s				
ADC resolution	16 Bits				

1. Option MPB is installed and enabled.

2. For deep capture, we recommend the use of the 89600B vector signal analysis (VSA) software or the N9064A.

I/Q Analyzer (continued)

Option B40 40 MHz analysis bandwidth (Option B40 is automatically included in Option B1X)

IF frequency response (B40 IF path)					
IF frequency response				Relative to center frequency	
Center freq. (GHz)	Span (MHz)	Preselector		Typical	RMS (nominal)
≥ 0.03, < 3.6	≤ 40	NA	± 0.4 dB	± 0.25 dB	0.05 dB
≥ 3.6, ≤ 8.4	≤ 40	Off ¹	± 0.4 dB	± 0.16 dB	0.05 dB
> 8.4, ≤ 26.5	≤ 40	Off ¹	± 0.7 dB	± 0.20 dB	0.05 dB
≥ 26.5, < 34.4	≤ 40	Off ¹	± 0.8 dB	± 0.25 dB	0.1 dB
≥ 34.4, < 50	≤ 40	Off ¹	± 1.0 dB	± 0.35 dB	0.1 dB
IF phase linearity (deviation from mean phase linearity)					
Center freq (GHz)	Span (MHz)	Preselector		Peak-to-peak (nominal)	RMS (nominal)
≥ 0.03, < 3.6	≤ 40	NA		0.078°	0.017°
≥ 3.6	≤ 40	Off ¹		0.37°	0.1°
EVM (EVM measurement floor for an 802.11g OFDM signal, using 89600B software equalization, channel estimation and data EQ)					
2.4 GHz				-52.0 dB (0.25%) nominal	
5.8 GHz with Option MPB				-49.1 dB (0.35%) nominal	
Dynamic range (B40 IF path)					
SFDR					
(Spurious-free dynamic range)					
Signal frequency within ±12 MHz of center	-80 dBc nominal				
Signal frequency anywhere within analysis BW					
Spurious response within ± 18 MHz of center	-79 dBc nominal				
Response anywhere within analysis BW	-77 dBc nominal				
Full scale (ADC clipping)					
Default settings, signal at CF (IF gain = Low: IF gain offset = 0 dB)					
Band 0	-8 dBm mixer level nominal				
Bands 1 through 4	-7 dBm mixer level nominal				
High gain setting, signal at CF (IF gain = High)					
Band 0	-18 dBm mixer level nominal, subject to gain limitations				
Bands 1 through 4	-17 dBm mixer level nominal, subject to gain limitations				
Effect of signal frequency ≠ CF	Up to ± 3 dB nominal				

1. Option MPB is installed and enabled.

I/Q Analyzer (continued)

Option B40 40 MHz analysis bandwidth

Data acquisition (B40 IF path)			
Time record length IQ analyzer	4,000,000 IQ sample pairs		
89600B VSA or N9064A VXA Length (IQ sample pairs) Length (Time)	32-bit data packing 536 MSa (2 ²⁹ Sa)	64-bit data packing 268 MSa (2 ²⁸ Sa)	2 GB total memory Sample/(Span x 1.28)
Sample rate At ADC IQ pairs ADC resolution	200 MSa/s 12 Bits	Span x 1.28	

I/Q Analyzer (continued)

Option B1X 140 MHz analysis bandwidth

IF frequency response (B1X IF path)					
IF frequency response				Relative to center frequency	
Center freq. (GHz)	Span (MHz)	Preselector		Typical	RMS (nominal)
≥ 0.1, < 3.6	≤ 80	NA	± 0.6 dB	± 0.17 dB	0.05 dB
	≤ 140	NA	± 0.6 dB	± 0.25 dB	0.05 dB
≥ 3.6, ≤ 8.4	≤ 80	Off ¹	± 0.73 dB	± 0.2 dB	0.05 dB
	≤ 140	Off ¹	± 0.8 dB	± 0.35 dB	0.05 dB
> 8.4, ≤ 26.5	≤ 80	Off ¹	± 1.10 dB	± 0.50 dB	0.1 dB
	≤ 140	Off ¹	± 1.30 dB	± 0.75 dB	0.1 dB
≥ 26.5, ≤ 50	≤ 80	Off ¹	± 1.20 dB	± 0.45 dB	0.12 dB
	≤ 140	Off ¹	± 1.40 dB	± 0.65 dB	0.12 dB
IF phase linearity (deviation from mean phase linearity)					
Center freq (GHz)	Span (MHz)	Preselector		Peak-to-peak (nominal)	RMS (nominal)
≥ 0.03, < 3.6	≤ 140	NA		0.11°	0.02°
≥ 3.6,	≤ 140	Off ¹		1.3°	0.3°
EVM (EVM measurement floor)	Customized settings required, preselector bypassed (Option MPB) above Band 0				
Case 1: 62.5 Msymbol/s, 16QAM signal, RRC filter alpha of 0.2, non-equalized, with approximately 75 MHz occupied bandwidth					
Band 0, 1.8 GHz	0.8% nominal				
Band 1, 5.95 GHz	1.1% nominal				
Case 2: 104.167 Msymbol/s, 16QAM signal, RRC filter alpha of 0.35, non-equalized, with approximately 140 MHz occupied bandwidth					
Band 1, 5.95 GHz	3.0% nominal, (unequalized)		0.5% nominal, (equalized)		
Band 2, 15.3 GHz	2.5% nominal, (unequalized)		0.6% nominal, (equalized)		
Band 4, 26 GHz	3.5% nominal, (unequalized)		1.6% nominal, (equalized)		
Effect of signal frequency ≠ CF	Up to ± 3 dB nominal				

1. Option MPB is installed and enabled.

I/Q Analyzer (continued)

Option B1X 140 MHz analysis bandwidth

Dynamic range (B1X IF path)			
SFDR (Spurious-free dynamic range)			
Signal frequency within ± 12 MHz of center	-75 dBc nominal		
Signal frequency anywhere within analysis BW			
Spurious response within ± 63 MHz of center	-74 dBc nominal		
Response anywhere within analysis BW	-72 dBc nominal		
Full scale (ADC clipping)			
Default settings, signal at CF (IF gain = Low: IF gain offset = 0 dB)			
Band 0	-8 dBm mixer level nominal		
Band 1 through 4	-7 dBm mixer level nominal		
High gain setting, signal at CF (IF gain = High)			
Band 0	-18 dBm mixer level nominal, subject to gain limitations		
Band 1 through 4	-17 dBm mixer level nominal, subject to gain limitations		
Effect of signal frequency \neq CF	Up to ± 3 dB nominal		
Data acquisition (B1X IF path)			
Time record length IQ analyzer			
	4,000,000 IQ sample pairs		
89600B VSA or N9064A VXA			
Length (IQ sample pairs)	32-bit data packing	64-bit data packing	2 GB total memory
Length (Time)	536 MSa (2^{29} Sa)	268 MSa (2^{28} Sa)	Sample/(Span x 1.28)
Sample rate			
At ADC	400 MSa/s		
IQ pairs	Span x 1.28		
ADC resolution	14 Bits		

Related Literature

Agilent PXA signal analyzers

Brochure 5990-3951EN

Configuration guide 5990-3953EN

For more information or literature resources please visit the web:

www.agilent.com/find/pxa

Additional information, including literature, can be found at the Agilent website:

www.agilent.com/find/PXA

www.agilent.com/find/xseries_apps



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

cdma2000® is a registered certification mark of the Telecommunications Industry Association. Used under license.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. We share measurement and service expertise to help you create the products that change our world. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair, reduce your cost of ownership, and move us ahead of your development curve.

www.agilent.com/find/advantageservices



www.agilent.com/quality

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3500
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 9276201

For other unlisted countries:

www.agilent.com/find/contactus

Revised: October 14, 2010

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2011
Printed in USA, May 29, 2011
5990-3952EN



Agilent Technologies