



MODEL 751TC • 750 VA POWER OUTPUT
 • 0-130 and 0-260 VRMS Output Ranges • 45 Hz to 5 KHz Frequency Response • 115, 208, 220, 230, or 240V, 48 to 65 Hz, 1 ϕ Input • 7" H x 19" W x 21" D — 100 lbs.

Two units may be connected for 1500VA two phase or three phase open Delta. Three units provide 2250VA three phase four wire wye with single or three phase input power.

NEW

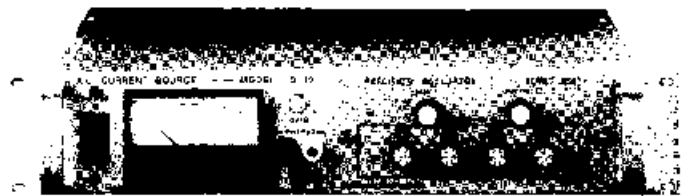


CURRENT SOURCE SERIES • 1 TO 200 AMPS • 37 Models
 • 60VA to 1800VA • Compliance voltages from 2V to 100VRMS • 45Hz to 5KHz, except 2KHz on 1800VA model • 115, 208, 220, 230 or 240V, 48 to 65Hz input.

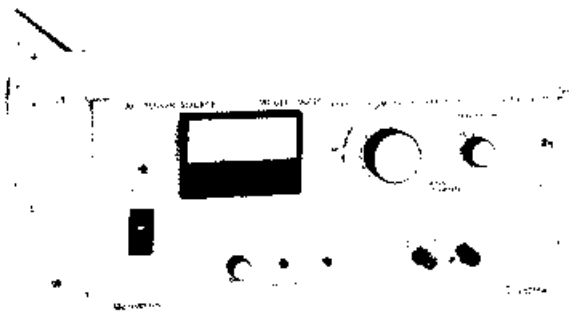

MODEL 1001TC • 1000 VA POWER OUTPUT

- Two Selectable Outputs • 0-130V, 0-260V RMS
- 45 Hz to 5 KHz Frequency Response • 115, 208, 220, 230 or 240V, 48 to 65 Hz, 1 ϕ Input • 8 $\frac{3}{4}$ " H x 19" W x 21" D — 140 lbs.


Two units may be connected for 2000VA two phase or three phase open delta. Three units will provide 3000VA three phase four wire wye with single or three phase input power.

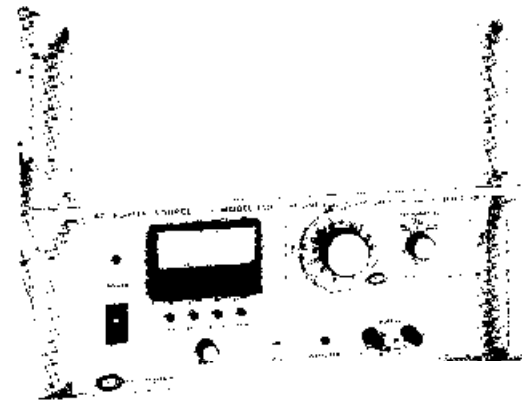

MODEL 1501TC • 1500 VA POWER OUTPUT

- Four Card Selectable Outputs • 0-32.5V, 0-65V, 0-130V, 0-260V RMS • 45 Hz to 5 KHz Frequency Response • 115V or 210-250V, 48 to 65 Hz, 1 ϕ Input • 14" H x 19" W x 21" D — 180 lbs.


Two units may be connected for 3 KVA two phase or three phase open delta. Three units will provide 4.5 KVA three phase four wire wye with single or three phase input power.

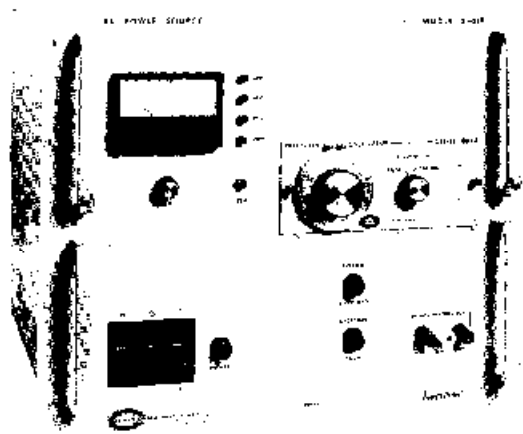

MODEL 2501T • 2500 VA POWER OUTPUT

- Four Card Selectable Outputs • 0-30V, 0-60V, 0-120V, 0-240V RMS • 45 Hz to 2 KHz Frequency Response • 208, 220, 230, 370, 416, 440, 460V, 48 to 85 Hz, 3 ϕ Input • 15 $\frac{3}{4}$ " H x 19" W x 21" D — 240 lbs.

Two units may be connected for 5 KVA two phase or three phase open delta. Three units will provide 7.5KVA three phase four wire wye.

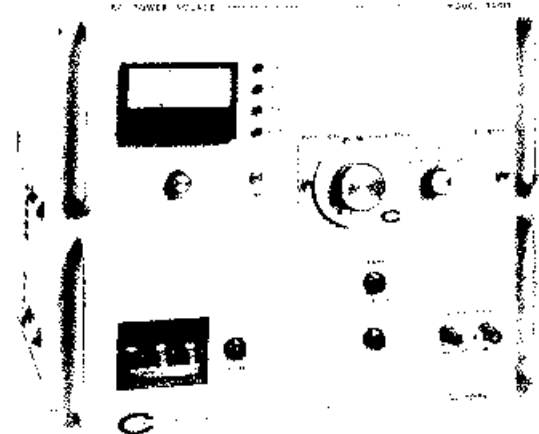

MODEL 3001TC • 3 KVA POWER OUTPUT

- Four Card Selectable Outputs • 0-32.5V, 0-65V, 0-130V, 0-260V RMS • 45 Hz to 2 KHz Frequency Response • 115, 208, 220, 230 or 240V, 48 to 65 Hz, 3 ϕ Input • 15 $\frac{3}{4}$ " H x 19" W x 21" D — 240 lbs.

Two units may be connected for 6 KVA two phase or three phase open delta. Three units provide 9 KVA three phase four wire wye.