



FLUKE®

Calibration

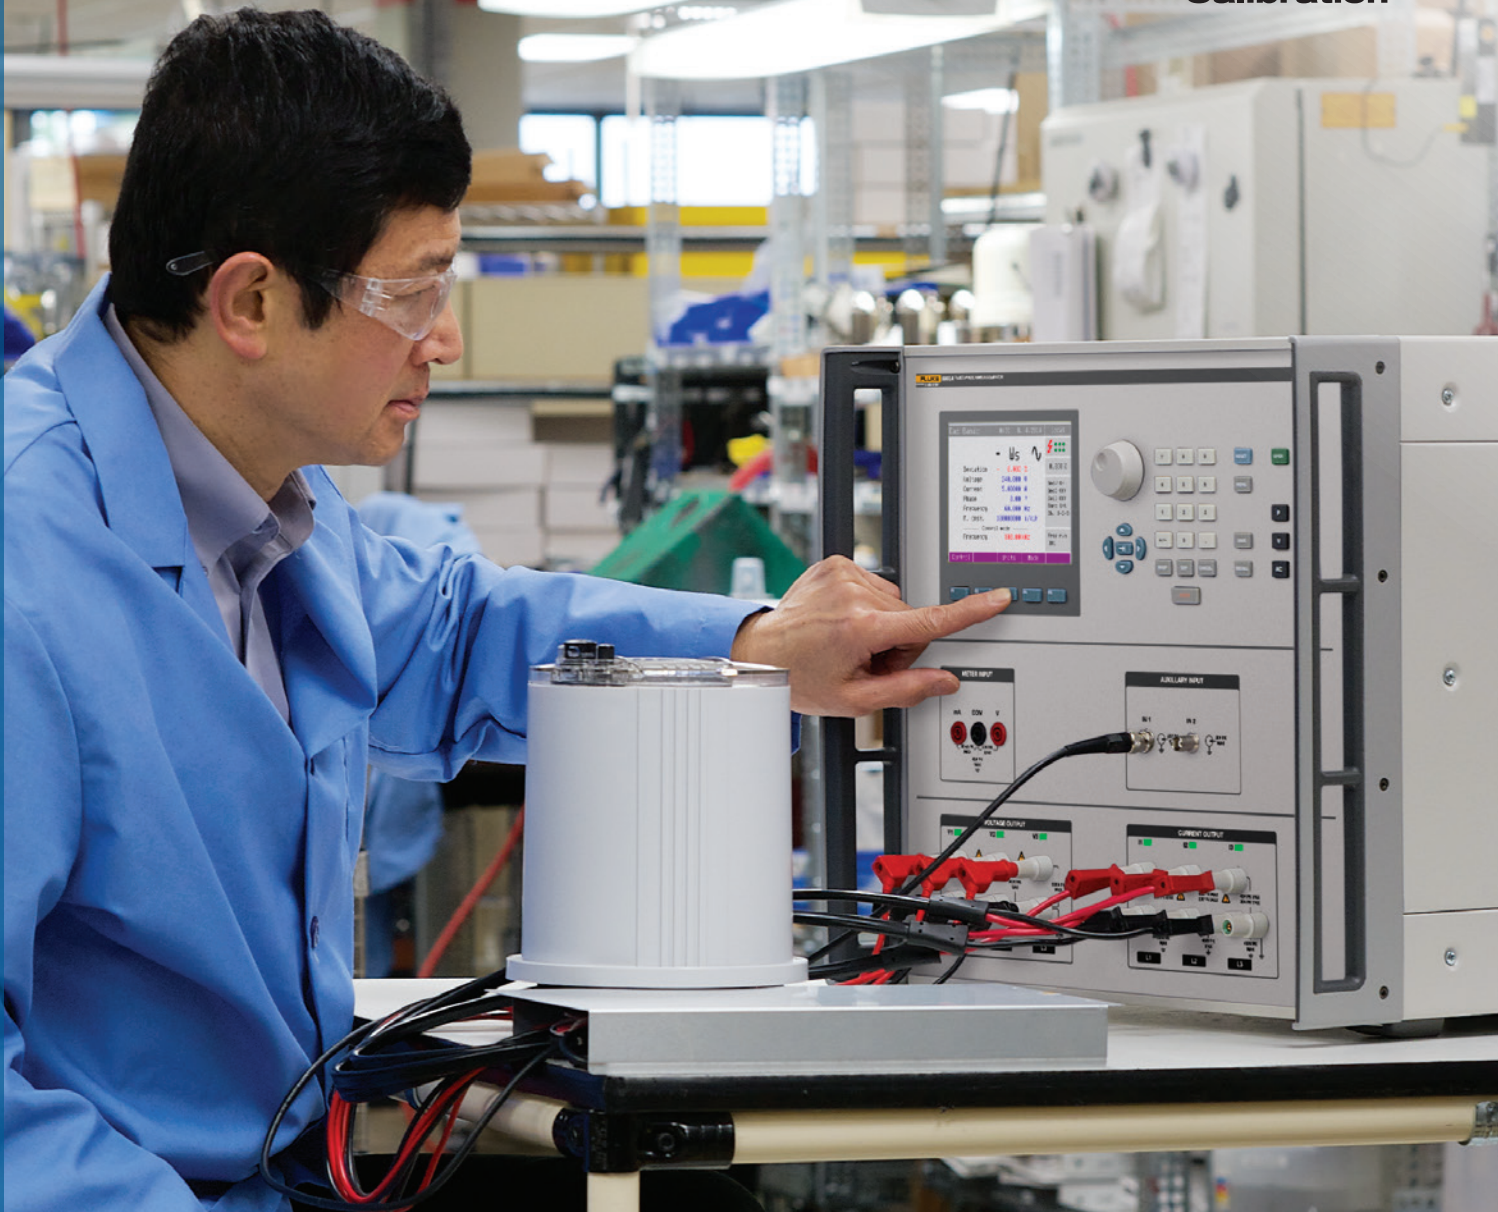

6003A Three Phase Power Calibrator

Compact, accurate three-phase power

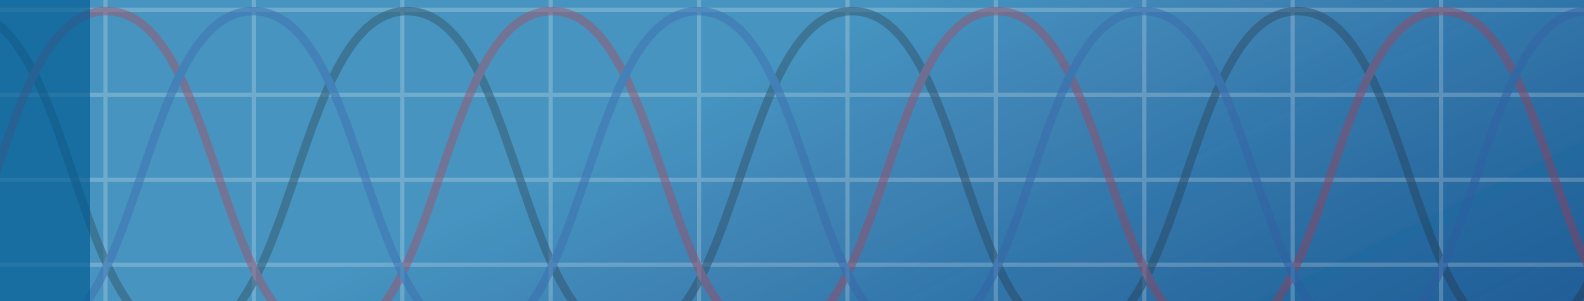

Three power phases in a single easy-to-use instrument



Accurate performance for the calibration laboratory

The Fluke Calibration 6003A Three Phase Electrical Power Calibrator is the most cost-effective way to get the superior accuracy and performance of three independent phases in one instrument. It is an ideal solution for calibration laboratories, electronics manufacturing companies, electric utility meter shops, and other organizations that manufacture and maintain energy meters, power quality analyzers, and similar tools.

Until now, many of these engineers and technicians have been testing three-phase devices with a single-phase series-parallel technique, because the cost of available three-phase sources with acceptable accuracies has put true polyphase testing out of reach. With the 6003A, these professionals can now afford three-phase performance, accuracy, and ease


of use. More importantly, they can now test multi-phase meters in conditions that reflect their actual usage.

Along with providing three independent phases of precise voltage and current, the 6003A also sources power quality phenomena, including harmonics, interharmonics, flicker (modulation) and dip/swell variations.

The 6003A includes measurement capabilities for dc voltage, dc current and frequency for measuring outputs from power and energy transducers.

As a single instrument, the 6003A is easier to transport and takes up less space on the bench or cart than multi-piece units. The 6003A delivers all of this functionality with a graphical user interface that makes it remarkably easy to learn and use.

6003A Three Phase Electrical Power Standard FEATURES at a GLANCE

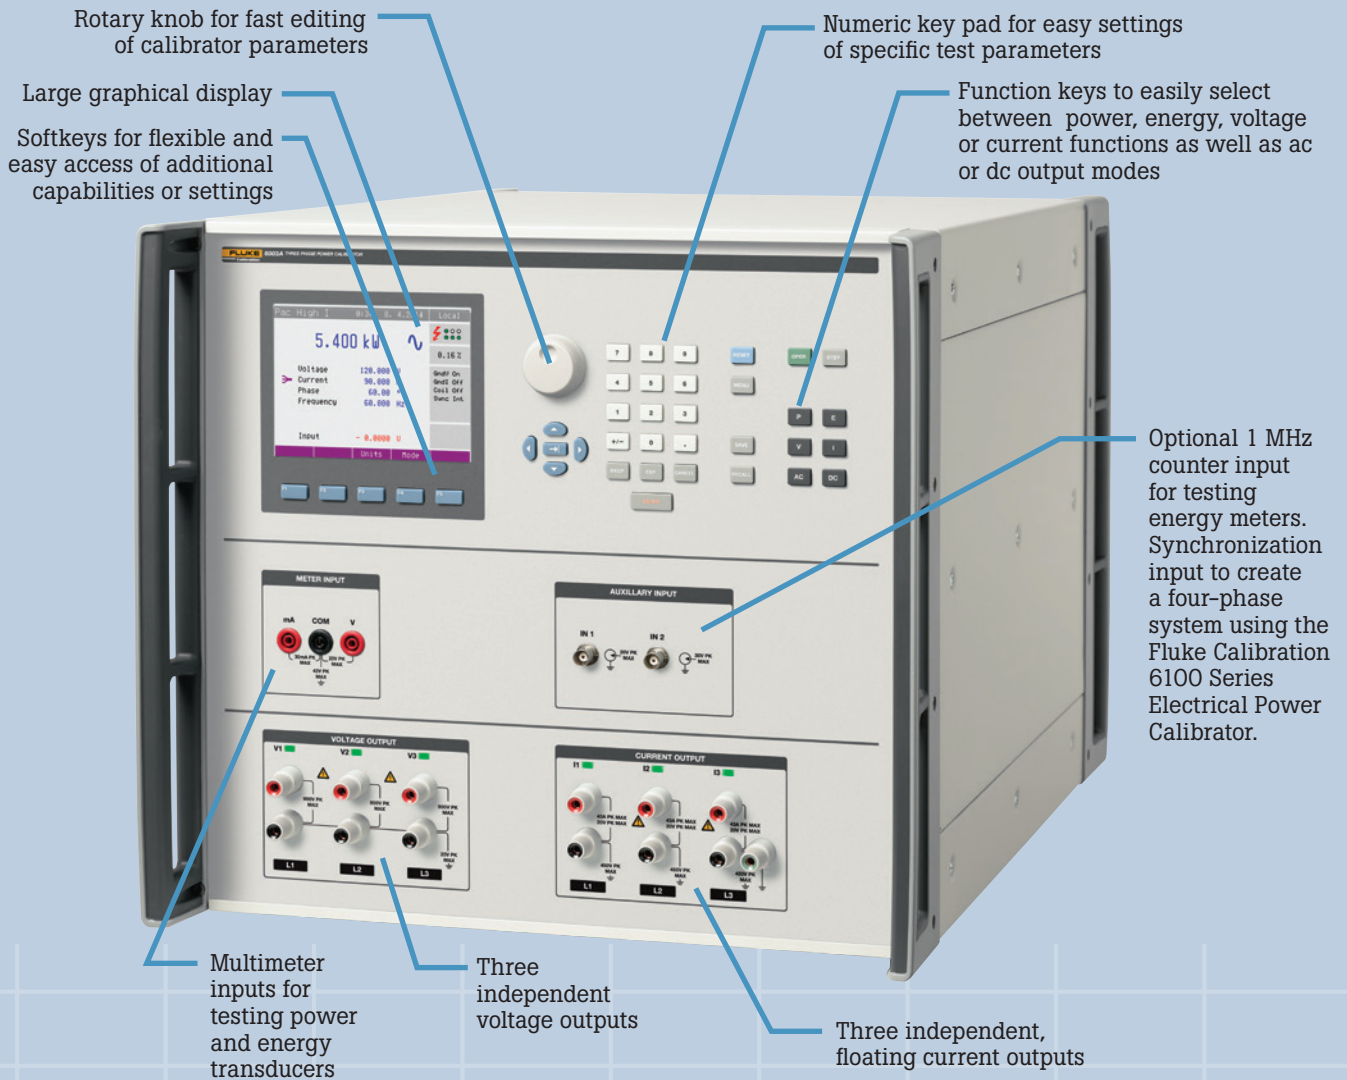

- Three phases in a single instrument
- Cost effective
- Easy to use
- Simulates dc or ac electrical power and energy in voltage range to 600 ac V or 280 dc V and current range to 30 A per phase or 90 A combined
- Phase shift between voltage and current channels can be set from 0° to 359.99°
- Specifications of 375 ppm for power and 0.01° for phase
- Current outputs can be isolated from ground by up to 450 V peak
- Optional energy and power quality capabilities
- Built-in dc multimeter for transducer output measurement
- Offers a high current adapter for applications needing from 30 A to 90 A of current

Versatile and convenient functionality for the manufacturing floor

The 6003A is a single-instrument solution for single or multi-phase sourcing applications, making it ideal for many applications within electronics manufacturing companies and electric utility meter shops.

Now you can efficiently conduct final verification of power transducers, current transformers, energy meters, and revenue meters using true multi-phase testing methods. Test and calibrate single and multi-phase power meters, power quality analyzers and energy meters.

Put the 6003A on a cart and wheel it easily around the factory floor to test workload in situ. The graphical user interface makes setup a snap; all three phases are readily available for verification testing.

Add capabilities with options and accessories

The energy option adds an energy pulse counter and pulse output to the 6003A to calibrate and test energy measurement devices. With this option you can use the 6003A as the energy reference standard. Generated energy is compared with the pulses received from the unit under test (UUT) and a percentage error is reported for the UUT being tested. The generated energy can be expressed as a set amount of time (packet or dose mode), or for a given amount of pulses or time, along with a user determined warm-up period (timer and counter modes). It also has a free run mode for troubleshooting setups. A "Maintain Voltage Signal" feature provides power continuously to the UUT after test sequences, useful when testing energy meters that take power from the voltage source.

The power quality option enables the 6003A to calibrate power quality instrumentation by generating a variety of power output phenomena on any or all of the voltage and current outputs. The types of phenomena includes up to 63 simultaneous harmonics, a single interharmonic, apply modulation (flicker) and impose dips and swells on any or all of the six outputs of the three channels.

The 90 A adapter and high current leads accessory allows you to conveniently generate up to 90 A from a single current phase, which can help you handle your high current workload. You can also use Fluke Calibration coil accessories to support testing of current clamps making measurements up to 4,500 A. The Fluke Calibration 52120A Transconductance Amplifier can provide additional boosted current phases up to 120 A ac per phase. Multiple 52120As can be used to increase current on multiple phases.

Automate to increase throughput and efficiency

Quality standards impose stringent requirements for documenting, reporting, and controlling calibration processes and results. While not directly supported by a MET/CAL Instrument Function Select Code (FSC) or instrument-specific accuracy files, the GPIB

interface permits automated control of the testing process. Users can create their custom programs to do unique and special tests. Using off-the-shelf commercial products, such as MET/CAL® Calibration Management Software, can help you meet these requirements easily while also enabling you to increase throughput and streamline your meter calibration processes.

The MET/CAL application is a powerful tool for creating, editing and testing calibration procedures and collecting and reporting results on a wide variety of instruments. It includes MET/CAL® software—the industry leader for automated calibration and MET/TEAM® software—a flexible system to manage your test and measurement assets. It is the most complete software solution available to calibration professionals.

Priority software support helps you stay productive

MET/SUPPORTSM Gold is an annual membership program offering premium support and services to help you stay as productive as possible with MET/CAL Calibration Management Software. Services include free software updates and upgrades, free access to the MET/CAL Warranted Procedures Library, plus discounts on training and custom procedure development. Members also receive invitations to regular calibration software web seminars and user group meetings. Use only a few of the Gold services and you can easily recover more than the cost of your membership fee.

Metrology training increases skill levels

Calibration and metrology training from Fluke Calibration can help you and your staff become more knowledgeable in a wide variety of disciplines. Instructor-led classroom training is available for general topics in metrology, as well as for calibration software. On-site training can also be scheduled if you have a number of people in your organization who would benefit.

Fluke Calibration also offers other educational events such as web seminars and road shows on a wide variety of topics. The best way to stay informed about these events is to register to receive email and direct mail from Fluke Calibration. You can register online at subscribe to e-news bulletins, web seminar invitations, and more.

Calibration and repair service

Fluke Calibration offers extensive calibration support and service to ensure your long-term satisfaction and return on investment in resistance calibrators, dc calibrators, current calibrators, voltage calibrators, and other calibration equipment. Our worldwide network of calibration centers offers accredited calibrations traceable to national standards. We also offer fast, quality repair and calibration services including a module exchange program and full support in setting up your lab.



Specifications

Summary of standard capabilities

AC Power	0.008 VA to 18 kVA (each channel); 1, 2 or 3 channels
Fundamental AC Frequency Range	15 Hz to 1 k Hz
DC Power	0.008 VA to 18 kVA (1 channel)
AC Voltage	1 to 600 V, 3 channels
DC Voltage	1 to 280 V
AC Current	0.008 to 30 A, 3 channels
DC Current	0.008 to 30 A
High Current	up to 90 A max, dc or ac, 1 channel
Voltage from Current Terminals	DC and sine wave only 1 mV to 5 V AC 15 Hz to 400 Hz

Multimeter Capabilities

- Voltage – DC voltage up to ± 12 V
- Current – DC current up to ± 25 mA
- Frequency – up to 15 kHz


Interfaces: GPIB and USB

Optional Power Quality Functions

- Harmonics (up to 63)
- Interharmonics
- Flicker modulation
- Dips/swell

Optional Electrical Energy

- Pulse input to 1 MHz
- Energy pulse output
- Trigger, synchronization input
- Test duration up to 1000 hours

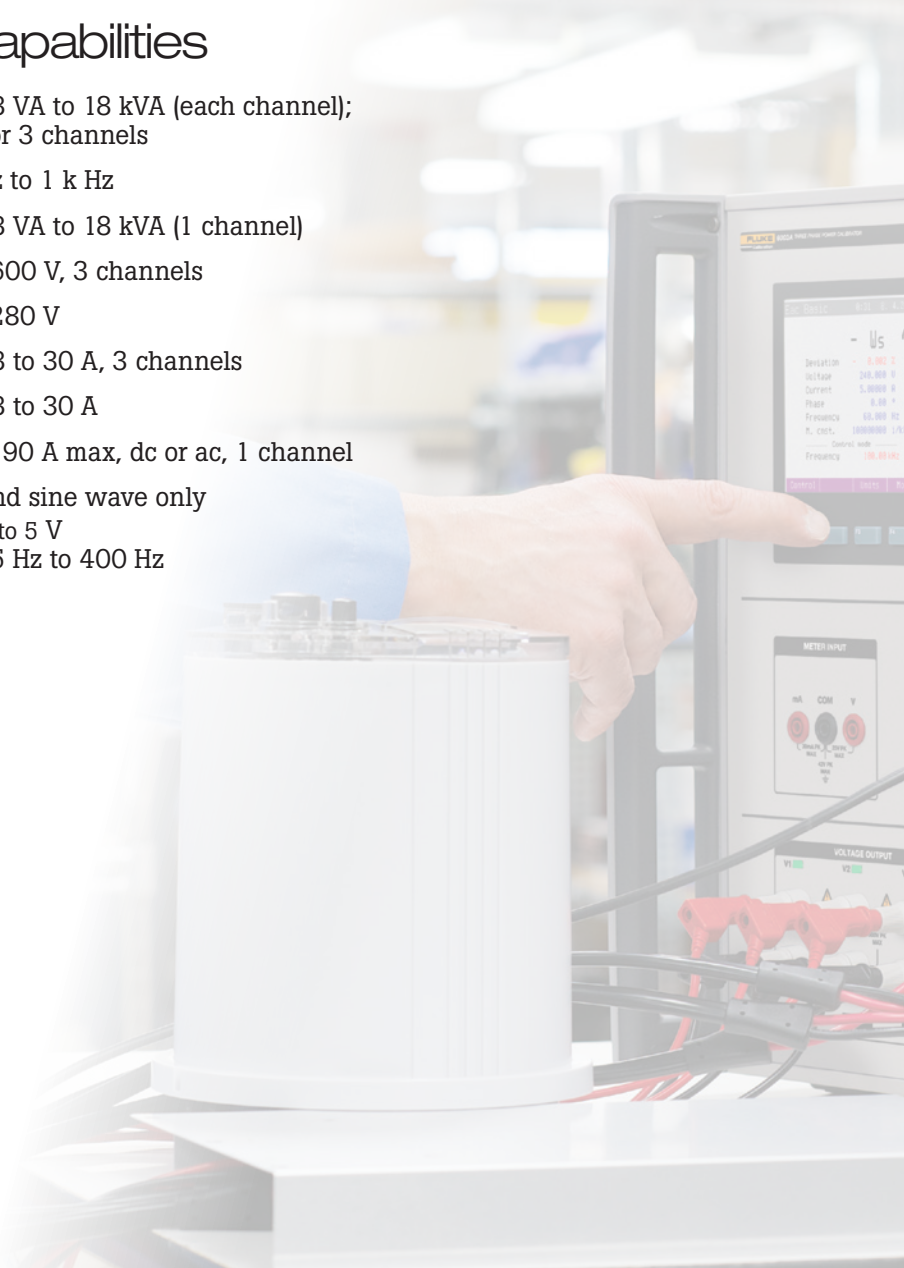


Key Performance Details

Output parameter	Output range	Best 1 year spec	Other
AC voltage per phase	1 V to 600 V	0.012%	300 mA max burden
AC current per phase	0.008 A to 30 A	0.0175%	5.5 V max compliance
Fundamental frequency range	15 Hz to 1 KHz	0.005%	
High current range (dc or ac)	90 mA to 90 A	0.0245%	5 V peak compliance
DC voltage	1 V to 280 V	0.015%	200 mA max burden
DC current	8 mA to 30 A	0.0175%	8 V peak compliance
Voltage from current terminals	1 mV to 5 V	0.05%	15 Hz to 400 Hz
Phase range	0.0 to 359.99°	0.01°	0.01° resolution
Power factor range	-1 to +1 (Lead, Lag)		0.001 resolution
Selected power specifications			
Sinusoidal AC power			
3-phases, PF 1	150 W, 10 V, 5 A, 40-70 Hz	0.037%	
3-phases, PF 0.8	120 W, 10 V, 5 A, 40-70 Hz	0.045%	
3-phases, PF 0.5	75 W, 10 V, 5 A, 40-70 Hz	0.071%	
DC power			
Single phase	50 W, 10 V, 5 A	0.038%	
Multimeter capabilities			
DC voltage	0 V to ±12 V	0.01%	
DC current	0 mA to ±25 mA V	0.01%	
Frequency	1 Hz to 15 kHz	0.005%	


Energy Option

Pulse input	1 MHz max frequency 500 ns min pulse width 5×10 ⁹ max counts
Pulse output	0.02 Hz to 1 MHz
Frequency specification	50 ppm of output
Time range	1 to 1×10 ³ seconds
Time resolution	0.1 seconds
Time interval spec	0.01%
Test duration	1000 hours

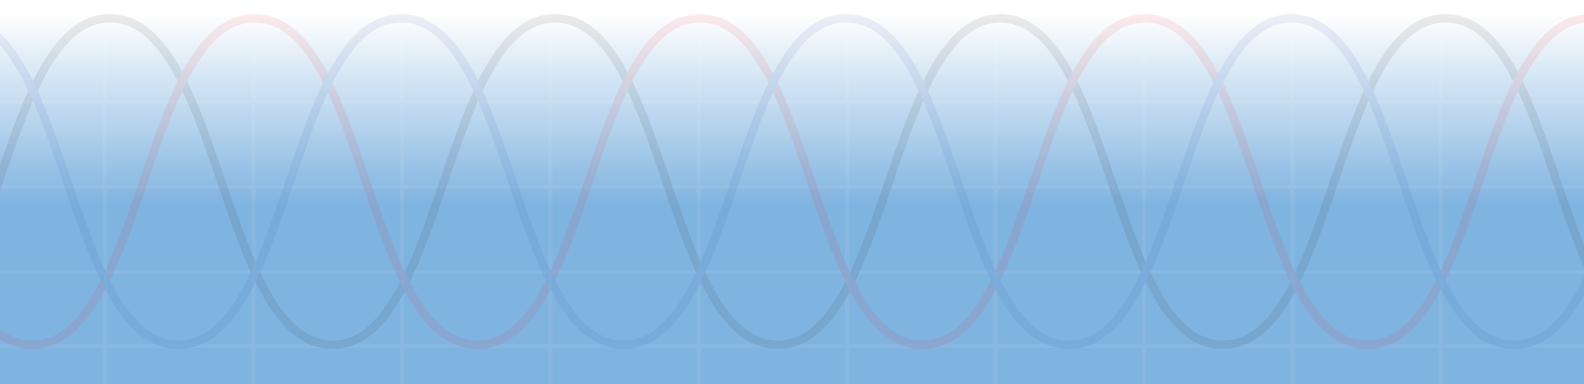

Power Quality Option

Voltage and current modulation (flicker)	
Modulation depth	0 to 30 %
Modulation depth specification	0.2 % of modulation depth
Modulation depth setting resolution	0.001%
Shape of modulation envelope	Rectangular or sinusoidal
Duty cycle for rectangular modulation	1 % to 99 %
Modulating frequency specification	50 ppm of output
Modulation frequency range	0.001 Hz to 50 Hz
RMS amplitude specification	0.2% of range
Fundamental frequency range	15 Hz to 1 kHz
Harmonics and interharmonics	
Applicable outputs	Voltage and/or current, all channels
Fundamental frequency range	15 Hz to 1 k Hz
Amplitude specification	0.2% of range
Harmonic frequency range	30 Hz to 5 kHz
Maximum number of voltage harmonics	63 including the 1st (fundamental frequency), per output, up to 3 outputs
Maximum number of current harmonics	63 including the 1st (fundamental frequency), per output, up to 3 outputs
Interharmonic frequency range	15 Hz to 1 KHz
Number of independent interharmonic products	1 per output, up to 6 outputs
Maximum amplitude of harmonics	30% of RMS output value
Harmonic (2 to 63) phase specification	5 μ s
Dip/swell	
AC voltage range	0.1 to 280 V
AC current range	1 mA to 30 A
Amplitude accuracy	0.2% of range
Frequency range	15 Hz to 1 kHz
Timing	
Trigger to start of dip/swell 0 to 60 s	0 to 60 s
Dip/swell starting transition 0.1 ms to 60 s	0.1 ms to 60 s
Dip/swell time 2 ms to 60 s	2 ms to 60 s
Dip/swell ending transition 0.1 ms to 60 s	0.1 ms to 60 s
Stable time following dip/swell 0 to 60 s	0 to 60 s

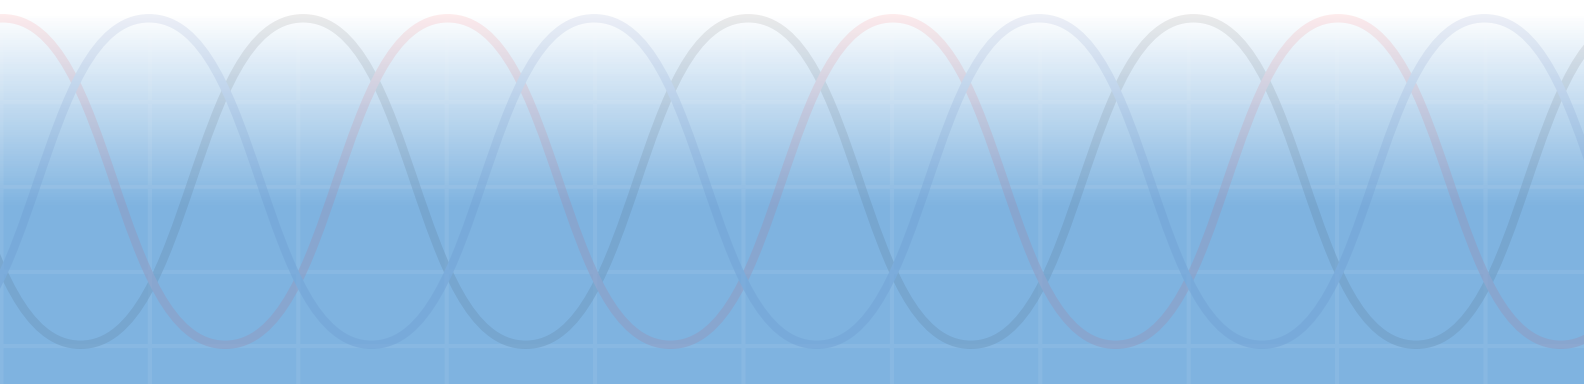

Specifications *cont.*

General specifications

Input Power

Voltage selectable 115 V or
230 V, ± 10%
Frequency..... 47 Hz or 63 Hz
Maximum consumption 1875 VA max

Dimensions

Height..... 415 mm (16.3 inches)
Height (without feet)..... 402 mm (15.8 inches)
Width..... 430 mm (16.9 inches)
Depth..... 640 mm (25.2 inches)
Weight..... 62 kg (136 lb)

Environment

Operating temperature..... 5 °C to 40 °C
Calibration temperature
(Tcal) range 21 °C to 25 °C
Storage temperature..... -10 °C to 55 °C
Transit temperature..... -15 °C to 60 °C
Warm up time 1 hour
Safe operation max. relative
humidity (non-condensing) <80 %, 5 °C to 31 °C
ramping linearly down to
50 % at 35 °C
Operating altitude..... 2,000 m maximum
Storage altitude 12,000 m maximum
Shock..... MIL-RRF-28800F class 3
Vibration..... MIL-RRF-28800F class 3
Enclosure..... MIL-RRF-28800F class 3

Ordering information

Models

6003A 6003A 3 Phase Power Calibrator
6003A/E..... 6003A 3 Phase Power Calibrator,
energy option
6003A/PQ 6003A 3 Phase Power Calibrator,
PQ option
6003A/PQE 6003A 3 Phase Power Calibrator,
PQ option, energy option

Software

MET/CAL Software Automation solution for DC/LF and
RF calibration
MET/TEAM Software Calibration asset management
software and modules
Software Services..... Installation, customization, and
training services

Options and accessories

6003A-90A..... 90 A adapter and
high current cables
52120A/COIL3KA..... Coil, 25 turn, 3000 A
52120A/COIL6KA..... Coil, 50 turn, 6000 A
5500A/COIL Coil, 50 turn, 1000 A

Fluke Calibration. *Precision, performance, confidence.™*

Electrical	RF	Temperature	Humidity	Pressure	Flow	Software
------------	----	-------------	----------	----------	------	----------

Fluke Calibration
PO Box 9090, Everett, WA 98206 U.S.A.

Fluke Europe B.V.
PO Box 1186, 5602 BD
Eindhoven, The Netherlands

For more information call:
In the U.S.A. (877) 355-3225 or
Fax (425) 446-5116
In Europe/M-East/Africa +31 (0) 40
2675 200 or Fax +31 (0) 40 2675 222
In Canada (800)-36-FLUKE or
Fax (905) 890-6866

From other countries +1 (425) 446-5500 or
Fax +1 (425) 446-5116
Web access: <http://www.flukecal.com>

©2014, 2019 Fluke Calibration.
Specifications subject to change without notice.
Printed in U.S.A. 9/2019 6002244b-en
Pub-ID: 13172-eng