



Optical Multimeter Expansion frame AQ2141

Expands the AQ2140 optical multimeter to support up to 16 channels externally (requires four units).



General

This Frame expands the AQ2140 optical multimeter to support external units. It can mount up to four channels for the AQ2140 optical multimeter, including sensor units, OPM units or light source units.


Features

- A single AQ2140 optical multimeter can be connected to up to four AQ2141 optical multimeter expansion frames, providing an increase of up to 16 external channels.
- The AQ2141 can also be used as a multi-channel light source by itself (Does not support ATT function or 1 kHz or 2 kHz chopped light).

Application Example


● Loss measurement for an 8-core tape fiber

The AQ2140 optical multimeter is connected to two AQ2141 optical multimeter expansion frames to provide it with four light source channels each, for a total of eight channels.

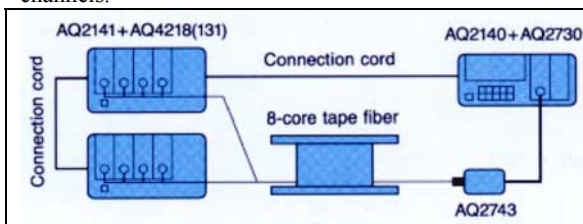

● Branching ratio for 16-core coupler

Four AQ2141 optical multimeter expansion units are connected to the AQ2140 optical multimeter. Each is mounted with four sensor unit channels, providing a total of 16 channels.

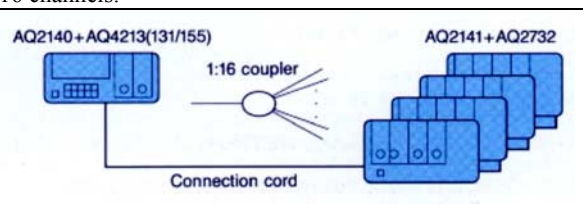

AQ2141 optical Multimeter Expansion Frame

Specifications

No. of units	Max. 4 channels		
No. of channels	Max 16 (four AQ2141 ❶ units connected to one AQ2140)		
Supported units ❷	Sensors ❸		Light sources
	Sensor units	OPM units	Light source units ❹
Manual operation ❺	All units use common settings (λ , AVG, DREF) ❻		Individual unit settings
GP-IB operation ❼	Individual unit setting supported		
Interface	Dedicated serial interface		
Power Supply	AC 100 to 240 V, 48 to 63 Hz, approx. 60 VA		
Environmental conditions	Operating temperature; 0 to 50°C, Storage temperature; -25 to 70°C, Humidity; 85% or less		
Dimensions and mass	Approx. 212(W) × 133(H) × 350(D) mm Approx. 3.5kg		
Accessories	Power cord: 1, Connection code: 1, Instruction manual: 1		

Notes:

❶ Older AQ2140 models may require a factory update to software.
 ❷ Optical return loss measurement units are supported.
 ❸ Sensor and OPM (sensor) units should all be of the same type. Older sensor and OPM units may require factory updates to software. Please consult the manufacturer or your vendor for information on software versions.

❹ Light sources may be freely mixed.

❺ Sensor and OPM units mounted in the AQ2141 may be used via connection to the AQ2140.

❻ Individual unit keys (CW/CHOP, ZERO) may be set for each unit.

❼ Requires usage with AQ2140.

Supported units

Either of matched sensor type or light source type should be used in mounted unit.

And the mount of same sensor units or same sensors realizes correct operation. Light source units may be freely mixed.

Application	Product name	Model	Notes
Sensors	Sensor unit	AQ2731	Requires AQ9335(*) connector adapter (option)
		AQ2732/2733/2734/2735	AQ9389B connector adapter (FC) included
	OPM unit+ sensor	AQ2730 + AQ2741	Can also be used with AQ9335(*) connector adapter (option)
		AQ2730 + AQ2742	
AQ2730 + AQ2743			
Light sources	LED unit	AQ4215(085)/4215(131)/4215(155)	Requires AQ9433(*) connector adapter (option)
		AQ4218(13)/4218(155)	
	EE-LED unit	AQ4221(131)/4221(155)	Requires AQ9434(*) universal adapter (option)
	LD unit	AQ4211(131)/4211(155)/4211(165)	
		AQ4212(130)	
	DFB-LD unit	AQ4213(131/155)	
		AQ4214(131)/4214(155)	Requires fiber cord with SC/APC connector

Note: * indicates connector type, which may be FC, SC, ST, DIN or HMS-10/A.

Specifications are subject to change without notice.

ANDO CORPORATION - M.I.D. <http://www.andocorp.com>

HEADQUARTERS: 2021 N. Capital Avenue, San Jose, CA 95132, U.S.A. Phone:+1(408)941-0100 Fax:+1 (408)941-0103

EAST OFFICE: 7617 Standish Place, Rockville, MD 20855, U.S.A. Phone:+1 (301)294-3365 Fax:+1 (301)294-3359

ANDO EUROPE B.V. <http://www.ando.nl/>

HEADQUARTERS: "Vijverdam", Dalsteindreef 57, 1112XC Diemen, The Netherlands Phone:+31(0)20-698-1441 Fax:+31(0)20-699-8938

NIEDERLASSUNG DEUTSCHLAND: Dachauer StraBe 119 B, D-80993 Munchen, Germany Phone:+49(0)89-143-8150 Fax:+49(0)89-1438-1555

ANDO ELECTRIC SINGAPORE PTE.LTD.

19 Kim Keat Road #05-03, Jumbo Industrial Building, Singapore 328804 Phone:+65 251-1391 Fax:+65 251-1987

ANDO ELECTRIC INC.

5F-2, No 81, Pei-Ta Road, Hsin-chu City, Taiwan Phone:+886 35 28 4168 Fax:+886 35 28 4110

Please visit our website for more information: <http://www.ando.com/>