

Version
07.00

December
2007

Vector Network Analyzer R&S®ZVB

Data sheet



ROHDE & SCHWARZ


MEASUREMENT RANGE	3
MEASUREMENT SPEED	5
MEASUREMENT ACCURACY	6
EFFECTIVE SYSTEM DATA	9
TEST PORT OUTPUT	10
TEST PORT INPUT	13
ADDITIONAL FRONT PANEL CONNECTORS	14
DISPLAY	14
REAR PANEL CONNECTORS	14
OPTIONS	16
GENERAL DATA	17
ORDERING INFORMATION	18

Specifications apply under the following conditions:


90 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and all internal adjustments performed. Data designated „overrange“ and data without tolerances: typical values only. Unless stated otherwise, specifications apply to test ports and a nominal source power of -10 dBm.

Measurement range


Impedance		50 Ω
Test port connector	R&S [®] ZVB4 and R&S [®] ZVB8	type N, female
	R&S [®] ZVB14 and R&S [®] ZVB20	3.5 mm, male
Number of test ports		2 or 4
Frequency range	R&S [®] ZVB4	300 kHz to 4 GHz
	R&S [®] ZVB8	300 kHz to 8 GHz
	R&S [®] ZVB14	10 MHz to 14 GHz
	R&S [®] ZVB20	10 MHz to 20 GHz
Static frequency accuracy	without optional oven quartz	8×10^{-6}
	with optional oven quartz	1×10^{-7}
Frequency resolution		1 Hz
Number of measurement points	per trace	2 to 20001
Measurement bandwidths	1/2/5 steps	1 Hz to 500 kHz
Dynamic range of the R&S [®] ZVB4 two-port model and the R&S [®] ZVB8 two-port model (without optional step attenuators)	from PORT 1 to PORT 2	
	300 kHz to 5 MHz	>80 dB, typ. 100 dB
	5 MHz to 100 MHz	>100 dB, typ. 120 dB
	100 MHz to 4 GHz	>120 dB, typ. 130 dB
	4 GHz to 7 GHz (R&S [®] ZVB8 only)	>117 dB, typ. 127 dB
	7 GHz to 7.5 GHz (R&S [®] ZVB8 only)	>115 dB, typ. 120 dB
Dynamic range of the R&S [®] ZVB4 four-port model and the R&S [®] ZVB8 four-port model (without optional step attenuators)	from PORT 1 to PORT 2 and from PORT 3 to PORT 4 (for four-port models only)	
	300 kHz to 5 MHz	>80 dB, typ. 100 dB
	5 MHz to 100 MHz	>100 dB, typ. 120 dB
	100 MHz to 500 MHz	>120 dB, typ. 130 dB
	500 MHz to 4 GHz	>123 dB, typ. 130 dB
	4 GHz to 7 GHz (R&S [®] ZVB8 only)	>120 dB, typ. 130 dB
	7 GHz to 7.5 GHz (R&S [®] ZVB8 only)	>115 dB, typ. 125 dB
7.5 GHz to 8 GHz (R&S [®] ZVB8 only)	>108 dB, typ. 125 dB	
Dynamic range of the R&S [®] ZVB14	from PORT 1 to PORT 2 and from PORT 3 to PORT 4 (for four-port model only)	
	10 MHz to 100 MHz	>80 dB, typ. 110 dB
	100 MHz to 700 MHz	>100 dB, typ. 130 dB
	700 MHz to 8 GHz	>120 dB, typ. 133 dB
Dynamic range of the R&S [®] ZVB20	from PORT 1 to PORT 2 and from PORT 3 to PORT 4 (for four-port model only)	
	10 MHz to 100 MHz	>80 dB, typ. 110 dB
	100 MHz to 700 MHz	>100 dB, typ. 130 dB
	700 MHz to 8 GHz	>120 dB, typ. 133 dB
Dynamic range of the R&S [®] ZVB20	from PORT 1 to PORT 2 and from PORT 3 to PORT 4 (for four-port model only)	
	10 MHz to 100 MHz	>80 dB, typ. 110 dB
	100 MHz to 700 MHz	>100 dB, typ. 130 dB
	700 MHz to 8 GHz	>120 dB, typ. 133 dB
Dynamic range of the R&S [®] ZVB20	from PORT 1 to PORT 2 and from PORT 3 to PORT 4 (for four-port model only)	
	10 MHz to 100 MHz	>80 dB, typ. 110 dB
	100 MHz to 700 MHz	>100 dB, typ. 130 dB
	700 MHz to 8 GHz	>120 dB, typ. 133 dB
The dynamic range is defined as the difference between the actually available maximum source power and the rms value of the data trace of the transmission magnitude, which is produced by noise and crosstalk with the test ports short-circuited. The specification applies at 10 Hz measurement bandwidth and without system error correction. The dynamic range can be increased by using a measurement bandwidth of 1 Hz.		

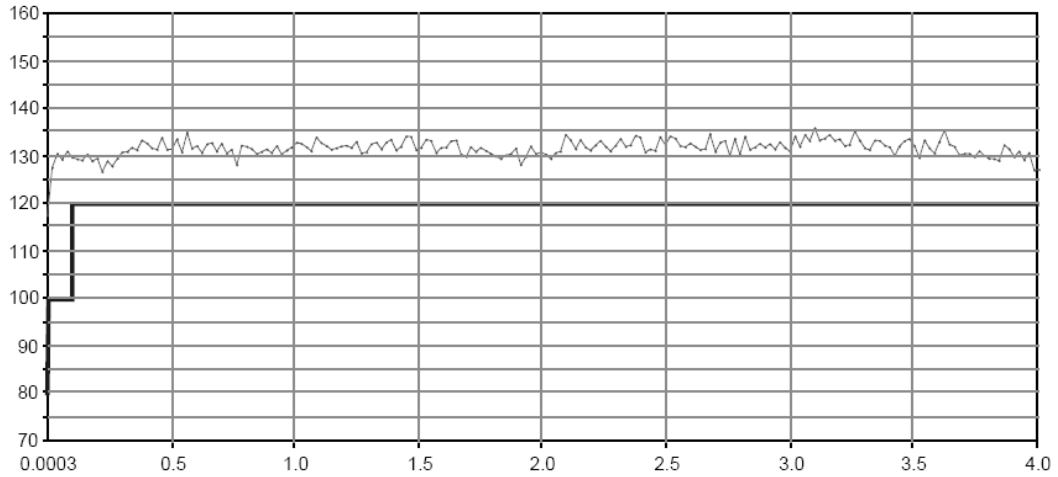

Dynamic range in dB versus frequency in GHz of the R&S®ZVB4

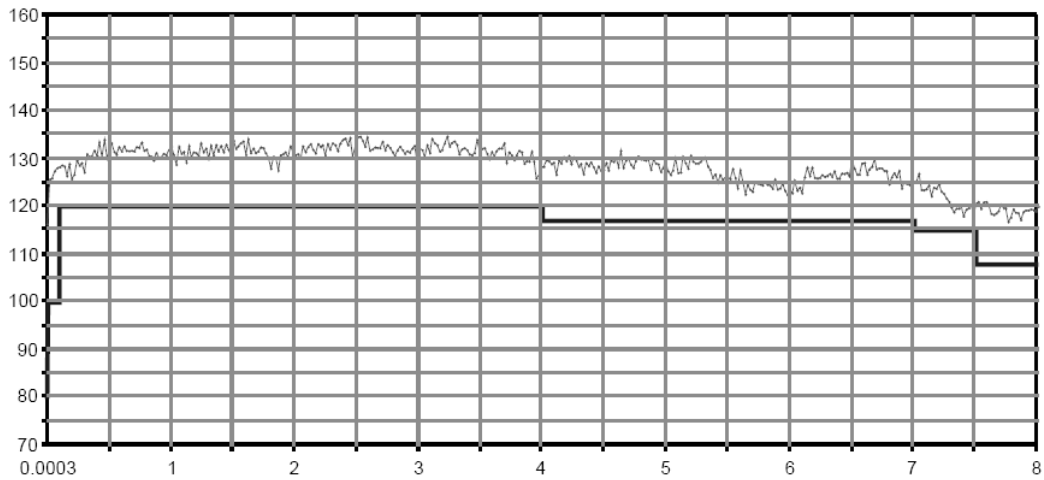

Dynamic range in dB versus frequency in GHz of the R&S®ZVB8

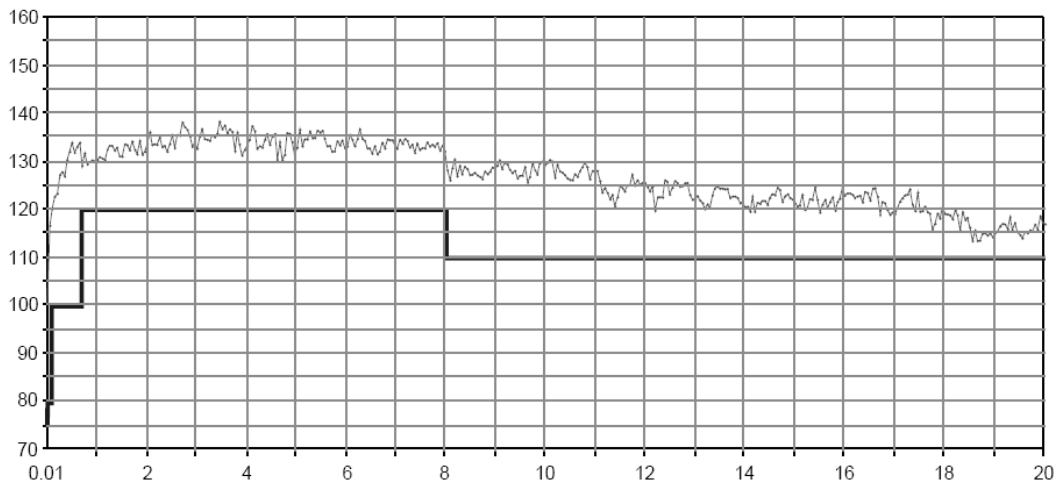

Dynamic range in dB versus frequency in GHz of the R&S®ZVB14 (up to 14 GHz) and the R&S®ZVB20

Measurement speed

Measurement time	for 201 measurements points, with span 100 MHz, 500 kHz measurement bandwidth, ALC and display switched off	
	with center frequency 1.1 GHz	<6 ms
	with center frequency 5.1 GHz	<4.5 ms
Measurement time per point	500 kHz measurement bandwidth, CW mode	<4.5 μ s
Data transfer time	for 201 measurements points	
	via IEC/IEEE bus	<2.9 ms
	via VX11 over 100 Mbit/s LAN	<1.3 ms
	via RSIB over 100 Mbit/s LAN	<0.7 ms
Time for measurement and data transfer	for 201 measurements points, with start frequency 1 GHz, stop frequency 1.1 GHz, 500 kHz measurement bandwidth, and display switched off (No additional time for data transfer is needed, as this occurs simultaneously during the measurement.)	<6 ms
Switching time between channels	with no more than 2001 points	<1 ms
Switching time between two preloaded instrument settings	with no more than 2001 points	<10 ms



Typical sweep times versus number of measurement points

Number of measurement points	51	101	201	401	801	1601
Start frequency 5 GHz, stop frequency 5.2 GHz, ALC off, and a measurement bandwidth of 100 kHz						
With full one-port calibration or with correction switched off	2.4 ms	3.9 ms	6.3 ms	11 ms	20.4 ms	40.2 ms
With TOSM calibration	4.7 ms	8.6 ms	16.4 ms	32.4 ms	65 ms	170 ms
Start frequency 6 GHz, stop frequency 8 GHz, ALC off, and a measurement bandwidth of 100 kHz						
With full one-port calibration or with correction switched off	3.4 ms	6.2 ms	11 ms	17.3 ms	28.2 ms	49 ms
With TOSM calibration	5.3 ms	9.8 ms	18 ms	33 ms	63 ms	160 ms
Start frequency 10 MHz, stop frequency 4 GHz (R&S®ZVB4), 8 GHz (R&S®ZVB8), 14 GHz (R&S®ZVB14), or 20 GHz (R&S®ZVB20), ALC off, and a measurement bandwidth of 100 kHz						
With full one-port calibration or with correction switched off	8.4 ms	12.6 ms	19.5 ms	30.5 ms	53.2 ms	88.2 ms
With TOSM calibration	10.3 ms	16.6 ms	28 ms	47 ms	81 ms	190 ms



Measurement accuracy

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 K after calibration. Validity of the data is conditional on the use of a suitable calibration kit. This calibration kit is used to achieve the effective system data specified below. Frequency points, measurement bandwidth, and sweep time have to be identical for measurement and calibration (no interpolation allowed).



Accuracy of transmission measurements		
R&S®ZVB4 and R&S®ZVB8		
300 kHz to 1 MHz	+15 dB to -45 dB	<1 dB or <6°
1 MHz to 50 MHz	+15 dB to -30 dB	<0.2 dB or <2°
	-30 dB to -45 dB	<1 dB or <6°
Above 50 MHz	+15 dB to +5 dB	<0.2 dB or <2°
	+5 dB to -55 dB	<0.1 dB or <1°
	-55 dB to -70 dB	<0.2 dB or <2°
	-70 dB to -85 dB	<1 dB or <6°
R&S®ZVB14 and R&S®ZVB20		
10 MHz to 50 MHz	+15 dB to -30 dB	<1 dB or <6°
50 MHz to 400 MHz	+15 dB to -30 dB	<0.2 dB or <2°
	-30 dB to -45 dB	<1 dB or <6°
400 MHz to 700 MHz	+15 dB to +5 dB	<0.2 dB or <2°
	+5 dB to -35 dB	<0.1 dB or <1°
	-35 dB to -50 dB	<0.2 dB or <2°
	-50 dB to -65 dB	<1 dB or <6°
700 MHz to 8 GHz	+15 dB to +5 dB	<0.2 dB or <2°
	+5 dB to -55 dB	<0.1 dB or <1°
	-55 dB to -70 dB	<0.2 dB or <2°
	-70 dB to -85 dB	<1 dB or <6°
Above 8 GHz	+15 dB to +5 dB	<0.2 dB or <2°
	+5 dB to -35 dB	<0.1 dB or <1°
	-35 dB to -50 dB	<0.2 dB or <2°
	-50 dB to -65 dB	<1 dB or <6°
Specifications are based on a matched DUT, a measurement bandwidth of 10 Hz, and a nominal source power of -10 dBm.		

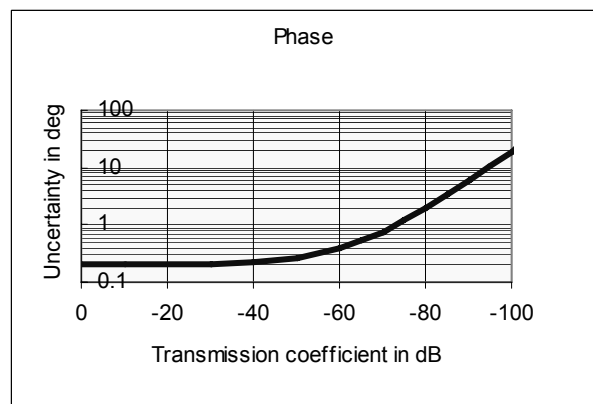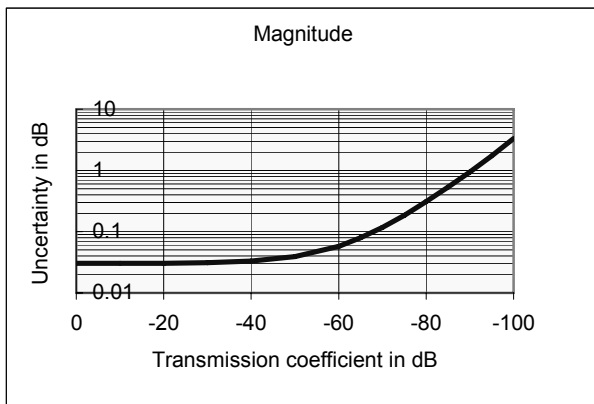



Typical accuracy of transmission magnitude and transmission phase measurements of the R&S®ZVB4 and the R&S®ZVB8 in the frequency range from 300 kHz to 4 GHz

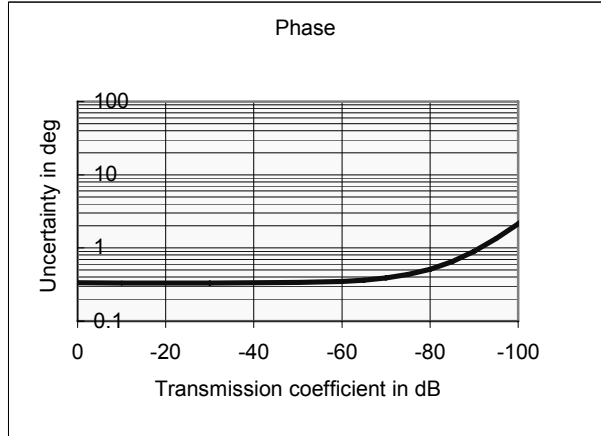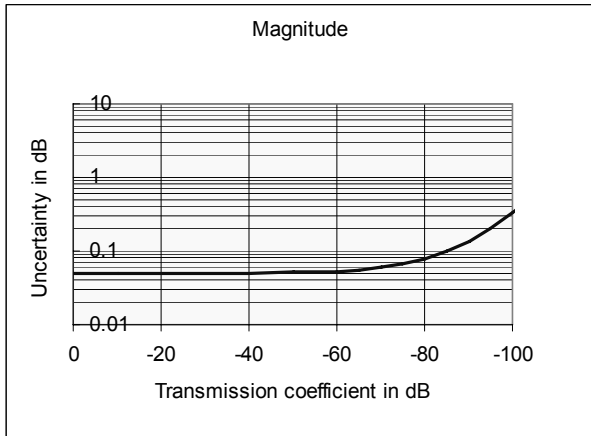

Typical accuracy of transmission magnitude and transmission phase measurements of the R&S®ZVB8 in the frequency range from 4 GHz to 8 GHz

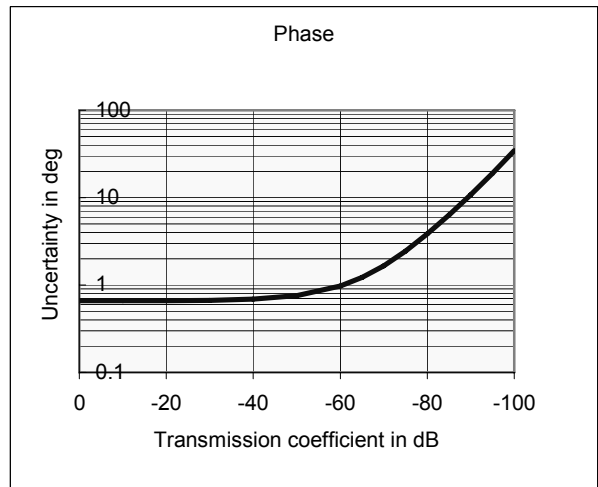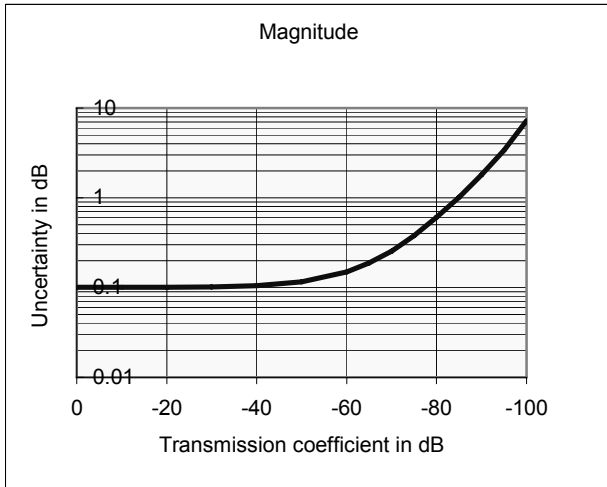

Typical accuracy of transmission magnitude and transmission phase measurements of the R&S®ZVB14 and the R&S®ZVB20 in the frequency range from 10 MHz to 700 MHz

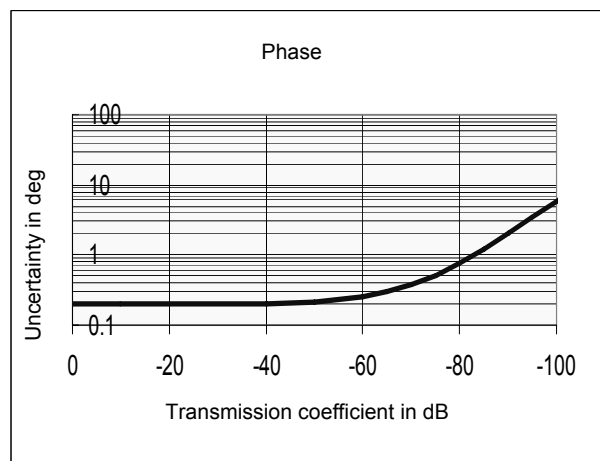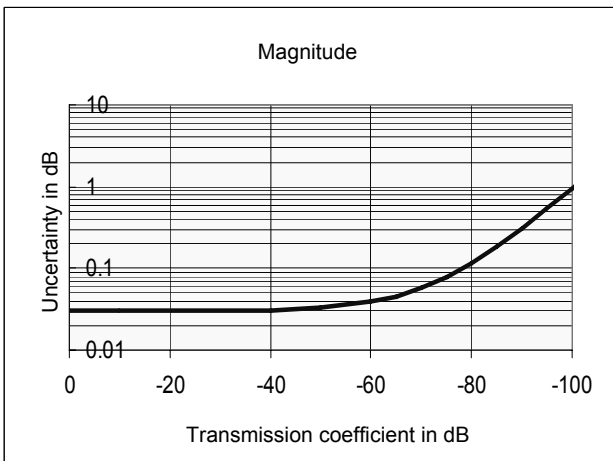

Typical accuracy of transmission magnitude and transmission phase measurements of the R&S®ZVB14 (in the frequency range from 700 MHz to 14 GHz) and the R&S®ZVB20 (in the frequency range from 700 MHz to 20 GHz)

Accuracy of reflection measurements



R&S®ZVB4 and R&S®ZVB8

Above 300 kHz	+10 dB to +3 dB	<0.6 dB or <4°
	+3 dB to -15 dB	<0.4 dB or <3°
	-15 dB to -25 dB	<1 dB or <6°
	-25 dB to -35 dB	<3 dB or <20°

R&S®ZVB14 and R&S®ZVB20

10 MHz to 50 MHz	+3 dB to -15 dB	<1 dB or <6°
	-15 dB to -25 dB	<3 dB or <20°
Above 50 MHz	+10 dB to +3 dB	<0.6 dB or <4°
	+3 dB to -15 dB	<0.4 dB or <3°
	-15 dB to -25 dB	<1 dB or <6°
	-25 dB to -35 dB	<3 dB or <20°

Specifications are based on an isolating DUT, a measurement bandwidth of 10 Hz, and a nominal source power of -10 dBm.

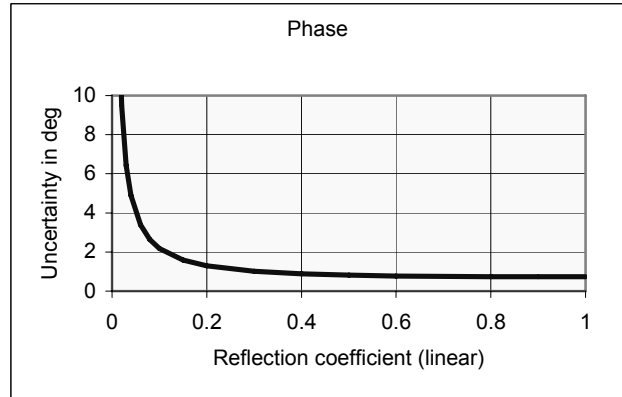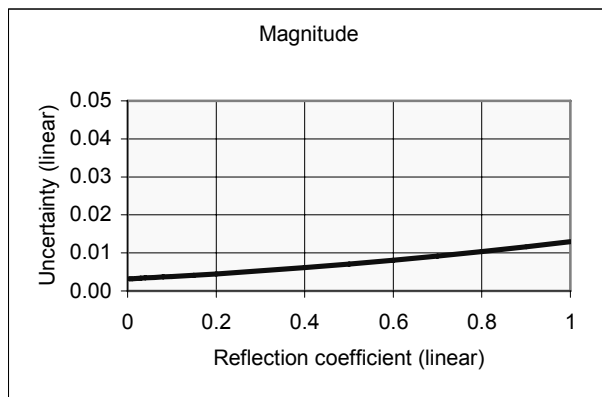

Typical accuracy of reflection magnitude and reflection phase measurements of the R&S®ZVB4 in the frequency range from 300 kHz to 4 GHz, of the R&S®ZVB8 in the frequency range from 300 kHz to 8 GHz, of the R&S®ZVB14 in the frequency range from 50 MHz to 14 GHz, and of the R&S®ZVB20 in the frequency range from 50 MHz to 20 GHz

Trace stability

Trace noise of S11 (rms)	at 0 dBm source power, 0 dB reflection, and 1 kHz measurement bandwidth	
	R&S®ZVB4 and R&S®ZVB8	
	above 300 kHz	<0.004 dB, typ. 0.001 dB
	R&S®ZVB14 and R&S®ZVB20	
	700 MHz to 8 GHz	<0.004 dB, typ. 0.001 dB
	above 8 GHz	<0.015 dB, typ. 0.004 dB
Temperature dependence	at 0 dB transmission or reflection	
		<0.05 dB/K or <0.4°/K


Effective system data

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 K after calibration. The data is based on a measurement bandwidth of 10 Hz and system error calibration by means of a suitable calibration kit. Frequency points, measurement bandwidth, and sweep time have to be identical for measurement and calibration (no interpolation allowed).


R&S®ZVB4 and R&S®ZVB8		
Directivity	300 kHz to 4 GHz	>46 dB, typ. 50 dB
	4 GHz to 8 GHz (R&S®ZVB8 only)	>40 dB, typ. 50 dB
Source match	300 kHz to 4 GHz	>40 dB, typ. 46 dB
	4 GHz to 8 GHz (R&S®ZVB8 only)	>36 dB, typ. 40 dB
Reflection tracking	300 kHz to 4 GHz	<0.04 dB, typ. 0.01 dB
	4 GHz to 8 GHz (R&S®ZVB8 only)	<0.1 dB, typ. 0.01 dB
Load match	300 kHz to 4 GHz	>46 dB, typ. 50 dB
	4 GHz to 8 GHz (R&S®ZVB8 only)	>40 dB, typ. 46 dB
Transmission tracking	300 kHz to 4 GHz	<0.06 dB, typ. 0.01 dB
	4 GHz to 8 GHz (R&S®ZVB8 only)	<0.1 dB, typ. 0.05 dB
R&S®ZVB14 and R&S®ZVB20		
Directivity	10 MHz to 700 MHz	>36 dB, typ. 40 dB
	above 700 MHz	>40 dB, typ. 50 dB
Source match	10 MHz to 700 MHz	>30 dB, typ. 48 dB
	above 700 MHz	>30 dB, typ. 48 dB
Reflection tracking	10 MHz to 700 MHz	<0.3 dB, typ. 0.05 dB
	above 700 MHz	<0.3 dB, typ. 0.05 dB
Load match	10 MHz to 700 MHz	>36 dB, typ. 40 dB
	above 700 MHz	>40 dB, typ. 50 dB
Transmission tracking	10 MHz to 700 MHz	<0.2 dB, typ. 0.1 dB
	above 700 MHz	<0.1 dB, typ. 0.05 dB

Test port output


Power range (without optional step attenuators)	R&S®ZVB4 and R&S®ZVB8	
	300 kHz to 50 MHz	–40 dBm to +10 dBm, typ. –45 dBm to +14 dBm
	50 MHz to 4 GHz	–40 dBm to +13 dBm, typ. –45 dBm to +15 dBm
	4 GHz to 7 GHz (R&S®ZVB8 only)	–40 dBm to +10 dBm, typ. –45 dBm to +13 dBm
	7 GHz to 8 GHz (R&S®ZVB8 only)	–40 dBm to +8 dBm, typ. –45 dBm to +12 dBm
	R&S®ZVB14 and R&S®ZVB20	
	10 MHz to 13 GHz	–30 dBm to +10 dBm, typ. –40 dBm to +15 dBm
	above 13 GHz	–30 dBm to +5 dBm, typ. –40 dBm to +10 dBm
Power accuracy (with ALC on and without power calibration)	R&S®ZVB4 and R&S®ZVB8	
	at –10 dBm	<2 dB
	in temperature range +18 °C to +28 °C	
	above 50 MHz	<0.8 dB, typ. 0.3 dB
	R&S®ZVB14 and R&S®ZVB20	
	at –10 dBm	<3 dB
	in temperature range +18 °C to +28 °C	
	above 50 MHz	<0.8 dB, typ. 0.3 dB
Power linearity	referenced to –10 dBm	<2 dB
	in temperature range +18 °C to +28 °C	
	R&S®ZVB4 and R&S®ZVB8	
	above 50 MHz	<0.8 dB, typ. 0.2 dB
	R&S®ZVB14 and R&S®ZVB20	
	above 500 MHz	<0.8 dB, typ. 0.2 dB
Power resolution		0.01 dB
Harmonics (output power referenced to maximum specified output power)	R&S®ZVB4 and R&S®ZVB8	
	300 kHz to 50 MHz at –3 dB	typ. <–30 dBc
	50 MHz to 4 GHz at –5 dB	<–20 dBc, typ. <–30 dBc
	4 GHz to 7 GHz at –2 dB (R&S®ZVB8)	<–20 dBc, typ. <–30 dBc
	7 GHz to 8 GHz at 0 dB (R&S®ZVB8)	<–20 dBc, typ. <–30 dBc
	R&S®ZVB14 and R&S®ZVB20	
	10 MHz to 50 MHz at –3 dB	typ. <–30 dBc
	50 MHz to 13 GHz at 0 dB	<–20 dBc, typ. <–30 dBc
	above 13 GHz at 0 dB	<–20 dBc, typ. <–30 dBc

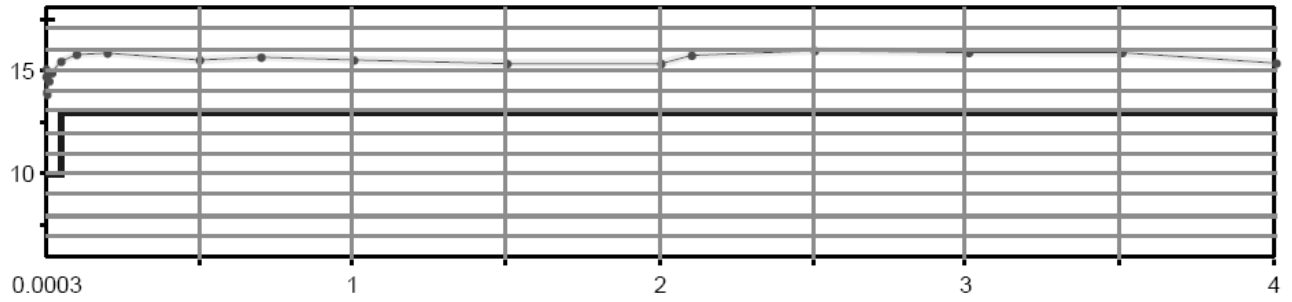


Maximum output power in dBm versus frequency in GHz of the R&S ZVB4

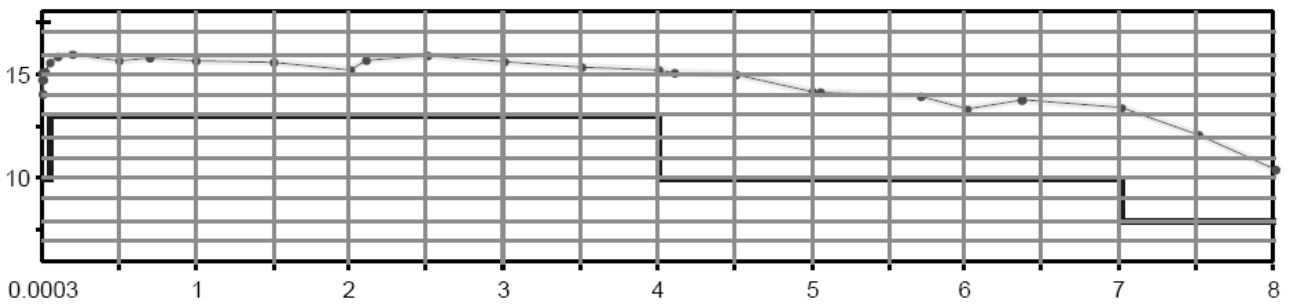


Maximum output power in dBm versus frequency in GHz of the R&S ZVB8

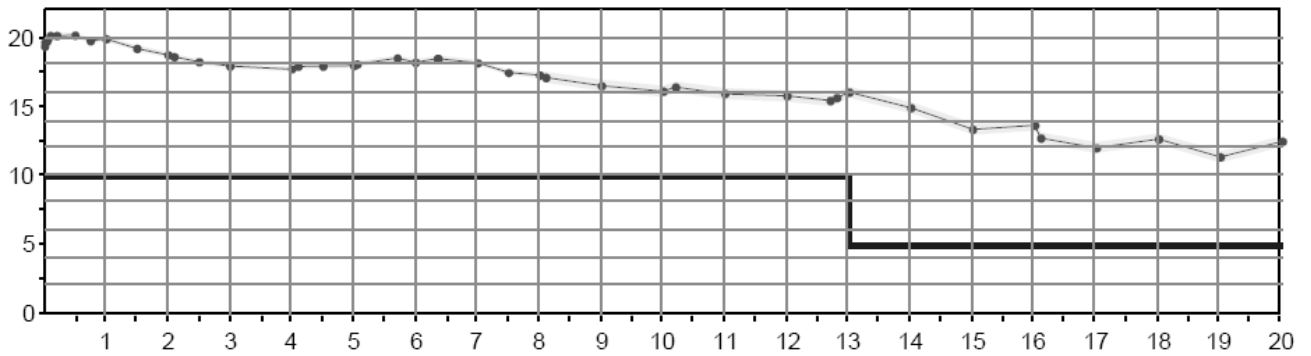


Maximum output power in dBm versus frequency in GHz of the R&S ZVB14 (up to 14 GHz) and the R&S ZVB20

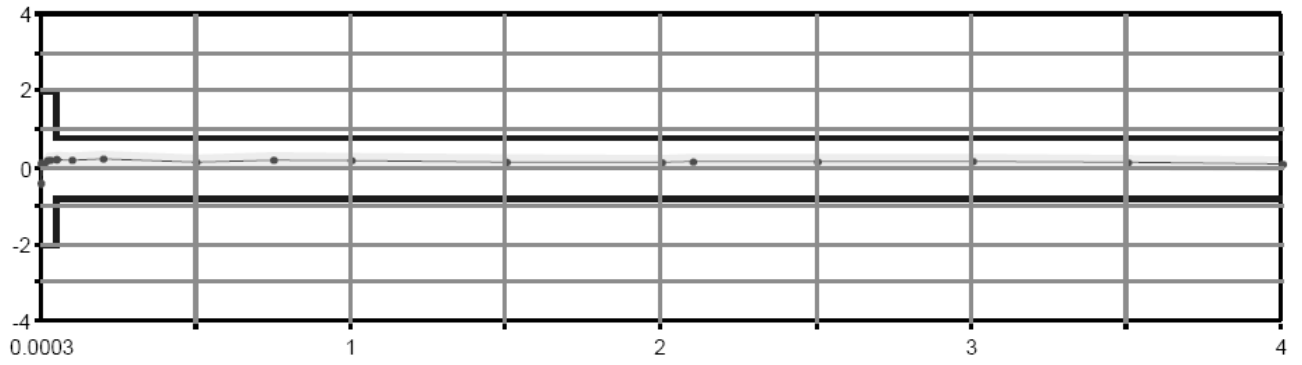

Output power accuracy in dB versus frequency in GHz of the R&S®ZVB4

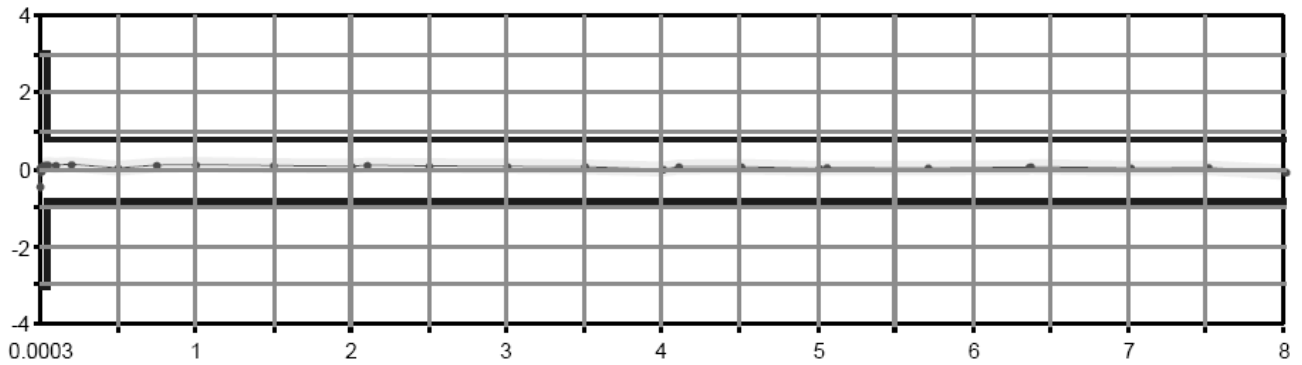

Output power accuracy in dB versus frequency in GHz of the R&S®ZVB8

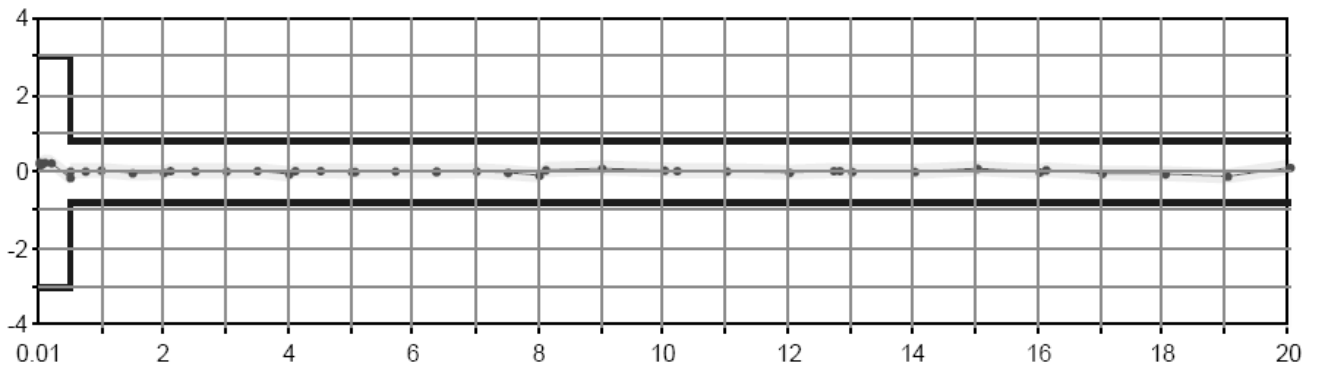

Output power accuracy in dB versus frequency in GHz of the R&S®ZVB14 (up to 14 GHz) and the R&S®ZVB20

Test port input

Match	without system error correction	
	R&S®ZVB4	
	300 kHz to 4 GHz	>16 dB
	R&S®ZVB8	
	300 kHz to 7 GHz	>16 dB
	7 GHz to 8 GHz	>14 dB
	R&S®ZVB14 and R&S®ZVB20	
	10 MHz to 50 MHz	>10 dB
	50 MHz to 2 GHz	>12 dB
above 2 GHz	>8 dB	
Maximum nominal input level	R&S®ZVB4 and R&S®ZVB8	+13 dBm
	R&S®ZVB14 and R&S®ZVB20	
	10 MHz to 8 GHz	+10 dBm
	above 8 GHz	0 dBm
Power measurement accuracy	at -10 dBm without power calibration in temperature range +18 °C to +28 °C	
	10 MHz to 8 GHz	<1 dB
	above 8 GHz (R&S®ZVB14 and R&S®ZVB20 only)	<2 dB
Receiver linearity	referenced to -10 dBm in temperature range +18 °C to +28 °C	
	R&S®ZVB4 and R&S®ZVB8	
	for +20 dB to -60 dB	
	50 MHz to 4 GHz	<0.1 dB
	4 GHz to 6 GHz (R&S®ZVB8 only)	<0.1 dB
	6 GHz to 8 GHz (R&S®ZVB8 only)	<0.2 dB
	R&S®ZVB14 and R&S®ZVB20	
	for +20 dB to -30 dB	
	50 MHz to 700 MHz	<0.1 dB
	for +20 dB to +10 dB	
	700 MHz to 8 GHz	<0.3 dB
	for +15 dB to +10 dB	
	above 8 GHz	<0.3 dB
	for +10 dB to -45 dB	
above 700 MHz	<0.1 dB	
Damage level		+27 dBm
Damage DC voltage		30 V
Noise level	at 10 Hz measurement bandwidth	
	R&S®ZVB4 and R&S®ZVB8	
	300 kHz to 100 MHz	<-70 dBm
	100 MHz to 4 GHz	<-110 dBm
	4 GHz to 8 GHz (R&S®ZVB8 only)	<-105 dBm
	R&S®ZVB14 and R&S®ZVB20	
	100 MHz to 700 MHz	<-70 dBm
	700 MHz to 8 GHz	<-105 dBm
above 8 GHz	<-100 dBm	
The noise level is defined as the rms value of the specified noise floor.		

Additional front panel connectors

USB	(two) universal serial bus connectors for connecting USB devices (USB 1.1); two additional USB connectors at the rear panel
------------	---

Display

Screen	21 cm (8.4") diagonal color LCD
Resolution	800 × 600 × 262144 (high color)

Rear panel connectors

IEC BUS	remote control in line with IEEE488, IEC60625; 24 pins
----------------	--

LAN 1	first local area network connector, 8 pins, RJ-45
--------------	---

LAN 2	second local area network connector, 8 pins, RJ-45
--------------	--

USB	(two) universal serial bus connectors for connecting USB devices (USB 1.1); two additional USB connectors at the front panel
------------	--

10 MHz REF	alternatively input or output for external frequency reference signal	
Connector type		BNC, female
Input frequency		10 MHz
Maximum permissible deviation		1 kHz
Input power		0 dBm ±3 dB
Input impedance		50 Ω
Output frequency		10 MHz
Output frequency accuracy		80 Hz
Output power		-3 dBm ±8 dB at 50 Ω

DC MEAS 1 V	DC measurement input	
Connector type		4-pin mini DIN, female
Voltage range		-1 V to +1 V
Measurement accuracy		2.5 % of reading + 2.5 mV
Resolution		12 bits
Sample rate		3 MHz
Input impedance		>10 kΩ
Damage voltage		30 V

DC MEAS 10 V	DC measurement input	
Connector type		4-pin mini DIN, female
Voltage range		-10 V to +10 V
Measurement accuracy		2.5 % of reading + 25 mV
Resolution		12 bits
Sample rate		3 MHz
Input impedance		>10 kΩ
Damage voltage		30 V

PORT BIAS	DC bias input for PORT	
Connector type		BNC, female
Maximum nominal input voltage		30 V
Maximum nominal input current		200 mA
Damage voltage		30 V
Damage current		500 mA

MONITOR	IBM-PC-compatible VGA monitor connector, 15-pin D-Sub (for external monitor)	
----------------	--	--

USER CONTROL	several control and trigger signals, 25-pin D-Sub, 3.3 V TTL for controlling external generators, for limit checks, sweep signals, etc	
FOOT SWITCH 1 and FOOT SWITCH 2	pin 24 and pin 25 (inputs)	control inputs
DRIVE PORT 1 to DRIVE PORT 4	pin 16 to pin 19 (outputs)	indicate driving port
CHANNEL BIT 0 to CHANNEL BIT 3	pin 8 to pin 11 (outputs)	channel-specific user-configurable bits
PASS 1 and PASS 2	pin 13 and pin 14 (outputs)	pass/fail results of limit checks
BUSY	pin 4 (output)	measurements running
READY FOR TRIGGER	pin 6 (output)	ready for trigger
EXT GEN TRIGGER	pin 21 (output)	control signal for external generator
EXT GEN BLANK	pin 22 (input)	handshake signal from external generator
EXTERNAL TRIGGER	pin 2 (input)	trigger input for analyzer

EXT TRIGGER	trigger input for analyzer	
Connector type		BNC, female
TTL signal (edge-triggered)		3 V
Polarity (selectable)		positive or negative
Minimum pulse width		1 μ s
Input impedance		>10 k Ω

Options

Generator step attenuators	extend the lower limit of the output power range of the R&S®ZVB4 or the R&S®ZVB8 by 70 dB	
Frequency range	R&S®ZVB4 R&S®ZVB8	300 kHz to 4 GHz 300 kHz to 8 GHz
Power range		upper limit is reduced by 8 dB, lower limit is extended by 70 dB
Power accuracy	at –10 dBm without power calibration	identical to specifications without optional step attenuators
Power linearity	above –30 dBm	identical to specifications without optional step attenuators
	–30 dBm to –70 dBm	<2 dB
	–70 dBm to –100 dBm	<3 dB
Match	without system error correction	
	R&S®ZVB4	
	300 kHz to 2 GHz	>14 dB
	2 GHz to 4 GHz	>16 dB
	R&S®ZVB8	
	300 kHz to 2 GHz	>14 dB
	2 GHz to 7 GHz	>16 dB
7 GHz to 8 GHz	>14 dB	
Receiver linearity	referenced to –10 dBm	
	in temperature range +18 °C to +28 °C	
	for +13 dB (typ. +20 dB) to –60 dB	
	50 MHz to 4 GHz	<0.1 dB
	4 GHz to 6 GHz	<0.1 dB
	6 GHz to 8 GHz	<0.2 dB
Dynamic range		is reduced by 8 dB

Direct generator/receiver access	These options permit direct access to the internal source output as well as to the internal reference and measurement receiver inputs via the front panel connectors (SMA) of the R&S®ZVB14 or the R&S®ZVB20.	
Frequency range	R&S®ZVB14 R&S®ZVB20	10 MHz to 14 GHz 10 MHz to 20 GHz
Dynamic range	R&S®ZVB14	
	10 MHz to 13 GHz 13 GHz to 14 GHz	is reduced by 2 dB is reduced by 4 dB
	R&S®ZVB20	
	10 MHz to 13 GHz 13 GHz to 20 GHz	is reduced by 2 dB is reduced by 4 dB
Power range	R&S®ZVB14	
	10 MHz to 13 GHz 13 GHz to 14 GHz	upper limit is reduced by 1 dB upper limit is reduced by 2 dB
	R&S®ZVB20	
	10 MHz to 13 GHz 13 GHz to 20 GHz	upper limit is reduced by 1 dB upper limit is reduced by 2 dB
Match	R&S®ZVB20	
	16 GHz to 20 GHz	is reduced by 1 dB
Noise level	R&S®ZVB14	
	10 MHz to 13 GHz 13 GHz to 14 GHz	is increased by 1 dB is increased by 2 dB
	R&S®ZVB20	
	10 MHz to 13 GHz 13 GHz to 20 GHz	is increased by 1 dB is increased by 2 dB

General data

Temperature loading	operating temperature range	+5 °C to +40 °C
	storage temperature range	−40 °C to +70 °C in line with IEC 60068-2-1 and IEC 60068-2-2
Damp heat		+40 °C at 95 % rel. humidity, in line with IEC 60068-2-30
Mechanical resistance	vibration, sinusoidal	5 Hz to 150 Hz, in line with IEC 60068-2-6
	vibration, random	10 Hz to 300 Hz, in line with IEC 60068-2-64
	shock	40 g shock spectrum, in line with IEC 60068-2-27, MIL-STD 810
Calibration interval		1 year
EMC	RF emission	in line with CISPR 11/EN 55011 group 1 class A for a shielded test setup
	other emissions and immunity	in line with IEC/EN 61326, emission class B (residential environment), immunity industrial environment (excluding operating frequency)
Safety		in line with IEC 61010-1, EN61010-1, and UL 3111-1
Power supply		100 V to 240 V (AC) with tolerance ±10 %, 50 Hz to 60 Hz with tolerance ±5 %, safety class I to VDE 411
Power consumption		450 W, typ. 350 W (standby: typ. 10 W)
Conformity mark		VDE, GS, CSA, CSA-NRTL/C, CE
Dimensions (W × H × D)	R&S®ZVB4 and R&S®ZVB8	465.1 mm × 241.8 mm × 417.0 mm (18.31 in × 9.52 in × 16.42 in)
	R&S®ZVB14 and R&S®ZVB20 with two ports and order numbers 1145.1010.14 and 11451010.20	465.1 mm × 241.8 mm × 417.0 mm (18.31 in × 9.52 in × 16.42 in)
	R&S®ZVB14 and R&S®ZVB20 with two ports and order numbers 1145.1010.17 and 11451010.23, or with four ports	465.1 mm × 286.2 mm × 417.0 mm (18.31 in × 11.27 in × 16.42 in)
Weight	R&S®ZVB4 and R&S®ZVB8	18 kg (40 lb)
	R&S®ZVB14 and R&S®ZVB20 with two ports and order numbers 1145.1010.14 and 11451010.20	16 kg (35 lb)
	R&S®ZVB14 and R&S®ZVB20 with two ports and order numbers 1145.1010.17 and 11451010.23, or with four ports	20 kg (44 lb)
Shipping weight	R&S®ZVB4 and R&S®ZVB8	29 kg (64 lb)
	R&S®ZVB14 and R&S®ZVB20 with two ports and order numbers 1145.1010.14 and 11451010.20	30 kg (66 lb)
	R&S®ZVB14 and R&S®ZVB20 with two ports and order numbers 1145.1010.17 and 11451010.23, or with four ports	32 kg (71 lb)

Ordering information

Designation	Type	Order No.
Vector Network Analyzer, 4 GHz, 2 ports	R&S®ZVB4	1145.1010.04
Vector Network Analyzer, 4 GHz, 4 ports	R&S®ZVB4	1145.1010.06
Vector Network Analyzer, 8 GHz, 2 ports	R&S®ZVB8	1145.1010.08
Vector Network Analyzer, 8 GHz, 4 ports	R&S®ZVB8	1145.1010.10
Vector Network Analyzer, 14 GHz, 2 ports	R&S®ZVB14	1145.1010.14
Vector Network Analyzer, 14 GHz, 2 ports	R&S®ZVB14	1145.1010.17
Vector Network Analyzer, 14 GHz, 4 ports	R&S®ZVB14	1145.1010.19
Vector Network Analyzer, 20 GHz, 2 ports	R&S®ZVB20	1145.1010.20
Vector Network Analyzer, 20 GHz, 2 ports	R&S®ZVB20	1145.1010.23
Vector Network Analyzer, 20 GHz, 4 ports	R&S®ZVB20	1145.1010.25
Options		
Direct generator/receiver access		
Direct Generator/Receiver Access for the R&S®ZVB14 1145.1010.17 only	R&S®ZVB14-B16	1164.1240.17
Direct Generator/Receiver Access for the R&S®ZVB14 1145.1010.19 only	R&S®ZVB14-B16	1164.1240.19
Direct Generator/Receiver Access for the R&S®ZVB20 1145.1010.23 only	R&S®ZVB20-B16	1164.1240.23
Direct Generator/Receiver Access for the R&S®ZVB20 1145.1010.25 only	R&S®ZVB20-B16	1164.1240.25
Generator step attenuators (for the R&S®ZVB4 and R&S®ZVB8 only)		
Generator Step Attenuator for Port 1	R&S®ZVB8-B21	1302.5480.02
Generator Step Attenuator for Port 2	R&S®ZVB8-B22	1302.5073.02
Generator Step Attenuator for Port 3	R&S®ZVB8-B23	1302.5496.02
Time Domain	R&S®ZVAB-K2	1164.1657.02
Mixer and Harmonic Measurements	R&S®ZVB-K3	1164.1592.02



For product brochure, see PD 0758.1529.12
and www.rohde-schwarz.com
(search term: ZVB)



ROHDE & SCHWARZ

www.rohde-schwarz.com

Europe: +49 1805 12 4242, customersupport@rohde-schwarz.com
USA and Canada: +1-888-837-8772, customer.support@rsa.rohde-schwarz.com
Asia: +65 65 130 488, customersupport.asia@rohde-schwarz.com