

Agilent 86105B 15 GHz Optical and 20 GHz Electrical Plug-In Module

Test a wide variety of telecom and datacom transmission rates with the 86105B multi-rate compliance filter module

The 86105B Infiniium DCA plug-in module offers unprecedented optical filter coverage for SONET/SDH and Datacom/Enterprise technologies at 10 Gb/s and below.

With the increased need to address the bottleneck concerns within the Enterprise and Telecom networks, network equipment elements and their components need to be engineered with flexibility, performance and cost in mind. The 86105B now allows designers and manufacturers to test transmitter compliance and perform waveform characterization on multiple technologies and data rates with a single module.

Component/System Design and Manufacturing

The 86105B gives designers and manufacturers the ability to accurately characterize the transmission performance of components and systems that cross the

boundary between Telecom (e.g. SONET/SDH) and Datacom/Enterprise (e.g. Ethernet) technologies. Such examples would include 10 Gb/s 200/300 pin MSA

transponders which may be designed to conform to different standards and different data rates. Also new devices being designed for emerging standards, such as Xenpaks for 10 Gb Ethernet or small form factor (SFF and SFP) transceivers for the OC-48 market.

OC-192 SONET transmission has various specified rates depending on the technology being implemented and the network being designed. The OC-192 rate is 9.953 Gb/s. The rate goes up to 10.664 Gb/s with the addition of Forward Error Correction (FEC). In addition there is

now OTN G.709, which adds additional network and further increases the rate to 10.71 Gb/s. To meet this increased transmission speed, components must scale and be tested accordingly.

In the midst of increasing SONET/SDH rates, new Datacom/Enterprise standards are emerging such as



Unprecedented Filter Rate Coverage

Data Rate	Standard	Option 86105B -101	Option 86105B -102	Option 86105B -103
155 Mb/s	OC-3		X	
622 Mb/s	OC-12		X	
1063 Mb/s	Fibre Channel			X
1250 Mb/s	GbE			X
2125 Mb/s	2x Fibre Channel			X
2488 Mb/s	OC-48		X	X
2500 Mb/s	2xGbE		X	X
2500 Mb/s	InfiniBand		X	X
2666 Mb/s	OC-48 (FEC)		X	
9.953 Gb/s	OC-192	X	X	X
10.3125 Gb/s	10GbE	X	X	X
10.51875 Gb/s	10x Fibre Channel	X	X	X
10.664 Gb/s	OC-192 (FEC)	X	X	X
10.709 Gb/s	OC-192 (ITU-T G.709)	X	X	X

Specifications (Preliminary)

Bandwidth	15 GHz Optical and 20 GHz Electrical
Wavelength	1000–1600 nm
Sensitivity (typical)	–12 dBm
RMS noise	5 µW
Fibre Input	Single Mode




Agilent Technologies

10 Gb Ethernet and 10X Fibre Channel, which run at 10.3125 Gb/s and 10.51875 Gb/s respectively. Switching and routing systems are required to interface some of these technologies (specifically the IEEE 802.3 Ethernet standards and SONET) at varying rates. Therefore, the ability to test and characterize performance across a wide range of technologies and data-rates is essential in the R&D and manufacturing environments.

Multi-port and multi-rate system/component designers and

manufacturers can take advantage of both the wide filter coverage and -12 dBm sensitivity of the 86105B. With this module it is now possible to characterize optical transmission performance of all SONET, Ethernet, and Fibre Channel technologies, from 155 Mb/s through to 10 Gb/s. In addition, new Infiniium DCA 86100A/B firmware now supports mask testing for emerging standards such as optical InfiniBand and electrical XAUI signaling.

86105B
15 GHz Opt. BW
Sensitivity Spec:
-12 dBm @1310 nm

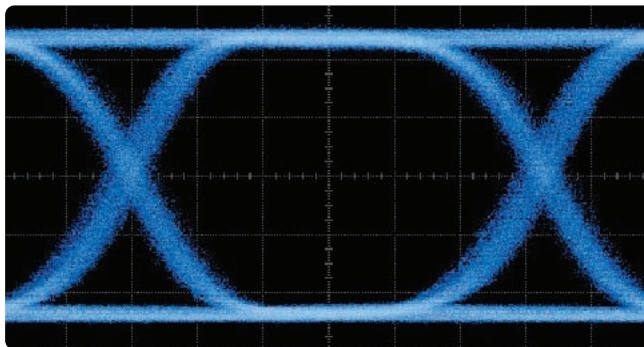

By internet, phone, or fax, get assistance with all your test & measurement needs.

Online assistance:
www.agilent.com/comms/dca



Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.

Phone or Fax

United States:
(tel) 1 800 452 4844

Canada:
(tel) 1 877 894 4414
(fax) (905) 282 6495

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:
(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:

(tel) (65) 6375 8100
(fax) (65) 6836 0252
Email: tm_asia@agilent.com

Product specifications and descriptions in this document subject to change without notice.

© 2002, 2004 Agilent Technologies
Printed in USA February 4, 2004
5988-6929EN



Agilent Technologies