


Agilent E6237A VXI Pentium® Real-Time Controller (LynxOS/166 MHz)

Data Sheet

- 2-Slot, C-size, message-based controller
- 166 MHz Intel Pentium® Processor
- LynxOS real-time operating system
- Deterministic interrupt latency of 400 μ sec
- SICL/C-SCPI support
- Upgrade memory using standard SODIMMS

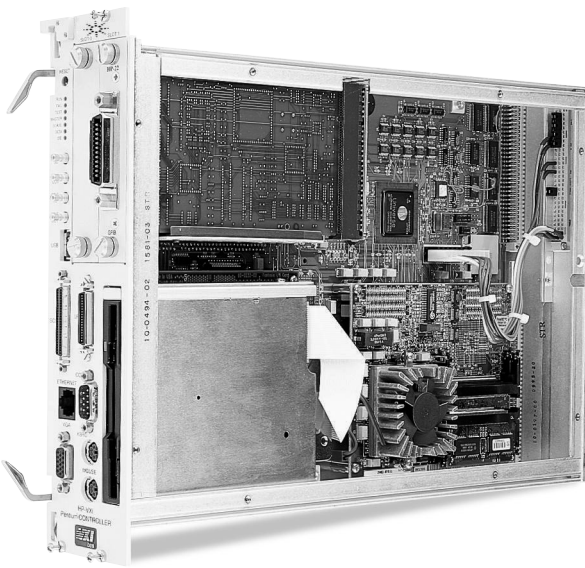

Agilent E6237A

Description

The Agilent E6237A is a **C-size, 2-slot, message-based, real-time controller** and can be used in all Agilent C-size mainframes. Embedding the controller in the VXI chassis allows direct computer access of other VXI devices, system memory, and triggers as though they were part of the controller hardware. A separate command module is not needed.

The E6237A accesses the VXIbus with a full 32-bit wide data path (D32) for highest performance. It has one additional EXM slot for inclusion of an additional interface that can be ordered separately. For an alternative data path into and out of your VXI system, LAN connection is standard on this module.


This real-time controller supports the Agilent SICL I/O library and Agilent C-SCPI instrument command language.

This product includes a 166 MHz processor, 2.16 GB disk, 3.5" floppy drive, 32 MB RAM, SCSI-2, RS-232, GPIB, ECP parallel port, SVGA I/F with 2 MB VRAM, two PS-2 ports, and one EXM expansion slot.

Option 001 includes LynxOS PosixWorks development software and Agilent SICL/C-SCPI development software on CD-ROM and all user documentation. PosixWorks features TotalView, a multi-process debugger, and TimeScan, a performance analyzer, for optimizing your code development efficiency. Option 002 includes run-time licenses for LynxOS and Agilent software.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

Note: This product uses a notebook-style 2.5" hard drive intended for low-usage operation. Applications that require frequent (more than once per minute) disk read/writes continuously over long periods may cause premature failure of the hard disk. For these applications, you should consider using an external SCSI hard drive, either a standalone drive or a VXI disk, such as the E3249B.



Product Specifications

Processor:	Intel Pentium®
Clock speed:	166 MHz
Performance	
MIPS:	—
MFLOPS:	n/a
SPECmark 89:	—
SPEC int92:	4.82
SPEC fp92:	3.40
SPEC int95_base95:	4.82
SPEC fp95_base95:	2.68
X11 Xmark 93:	n/a
SPECrate int92:	n/a
SPECrate fp92:	n/a
Main memory:	32-128 MB
Built-in interfaces:	Two PS-2 ports SVGA w/2 MB Video RAM RS-232 LAN GPIB ECP Parallel SCSI-2 USB Trigger I/O Clock I/O
Additional interfaces:	GPIB 2-channel RS-232 Thick/thin LAN
Expansion slots:	1 EXM
Graphics support:	Color 640 x 480 800 x 600 1024 x 768 1280 x 1024
Internal mass storage:	2.16 GB Hard Drive 3.5-in Floppy Drive
O.S. (earliest supported):	LynxOS rev 2.5

Environmental Specifications

EMC Specifications:	Meets CISPR 11, 1990/EN 55011 (1991): Group 1, Class A
Shock:	
Operating:	30 g 11 ms, half sine pulse
Non-operating:	50 g 11 ms, half sine pulse
Vibration:	
Operating:	2.5 g acceleration over 5-300 Hz sine wave (P-P), 1 oct/min sine sweep
Non-operating:	5 g acceleration over 5-300 Hz sine wave (P-P), 1 oct/min sine sweep
Environmental- temperature:	
Operating:	5 to 45 °C derated 2 °C per 1000 ft (300 m) over 6600 ft (2000 m)
Non-operating:	-40 to 65 °C (HDD limits)
Environmental-max. altitude:	
Operating:	10,000 ft (3,000 m)
Non-operating:	40,000 ft (12,000 m)
Environmental-rel. humidity:	
Operating:	8-90% non-condensing
Non-operating:	5-95% non-condensing

VXI Characteristics

VXI device type:	Message-based controller
Size:	C
Slots:	2
Connectors:	P1/2
Shared memory:	n/a
VXI busses:	TTL Trigger Bus, ECL Trigger Bus
C-size compatibility:	n/a

Module Current

	I_{PM}	I_{DM}
+5 V:	11 A	0.02 A
+12 V:	40.2 mA	0.01 A
-12 V:	2.4 mA	0.01 A
+24 V:	0	0
-24 V:	0	0
-5.2 V:	335 mA	0.001 A
-2 V:	120 mA	0.006 A

Cooling/Slot

Watts/slot:	29
ΔP mm H ₂ O:	0.14
Air flow liter/s:	5.6

Ordering Information

Description	Product No.
VXI Pentium® Real-Time Controller*	E6237A*
Pentium Controller w/Development S/W	E6237A 001
Pentium Controller w/Run-time Software	E6237A 002
3 yrs. Return to Agilent to 1 yr. OnSite Warr.	E6237A W01
5 yrs. of Customer Return Repair Service	E6237A W50
16 Mbytes Additional RAM	E6245A
32 Mbytes Additional RAM	E6246A
Additional AU/ThinLAN/10baseT Interface	RADIS-00724
Add'l 8-Channel RS-232 Interface	RADIS-00820
Additional GPIB Interface	RADIS-00848
Additional 2-Channel RS-232 Interface	RADIS-00849

***Note: You must specify either Opt. 001 or Opt. 002 when ordering.**

Related Literature

2000 Test System and VXI Catalog CD-ROM,
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

2000 Test System and VXI Catalog,
Agilent Pub. No. 5980-0307E (overview of VXI products)

1998 Test System and VXI Products Data Book,
Agilent Pub. No. 5966-2812E

Online

Internet access for Agilent product information, services and support
www.agilent.com/find/tmdir

VXI product information
www.agilent.com/find/vxi

Defense Electronics Applications
www.agilent.com/find/defense_ATE

Agilent Technologies VXI Channel Partners
www.agilent.com/find/vxichanpart

Agilent Technologies' HP VEE Application Website
www.agilent.com/find/vee

Agilent Technologies Data Acquisition and Control Website
www.agilent.com/find/data_acq

Agilent Technologies Instrument Driver Downloads
www.agilent.com/find/inst_drivers

Agilent Technologies Electronics Manufacturing Test Solutions
www.agilent.com/go/manufacturing

Get assistance with all your test and measurement needs at
www.agilent.com/find/assist
or check your local phone book for the Agilent office
near you.

Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources (www.agilent.com).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

Phone and fax

United States:
Agilent Technologies
(tel) 1 800 452 4844

Canada:
Agilent Technologies Canada Inc.
(tel) 1 877 894 4414

Europe:
Agilent Technologies
Test & Measurement
European Marketing Organisation
(tel) (31 20) 547 2000

Japan:
Agilent Technologies Japan Ltd.
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:
Agilent Technologies
Latin American Region Headquarters, U.S.A.
(tel) (305) 267 4245
(fax) (305) 267 4286

Australia/New Zealand:
Agilent Technologies Australia Pty Ltd.
(tel) 1 800 629 485 (Australia)
(fax) (61 3) 9272 0749
(tel) 0 800 738 378 (New Zealand)
(fax) (64 4) 802 6881

Asia Pacific:
Agilent Technologies, Hong Kong
(tel) (852) 3197-7777
(fax) (852) 2506-9284

Data Subject to Change
© Agilent Technologies 2000
Printed in the U.S.A. 04/2000
Publication No.: 5965-8821E



Agilent Technologies
Innovating the HP Way