



Test & Inspection

OTDRs

Microscopes

Loss Test Sets

Power Meters

Cleaning Supplies

Table of Contents

Optical Time Domain Reflectometers (OTDR)

| | |
|---------------------------------------|---|
| M200 Handheld OTDR | 3 |
| M600 Mini-OTDR. | 5 |
| OFL-200 Single-mode OTDR | 6 |
| Fiber Rings and Fiber Boxes | 7 |

Fiber Optic Loss / Return Loss Test Sets

| | |
|--|----|
| TurboTest 500B - Broadband Loss/Return Loss Test Set | 8 |
| OLTS 5 - Broadband Loss Test Set | 9 |
| TurboTest 400 - Premises Certification Test Set | 10 |

Optical Power Meters

| | |
|--|----|
| OPM 1 – Optical Power Meter | 11 |
| OPM 4 – Optical Power Meter with Set Reference | 11 |
| OPM 5 – Optical Power Meter with Set Reference & Data Storage | 11 |

Light Sources

| | |
|---|----|
| OLS 1 – LED Light Source | 13 |
| OLS 1-DUAL – LED Light Source with Wave ID | 13 |
| OLS 2 – Laser Light Source | 13 |
| OLS 2-DUAL – Laser Light Source with Wave ID | 13 |
| OLS 4 – Integrated Laser and LED Light Source with Wave ID. | 14 |
| OLS 7 – Triple Wavelength Laser Source with Wave ID | 14 |
| OLS 7-FTTH – Triple Wavelength Laser Source with Wave ID | 14 |

Fiber Optic Loss Test Kits

| | |
|--|----|
| CKM 2 – Multimode Kit with Set Reference | 16 |
| CKSM 2 – Multimode/Single-mode Kit with Set Reference | 16 |
| MLP 1 – Basic Multimode Kit | 17 |
| MLP 4-2 – Multimode Kit with Wave ID & Set Reference. | 17 |
| MLP 5-2 – Multimode Kit with Wave ID, Set Ref. & Data Storage | 17 |
| SLP 4-6D – Single-mode Kit with Wave ID & Set Reference | 18 |
| SLP 4-7 – Triple Wave Kit with Wave ID & Set Reference | 18 |
| SLP 4-FTTH – Triple Wave Kit with Wave ID & Set Reference. | 18 |
| SLP 5-6D – Single-mode Kit with Wave ID & Set Reference | 18 |
| SLP 5-7 – Triple Wave Kit w/ Wave ID, Set Ref. & Data Storage | 18 |
| SMLP 4-4 – Single-mode/Multimode Kit with Wave ID & Set Reference. | 19 |
| SMLP 5-5 – Single-mode/Multimode Kit with Wave ID, Set Reference & Data Storage | 19 |

Fiber Optic Inspection Microscopes

| | |
|---|----|
| Microscopes for Fiber Optic Connectors on Patch Cords | |
| OFS 300 – Optical Microscope | 21 |
| VS 300 – View Safe Video Microscope | 21 |
| Video Microscope for Fiber Optic Connectors in Panels | |
| VFS 2 – Video Microscope | 22 |
| VCP 1 - USB Video Capture Port | 23 |

Visible Laser Sources

| | |
|---|----|
| VFI 2 - Visible Red Laser Source | 24 |
| HiLite - Compact Visible Red Laser Source | 24 |
| MT Tracer - Multi-fiber Visual Fault Identifier | 24 |

Fiber Optic Talk Sets

| | |
|--|----|
| FTS 1 - Single-mode or Multimode Talk Set. | 25 |
| FTS 2 - Long Range Single-mode Talk Set. | 25 |
| FTS 20C - Clip-on Coupler | 25 |

Fiber Optic Attenuators


| | |
|---|----|
| SVA 1 - Single-mode Variable Attenuator | 36 |
| VOA 5 - Variable Fiber Optic Attenuator | 36 |

Fiber Identifier

| | |
|------------------------------------|----|
| Optical Fiber Identifiers. | 27 |
|------------------------------------|----|

Cleaning Supplies

| | |
|--|----|
| FCP1 - Fiber Cleaning Pack | 29 |
| CCT - Connector Cleaning Tips | 30 |
| FCC2 - Fiber Connector Cleaner | 31 |
| FPF1 - Fiber Preparation Fluid | 32 |



AFL Telecommunications' Noyes Test & Inspection Equipment product line offers a comprehensive set of fiber optic test equipment for measuring, maintaining and documenting the performance of fiber optic networks. In every area of manufacturing, AFL Telecommunications combines the latest equipment, production techniques and test systems to create products with world-class performance.



M200 Handheld OTDR

The Noyes M200 from AFL Telecommunications offers unmatched OTDR capabilities in a handheld package weighing less than 1 kg (2 lb). Multimode, Single-mode, and ‘Quad’ wavelength models are offered. With short dead zone and intermediate range specifications, the M200 is ideal for Tier 2 testing of premises (building and campus) networks or certification and troubleshooting of FTTX PON networks. And its bright, transreflective display makes it suitable for both indoor and outdoor operation.

The M200 is based on a new hardware/software platform that supports automatic and manual setup, precision event analysis, dual-wavelength testing, fiber identification using Noyes ‘TR’ test receivers, rich file naming and folder setup, 6 hour battery life, internal and removable media data storage, and USB connectivity. Test ports are equipped with tool-free adapters, which can be changed in seconds. A custom-designed polycarbonate case and shock-absorbing boot make it our most rugged OTDR ever.

Results are saved as industry standard .SOR files, which can be viewed, printed, and analyzed on a PC using free-ware available to you and your customers (go to www.aftele.com to download). Unit firmware, user settings, and test results are saved in non-volatile memory. Thus the M200 may be stored with battery removed for an extended period of time and still be up and running in seconds when needed.

Features

- Handheld, 0.9 kg (2 lb)
- 850/1300/1310/1550 nm
- 1.5 m (typ.) event dead zone
- 22 dB (MM), 26 dB (SM) dynamic range
- Integrated VFL (650 nm)
- Tool-free, switchable adapters (ST/SC/FC)
- Bellcore (GR-196) .SOR file format
- CompactFlash™ memory card
- Tool-free Lilon battery (6 hour life)
- Transflective (indoor/outdoor) touch-screen display

Applications

- Tier 2 testing of premises networks
- FTTX PON certification and troubleshooting
- Fast fault location
- Splice verification
- Network documentation



Ordering Information

| MODEL NUMBER | DESCRIPTION | TEST PORT ADAPTERS |
|--------------|---|----------------------------|
| M200-K-QUAD | 850/1300 nm multimode and 1310/1550 nm single-mode OTDR | (2) ST, (2) SC, and (1) FC |
| M200-K-MM | 850/1300 nm multimode OTDR | ST and SC |
| M200-K-SM | 1310/1550 nm single-mode OTDR | SC and FC |

All models include a rugged, soft-sided carry case with shoulder strap, 110/220 VAC power adapter with country-specific power cord, and user guide.

M200 Handheld OTDR

Specifications

| OTDR SPECIFICATIONS | | |
|-------------------------------------|---|----------------------------------|
| | MULTIMODE | SINGLE-MODE |
| Emitter Type | Laser | |
| Safety Class | Class 1 FDA 21 CFR 1040.0 & 1040.11 | |
| Center Wavelengths | 850/1300 nm | 1310/1550 nm |
| Wavelength Tolerance | ± 20 / ± 30 nm | ± 20 / ± 30 nm |
| Dynamic Range (SNR = 1) | 22 dB | 26 dB |
| Event Dead Zone ¹ | 1.5 m | 1.5 m |
| Attenuation Dead Zone ² | 9 m | 9 m |
| Pulse Widths ³ | 10, 30, 100, 300 ns, 1, 3 μs | 10, 30, 100, 300 ns, 1, 3, 10 μs |
| Range | 250 m to 64 km | 250 m to 208 km |
| Data Points | Up to 16,000 | Up to 16,000 |
| Data Point Spacing | 0.25 m (range ≤ 4 km) Range/16000 (range ≥ 8 km) | |
| Group Index of Refraction (GIR) | 1.4000 to 1.6000 | |
| Trace File Format | Bellcore GR-196 Version 1.1 | |
| Trace File Storage Medium | Internal, non-volatile memory and removable Compact Flash Card | |
| Trace File Storage Capacity | > 100 internal; thousands on Compact Flash | |
| Distance Uncertainty (m) | ± (1 + 0.005% x distance + data point spacing) | |
| VISUAL FAULT LOCATOR SPECIFICATIONS | | |
| Emitter Type | Laser | |
| Safety Class | Class II FDA 21 CFR 1040.10 & 1040.11; IEC 825-1:1993, EN60825-1:1994 | |
| Wavelength | 650 nm | |
| Output Power (nominal) | 0.8 mw | |
| GENERAL SPECIFICATIONS | | |
| Size (in boot) | 23 x 11 x 7 cm (8.8 x 4.3 x 2.8 inches) | |
| Weight | 0.9 kg (2 lb) | |
| Operating Temperature | -10 to +50 °C | |
| Storage Temperature | -20 to +60 °C | |
| Relative Humidity | 0 to 95% RH (non-condensing) | |
| Power | Removable Lilon or 110/220 VAC power adapter | |
| Battery Life ⁴ | 6 hours | |
| Recharge Time ^{4&5} | 3 hours | |

All specifications are subject to change.

All specifications valid at 23°C ± 2°C (73.4°F ± 3.6°F) unless otherwise specified.

1. Typical distance between the two points 1.5 dB down each side of a reflective spike caused by a -40 dB (Multimode) or -45 dB (single-mode) event using 10 ns pulse width.
2. Typical distance from event location to point where trace is within 0.5 dB of backscatter.
3. 3 μs pulse width not available at 850 nm.
4. New battery.
5. Typical, from fully discharged to fully charged state, unit may be operating.



M600 Mini-OTDR

The M600 is a full-featured mini-OTDR designed to accept both multimode (850/1300nm) and single-mode (1310/1550nm) modules for testing flexibility. Modules are user installable. All M600 models include: a 7.7-inch color LCD display, CompactFlash™ drive and memory card capable of storing up to 1,500 traces, 3.5-inch floppy disk drive, full-sized keyboard, and soft carry case. Pulse width and range can be set automatically for maximum ease-of-use, or manually for maximum flexibility. The M600 OTDR may be equipped with a Visible Fault Identifier (VFI) module. The VFI module is a 650 nm visible red laser source designed to fault-locate and trace optic cables

Features

- Available multimode (850/1300 nm), single-mode (1310/1550 nm), or four-wavelength configurations
- Automatic or manual set up
- Real-time testing
- Large, backlit, color display
- Keyboard w/ full-sized keys for fast entry
- Trace storage: CompactFlash™ card (> 1500 traces), 3.5" diskettes (50 traces), and internal memory (> 350 traces)
- Trace600 Software for Windows®
- M600-VFI module available

Ordering

| MODEL | DESCRIPTION |
|--------------------|---|
| M600-K | M600 kit with no modules |
| M600-K-MM1-xx | M600 kit w/ 850/1300nm multimode module |
| M600-K-SM1-yy | M600 kit w/ 1310/1550nm single-mode module |
| M600-K-QUAD-xx -yy | M600 kit w/ 850/1300nm multimode and 1310/1550nm single-mode module |
| M600-VFI | M600 kit w/ 650nm Visible Fault Identifier, Class II Laser |
| 5150-00-0001 | M600 external keyboard |
| 4050-00-0109 | M600 spare AC Adapter (niversal - specify cord type) |
| M600-00-0902 | FC adapter kit |
| M600-00-0900 | SC adapter kit |
| M600-00-0901 | ST adapter Kit |
| 3900-02-0100 | M600 Spare Battery |

Specifications

| PARAMETER | VALUE | |
|------------------------|---|----------------|
| | M600-MM1 | M600-SM1 |
| Center Wavelengths | 850 /1300 (nm) | 1310/1550 (nm) |
| Testing Applications | Multimode | Single-mode |
| Dynamic Range | 21 / 23 dB | 26 / 26 dB |
| Emitter Type | Laser | |
| Emitter Classification | Class I (FDA 21 CFR 1040.10 & 1040.11) | |
| Display Resolution | 0.1 m | |
| Event Dead Zone | < 5 m | |
| Attenuation Dead Zone | < 15 m | |
| Index of Refraction | 1.400 - 1.699 | |
| Display | High resolution color, 7.4 ", adjustable contrast | |
| Distance Display Units | m, km, ft, mi | |
| Power | Lead acid rechargeable battery or AC | |
| File Transfer to PC | 3.5 in. floppy disk, CompactFlash™ reader (USB) | |
| Trace Storage | > 1500 CompactFlash™ ; > 350 internal; 50 per floppy disk | |
| Operating Temp. | 0° to + 40° C | |
| Storage Temp. | -10° to + 60° C | |
| Relative Humidity | 0 to 95% non-condensing | |
| Weight in Use | <10 lb (<4.5 kg) | |
| Size (H x W x D) | 10.5 x 10.75 x 4.5 in. (26.6 x 27.3 x 11.4 cm) | |

| MODEL | M600-VFI |
|------------------------|---|
| Center Wavelengths | 650 nm |
| Output | < 0 dBm (1 mW) |
| Emitter Type | Laser |
| Emitter Classification | FDA 21 CFR 1040.10 & 1040.11 CLASS II, IEC 825-1: 1993 CLASS II, EN60825-1: 1994 CLASS II |
| Transmission Mode | CW or 2 Hz, 50% Duty Cycle |
| Output Fiber | 9/125 μm, single-mode |
| Optical Connector | Universal Adapter (2.5 mm) |



OFL-200 Single-Mode OTDR

Smaller than many optical loss test sets, the OFL-200 has the range, features, and price to make it the perfect OTDR for outside plant crews installing and maintaining optical fiber cables in broadband, metro, access, and FTTH networks. The OFL-200 is a true OTDR, it detects fiber backscatter as well as fresnel reflections. The OFL-200 can locate reflective and non-reflective breaks, including those caused by crushed fibers. In addition, the OFL-200 provides an integrated 650 nm visual fault locator (VFL) for short-distance troubleshooting and fiber tracing. In [Full Auto] mode, the OFL-200 measures fiber length and sets range, pulse width, and averaging time automatically. [Full Auto] mode is ideal for operators not familiar with OTDRs. [Semi Auto] mode allows the user to set range while the OFL-200 sets all other parameters. [Manual] mode is available for experienced users. [Live] mode is provided for first connector checking and troubleshooting. The fast-change switchable adapter allows the OFL-200 to interface launch cables with a variety of connector styles. The OFL-200 can internally store up to 48 traces. Using the supplied serial cable, saved traces can be transferred to a PC for archiving, printing, and analyzing with the supplied Trace600 Windows® software. Test results are stored in Bellcore [*].sor GR-196 Version 1.1 format.

Features and Applications

- Designed for field use, rugged, handheld
- 1550 nm single-mode OTDR
- > 70 km effective range
- Cursor and zoom controls to measure event loss, reflectance, and location
- Launch level connection quality indicator

Ordering Information

MODEL: OFL-200

Unit with SC and FC adapter caps (ST and LC available), universal AC power adapter, country-specific line cord, manual, and carry case.

Specifications

| OTDR | |
|-----------------------------|---|
| Emitter type | Laser |
| Safety class | Class I, FDA 21 CFR 1040.10 & 1040.11 |
| Center wavelength (nominal) | 1550 nm |
| Dynamic range (SNR = 1) | 24 dB @ 10 μ s, 3 min. test |
| Event dead zone 1 | 2 m typical / 3 m maximum |
| Attenuation dead zone 2 | 14 m typical / 18 m maximum |
| Number of data points | 4000 on ranges \geq 4 km |
| Resolution | 1 m on ranges \leq 4 km; Range / 4,000 on ranges > 4 km |

| VISUAL FAULT LOCATOR (VFL) | |
|----------------------------|--|
| Emitter type | Laser |
| Safety class: | Class II, FDA 21 CFR 1040.10 & 1040.11 IEC 825-1: 1993, EN60825-1: 1994 |
| Wavelength | 650 nm |
| Output power (nominal) | 0.8 mW into 9 μ m single-mode optical fiber |

| GENERAL | |
|--------------------------------|---|
| Size (H x W x D) | 190 x 112 x 47 mm (7.5 x 4.4 x 1.9 inches) |
| Weight | 0.6 kg (1.3 lb) |
| Operating temperature | -10 oC to + 50 oC, 0 to 95% RH (non-condensing) |
| Storage temperature | -20 oC to + 60 oC, 0 to 95% RH (non-condensing) |
| Power | Rechargeable NiMH or AC adapter. Optional 4 x AA Alkaline |
| Battery life with backlight ON | NiMH: > 8 hours; 4 x AA: > 13 hours |

¹ 1.5 dB down from each side of the peak, -45 dB reflective event
² From the start of an event to within 0.5 dB of backscatter, -45 dB reflective event.

Fiber Rings and Fiber Boxes

Fiber Rings (FR) Specifications

| MODEL | CONFIGURATION | FIBER TYPE | FIBER LENGTH |
|------------------|--------------------------------|-------------------------|----------------|
| FR1-M5-150-x1-x2 | Standard, one fiber | Multimode, 50 μ m | 150 m (492 ft) |
| FR1-M6-150-x1-x2 | Standard, one fiber | Multimode, 62.5 μ m | 150 m (492 ft) |
| FR1-SM-150-y1-y2 | Standard, one fiber | Single-mode | 150 m (492 ft) |
| FR3-M5-x1-MTRJ | MT-RJ near-end, A and B fibers | Multimode, 50 μ m | 150 m (492 ft) |
| FR3-M6-x1-MTRJ | MT-RJ near-end, A and B fibers | Multimode, 62.5 μ m | 150 m (492 ft) |
| FR3-SM-x1-MTRJ | MT-RJ near-end, A and B fibers | Single-mode | 150 m (492 ft) |

Fiber Boxes (FB) Specifications

| MODEL | CONFIGURATION | FIBER TYPE | FIBER LENGTH |
|-------------------|---------------------|---------------------|------------------|
| FB1-SM-500-y1-y2 | Standard, one fiber | Single-mode, SMF-28 | 500 m (1640 ft) |
| FB1-SM-1000-y1-y2 | Standard, one fiber | Single-mode, SMF-28 | 1000 m (3281 ft) |

x1, x2 — connectors for multimode cables, specify type (e.g. ST, SC)
y1, y2 — connectors for single-mode cables, specify type (e.g. ST, SC, FC)
Other connector types, fiber types, and fiber lengths will gladly be quoted upon request.



Fiber Box (1 km)



Fiber Ring (150 m)

Fiber Optic Loss / Return Loss Test Sets

Noyes Fiber Systems Fiber Optic Loss / Return Loss Test Sets are designed to measure loss and return loss on high speed digital or analog fiber optic spans in Telecom, CATV, and IXC networks. Models are available to perform loss and return loss measurements on single-mode fibers at 1310, 1550 and 1625 nm. Supplied with Windows® compatible data analysis software (WinTest), test results can be transferred from the internal memory, via the RS-232 port, to a PC for full fiber documentation.



Turbotest 500B - Broadband Loss / Return Loss

The new T500B Series is the continuation of the popular Turbotest 500 product line. The T500B Series offers the latest technology in a single fiber bi-directional loss and return loss testing. Five compact models are available, including the three wavelength (1310/1550/1625) T506B and (1310/1550/1490) T506B-FTTH. An optional dedicated digital talk option is available for full time/full duplex communication between test operators while testing other fibers in a bundle. T500B units are sold individually but normally used in pairs.

Specifications

| MODEL | T503B | T504B | T505B | T506B | T506B-FTTH |
|---------------------------------------|--|------------|------------|------------------|------------------|
| Center Wavelengths (nm) | 1310, 1550 | 1310, 1550 | 1550, 1625 | 1310, 1550, 1625 | 1310, 1550, 1490 |
| Output Power (dBm) | -5 | -5 | -5 | -5 | -5 |
| Emitter Type | Laser | Laser | Laser | Laser | Laser |
| Safety Class | FDA 21 CFR 1040.10 and 1040.11, and IEC 60825-1 amended Q2, 2001 | | | | |
| Detector Type | InGaAs | InGaAs | InGaAs | InGaAs | InGaAs |
| Insertion Loss Measurement Range (dB) | 45 | 45 | 45 | 45 | 45 |
| Optical Power Measurement Range (dBm) | +6 to -70 | +26 to -50 | +26 to -50 | +26 to -50 | +26 to -50 |
| Optical Power Measurement Units | dB, dBm, μ W | | | | |
| ORL Dynamic Range (dB) | 65 | | | | |
| Available Connector Types | ASC or AFC | | | | |
| Power | Lithium-Ion or AC Adapter | | | | |
| Li-Ion battery pack charging temp. | -10 to +45°C | | | | |

Notes

Add -T for 40 dB 1310 nm Talk Set Option. Add -Y for 40 dB 1550 nm Talk Set Option. (Example: T506B-Y is 1310/1550/1625 Turbo with 1550nm Talk Set Option)
T500B instruments are sold individually but normally used in pairs

Fiber Optic Loss Test Sets



OLTS 5 - Broadband Loss

The OLTS 5 Optical Loss Test Set series offers end-to-end single-mode testing at either 1310/1550 nm (OLTS 5-3 model) or 1550/1625 nm (OLTS 5-5 model).

The OLTS 5 may be operated in automatic or manual test modes. In its “two-unit” automatic test mode, a pair of OLTS 5 test sets may be used to measure the end-to-end, bi-directional insertion loss of a pair of single-mode fibers at 1310/1550nm or 1550/1625 nm. Tests are started and controlled by the user from the OLTS 5 configured as the Main unit. Test progress messages and results are displayed on the Remote unit. Full test results can be reviewed and saved in the Main unit.

In its “single-unit” automatic test mode the OLTS 5 can measure bi-directional, dual-wavelength insertion loss of patch cords, or fiber optic cables while they are still on the reel.

In the manual operating mode individual OLTS 5 test sets can operate either as an optical power meter (OPM) or dual-wavelength laser source.

OLTS 5 units are sold individually but normally used in pairs.

Specifications

| MODEL | OLTS 5-3 | OLTS 5-5 |
|---|------------------------------------|------------------------------------|
| Center Wavelengths | 1310/1550 | 1550/1625 |
| Emitter Type | Laser | Laser |
| Output Power into 9/125 μ m (single-mode) Fiber (dBm) | -5 dBm (nominal) | -5 dBm (nominal) |
| Safety Class | FDA 1, IEC 1 | FDA 1, IEC 1 |
| Detector Type | InGaAs | InGaAs |
| OLTS Mode Insertion Loss Measurement Range (dB) | 45 | 45 |
| Optical Power Measurement Range (dBm) | +10 to -70 | +10 to -70 |
| Optical Power Measurement Units | dB, dBm, W | dB, dBm, W |
| Available Connector Types | ST, SC, FC | ST, SC, FC |
| Power | 2 AA Alkaline or 2-cell NiMH or AC | 2 AA Alkaline or 2-cell NiMH or AC |

Certification Test Sets

Testing fiber cable with the Turbotest 400 Series saves time and money. Once the testing standard has been selected, it's only moments after pressing the AutoTest key before PASS/FAIL results are displayed. AutoTests are based on length, propagation delay, dual-wavelength loss results and user-supplied data such as the number of splices and connections. The Turbotest 400 can also operate like a traditional optical power meter to measure optical power at 850, 1300, 1310, and 1550 nm. Using the supplied Windows® software, test results can be downloaded to your PC to document your network or to produce professional certification reports for your customer. The Turbotest 400 Series stores up to 1000 fiber test results in user defined files. To speed the testing process, both models can automatically increment fiber numbers. AutoTest certification standards include TIA 568-A, ISO 11801, EN 50173, 10 Base-FL, 100 Base-FX, 1000 Base-SX, 1000 Base-LX, and FDDI. Additional certification standards can be programmed by the user.



Turbotest 400 - Premises Certification

Turbotest 400 Fiber Certification Test Sets are designed to quickly test either multimode or single-mode fiber links, and generate certification reports based on the latest fiber standards. Two versions are available, the Turbotest 410 which operates at 850/1300 nm for multimode applications, and the Turbotest 420 which operates at 1310/1550 nm for single-mode applications.

Specifications

| MODEL | T410 | T420 |
|--|---------------------|---------------------|
| Center Wavelengths | 850/1300 | 1310/1550 |
| Emitter Type | LED | Laser |
| Safety Class | IEC 1 | FDA 1, IEC 1 |
| Detector Type | Ge | Ge |
| Link Certification Range – Loss (dB) – Length (km) | 11 5 | 11 20 |
| Power Meter Measurement Range (dBm) | 0 to -40 | 0 to -40 |
| Available Connector Types | ST, SC | ST, SC, FC |
| Power | 4 AA Alkaline or AC | 4 AA Alkaline or AC |

Accessories

| MODEL | DESCRIPTION |
|--------------|----------------------------------|
| 4050-00-0112 | AC Adapter, 100-240 VAC / 12 VDC |
| 6000-00-0003 | Serial Cable, 9-pin M to 9-pin F |

Optical Power Meters

Optical power meters may be used to measure optical power in premises, telco, or broadband fiber optic networks. When used with an LED or laser light source, an OPM can also measure the attenuation (insertion loss) of multimode or single-mode cables.



OPM 1 - Measures Optical Power in dBm

With only two controls – Power and Wavelength – the OPM 1 is our simplest to use optical power meter. Optical power in dBm and the calibration wavelength setting are displayed on an easy to read LCD display.



OPM 4 - Adds Wave ID and Set Reference

The OPM 4 offers automatic wavelength identification and switching when used with Wave ID light sources. The OPM 4 stores optical references for each calibrated wavelength. An easy to read Dual Wavelength LCD display with Backlight shows measured power [dBm or μ W] or insertion loss [dB], calibrated wavelengths, tone signal [Hz], wavelength ID, and the battery charge status.



OPM 5 - Adds Wave ID and Data Storage

The OPM 5 offers automatic wavelength identification and switching when used with Wave ID light sources. The OPM 5 stores optical references for each calibrated wavelength. An easy to read Dual Wavelength LCD display with Backlight shows measured power [dBm or μ W] or insertion loss [dB], calibrated wavelengths, tone signal [Hz], wavelength ID, and the battery charge status. Up to 500 records per wavelength of power or insertion loss measurements may be stored in internal non-volatile memory. Using the supplied Windows® compatible software and USB connection, test records may be transferred to a PC for storage, display, printing, and analysis.

Optical Power Meters

Specifications

| MODEL | OPM 1-2C | OPM 1-3C | OPM 4-1D | OPM 4-2D | OPM 4-3D | OPM 4-4D | OPM 5-2D | OPM 5-3D | OPM 5-4D |
|-----------------------------|-----------------------|-----------------------|---------------------------------|---------------------------------|---------------------------------|----------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Calibrated wavelengths (nm) | 850, 1300, 1310, 1550 | 850, 1300, 1310, 1550 | 660, 780, 850 | 850, 1300, 1310, 1550 | 850, 1300, 1310, 1550, 1625 | 850, 980, 1310, 1490, 1550, 1625 | 850, 1300, 1310, 1550 | 850, 1300, 1310, 1550, 1625 | 850, 980, 1310, 1490, 1550, 1625 |
| Detector type | Germanium | InGaAs | Silicon | Germanium | InGaAs | Filtered InGaAs | Germanium | InGaAs | Filtered InGaAs |
| Measurement range (dBm) | +6 to -60 | +6 to -70 | +6 to -70 | +6 to -60 | +6 to -70 | +26 to -50 | +6 to -60 | +6 to -70 | +26 to -50 |
| Measurement units | dBm | dBm | dB, dBm, μ W | dB, dBm, μ W | dB, dBm, μ W | dB, dBm, μ W | dB, dBm, μ W | dB, dBm, μ W | dB, dBm, μ W |
| Power | 9 volt | 9 volt | 2 x AA batteries, optional NiMH | 2 x AA batteries, optional NiMH | 2 x AA batteries, optional NiMH | 2 x AA batteries, optional NiMH | 2 x AA batteries, optional NiMH or AC | 2 x AA batteries, optional NiMH or AC | 2 x AA batteries, optional NiMH or AC |
| Wavelength ID | — | — | yes | yes | yes | yes | yes | yes | yes |
| Set reference | — | — | yes | yes | yes | yes | yes | yes | yes |
| Tone Detect* | | | yes | yes | yes | yes | yes | yes | yes |
| PC software & storage | — | — | — | — | — | — | yes | yes | yes |

* 270 Hz, 330 Hz, 1 kHz, and 2 kHz Tone detection.

Light Sources



OLS 1 LED Light Source

The OLS 1 series of LED light sources are inexpensive, practical instruments designed for performing insertion loss measurements on fiber optic links when used with an optical power meter. The LED output is stabilized to ensure accurate test results per current TIA/EIA requirements. The OLS 1 is easy to operate with only a power/wavelength select switch. Weighing only 0.65 lb, the OLS 1 is compact and convenient for field use.



OLS 1-Dual LED Light Source with Wave ID

The OLS 1-Dual light source features 850 nm and 1300 nm LED output from a single output port and is easy to operate with only a power button and a wavelength select button. This light source offers 3 modes of operation: Dual wavelengths sending ID, single wavelength sending ID, and CW. The output port is equipped with a removable SC (FC & ST available) adapter to allow the output connector to be inspected and cleaned. The LED output is stabilized to ensure accurate test results per current TIA/EIA requirements.



OLS 2 Laser Light Source

The OLS 2 laser source is a cost-effective, rugged, handheld instrument designed for performing insertion loss measurements on single-mode fiber optic links when used with an optical power meter. When paired with an optical fiber identifier, the OLS 2 may be used for fiber identification. The LASER output is stabilized to ensure accurate test results per current TIA/EIA requirements. Three versions of the OLS 2 are available for measurements at 1310 nm, 1550 nm, 1625 nm. These compact units operate in either continuous wave (CW) mode or 2 kHz modulated mode.



OLS 2 - Dual Laser Light Source with Wave ID

The OLS 2-Dual features 1310 nm and 1550 nm LASER output from a single output port and is easy to operate. The LASER output is stabilized to ensure accurate test results per current TIA/EIA requirements. This light source offers 4 modes of operation: Dual wavelengths sending ID, single wavelength sending ID, CW, and modulated tone. When paired with an optical fiber identifier, the OLS 2-Dual may be used for fiber identification. The output port is equipped with UCI based removable adapters to allow the output connector to be inspected and cleaned.

Light Sources (continued)



OLS 4 Integrated LED & Laser Light Source with Wave ID

The OLS 4 is an integrated, two-port LED and LASER light source. The LED and LASER outputs are stabilized to ensure accurate test results per current TIA/EIA requirements. The OLS 4 features 850 nm and 1300 nm LED output from a multimode output port and 1310 nm and 1550 nm LASER output from a single-mode output port. This light source offers 4 modes of operation: Dual wavelengths sending ID, single wavelength sending ID, CW, and modulated Tone. [Active Output], [Tone], [Battery], and [External Power] indicators identify the currently enabled operating mode, battery charge status, and external power presence. Both output ports are equipped with UCI based removable adapters to allow the output connectors to be inspected and cleaned.



OLS7 Triple Wavelength Laser Sources with Wave ID

The OLS7 laser source features 1310/1550/1625 nm triple wavelength LASER output from a single port and is easy to operate. Each wavelength may be transmitted individually at CW or with tone modulation at frequencies of 270Hz, 330Hz, 1kHz and 2kHz. Also, each wavelength may be transmitted with Wave ID. The OLS7-FTTH output port is equipped with UCI based removable adapters to allow the output connectors to be inspected and cleaned.

OLS7- FTTH Triple Wavelength Laser Source with Wave ID

The OLS7-FTTH laser source is designed specifically for today's FTTH network architectures. It features a triple wavelength LASER output from a single port: 1310nm output for testing in the upstream direction and 1490 or 1550nm, for testing in the downstream direction. The OLS7-FTTH output port is equipped with UCI based removable adapters to allow the output connectors to be inspected and cleaned.

Light Sources (continued)

Specifications

| PARAMETER | OLS 1-1C | OLS 1-2C | OLS 2-1300 | OLS 2-1550 |
|-----------------------------|-------------------------------|--------------------------------|--|--|
| Output wavelengths (nm) | 650 - red, 850 + 35/-40 | 850 + 35/-40, 1300 + 50/-10 | 1310 ±20 | 1550 ±20 |
| Output ports | 2 | 2 | 1 | 1 |
| Emitter type | LED | LED | Laser | Laser |
| Safety class | IEC 1 | IEC 1 | FDA 1, IEC 1 | FDA 1, IEC 1 |
| Output power (nominal, dBm) | -10 @ 660 nm >-20 @ 850 nm | -20 | -5 * | -5 * |
| Stability | ± 0.1 dB over 8 hours | ± 0.1 dB over 8 hours | ± 0.1 dB over 1 hour ± 0.15 dB over 8 hours | ± 0.1 dB over 1 hour ± 0.15 dB over 8 hours |
| Available connector types | ST | ST | FC, SC, ST | FC, SC, ST |
| Power | 9 volt or AC | 9 volt or AC | 9 volt or AC | 9 volt or AC |

* Adjustable ± 1dB

| PARAMETER | OLS 1-DUAL | OLS 2-DUAL | OLS 4 | OLS7-FTTH | OLS7 |
|---------------------------|--|---|--|---|---|
| Output wavelengths (nm) | 850 ±30, 1300 +50/-10 | 1310 ±20 1550 ±20 | 850 ± 30 nm, 1300 -10/+50 nm (MM port) 1310 ± 20 nm,, 1550 ± 20 nm (SM port) | 1310 ±20, 1490 ±20, 1550 ±20 | 1310 ±20, 1550 ±20, 1625 ±20 |
| Output ports | 1 | 1 | 2 | 1 | 1 |
| Emitter type | LED | Laser | LED & Laser | Laser, Class I (FDA 21 CFR 1040.10 and 1040.11) | Laser, Class I (FDA 21 CFR 1040.10 and 1040.11) |
| Safety class | IEC 1 | FDA 1, IEC 1 | FDA 1, IEC 1 | FDA 21 CFR 1040.10 and 1040.11 | FDA 21 CFR 1040.10 and 1040.11 |
| Output power (dBm) | >-20* | 0** | >-20* @ 850 nm; >-20* @ 1300 nm 0 @ 1310; 0 @ 1550 nm | -5 (typical) into 9/125 fiber | -5 (typical) into 9/125 fiber |
| Stability | ± 0.1 dB over 8 hours | ± 0.05 dB over 1 hour ± 0.15 dB over 8 hours | ± 0.1 dB over 1 hour (MM port) ± 0.05 dB over 1 hour; ± 0.15 dB over 8 hours (SM port) | ± 0.05 dB over 1 hr, (after 15 min warm-up, after 30 sec typical) ± 0.1 dB over 8 hrs (after 15 min warm-up, after 30 sec typical) | ± 0.05 dB over 1 hr, (after 15 min warm-up, after 30 sec typical) ± 0.1 dB over 8 hrs (after 15 min warm-up, after 30 sec typical) |
| Wave ID transmit | yes | yes | yes | yes | yes |
| Available connector types | FC, SC, ST | FC, SC, ST, LC | FC, SC, ST, LC | SC standard, FC & ST available, LC optional | SC standard, FC & ST available, LC optional |
| Power | 2 x AA batteries, optional NiMH or AC | 2 x AA batteries, optional NiMH or AC | 2 x AA batteries, optional NiMH or AC | 2 x AA batteries, optional NiMH or AC | 2 x AA batteries, optional NiMH or AC |

* Output power will be approximately 3 dB less if a 50 µm mandrel-wrapped jumper is used instead of a 62.5 µm mandrel-wrapped jumper.

** Adjustable 2dB

Fiber Optic Loss Test Kits

To accommodate your fiber optic loss testing needs, Noyes offers a variety of multimode (MLP) test kits, single-mode (SLP) test kits, single-mode/multimode (SMLP) and Contractor Series (CK) test kits. These kits are ideal solutions for testing and certifying a range of networks such as LANs, WANs, IXC, CATV, and Telecom. Kits come complete with an adapter cap, software, download cable and instructions.



CKM 2 - Contractor Series Multimode Test Kit with Set Reference

Combining the CSM 2 optical power meter and CSS-MM Dual LED light source, the CKM 2 is a cost-effective test kit designed for performing insertion loss measurements on multimode fiber optic links.



CKSM 2 - Contractor Series Multimode & Single-mode Test Kit with Set Reference

Combining the CSM 2 optical power meter, CSS-MM Dual LED light source, and CSS-SM Dual LASER source, the CKSM 2 is a cost-effective test kit designed for performing insertion loss measurements on multimode as well as single-mode fiber optic links.

Fiber Optic Loss Test Kits



MLP 1 - Multimode Test Kit

The MLP 1 test kits are inexpensive solutions for testing multimode and single-mode systems. By joining the OPM 1 optical power meter and the OLS 1 optical light source, the MLP 1 is a great kit for beginners or network owners.



MLP 4-2 - Multimode Test Kit with Wave ID and Set Reference

The MLP 4-2 test kit offers accurate fiber optic testing at an affordable price. Combining the OPM 4-2D optical power meter and the OLS 1-Dual LED light source in a rugged carry case, the MLP 4-2 is a complete test kit for fiber optic LANs, and WANs.

Used during installations or maintenance, the MLP 4-2 performs insertion loss measurements on multimode fiber at 850 and 1300nm, as well as single-mode fiber at 1300nm. The OPM 4-2D optical power meter stores reference values at each wavelength for direct loss readings in dB.



MLP 5-2 - Multimode Test Kit with Wave ID, Set Reference and Data Storage

The MLP 5-2 test kit raises field testing to new standards by combining our popular OPM 5-2D optical power meter, and the OLS 1-Dual LED light source in a rugged carrying case. Used during installations, the MLP 5-2 performs insertion loss measurements on multimode fiber at 850 and 1300 nm, as well as measurements on single-mode fiber at 1300 nm.

The OPM 5-2D stores 500 loss readings for each wavelength. In addition, the OPM 5-2D will remeasure any specific memory location without erasing or modifying other loss readings. With the supplied PC software, saved test results can be transferred to a PC for storage, analysis, and printing.

Fiber Optic Loss Test Kits



SLP 4-6D Single-mode Test Kit with Wave ID and Set Reference

The SLP 4-6D test kit combines an OPM 4-4D optical power meter and an OLS 2-Dual LASER light source and is ideally suited for testing single-mode fiber optic networks. Used during installations, the SLP 4-6D performs insertion loss measurements on single-mode fiber at 1310 and 1550 nm.

The OPM 4-4D optical power meter stores reference values at each wavelength for direct loss readings in dB.



SLP4-7 & SLP4-FTTH Triple Wave Test Kits with Wave ID and Set Reference

The Triple wavelength single-mode test kits are available in two models, SLP4-7 or SLP4-FTTH. The SLP4-7 and SLP4-FTTH model combine the OPM 4-4D optical power meter with Wave ID - automatic wavelength identification and Set Reference feature and either OLS7 (1310/1550/1625 nm) or OLS7-FTTH (1310/1490/1550 nm) LASER source respectively.



SLP 5-6D Single-mode Test Kit with Wave ID, Set Reference and Data Storage

The SLP 5-6D test kit combines an OPM 5-4D optical power meter and the OLS 2-Dual LASER light source and is ideally suited for testing single-mode fiber optic networks. Used during installations, the SLP 5-6D performs insertion loss measurements on single-mode fiber at 1310 and 1550 nm.

The OPM 5-4D stores 500 loss readings for each wavelength. In addition, the OPM 5-2D will remeasure any specific memory location without erasing or modifying other loss readings. With the supplied PC software, saved test results can be transferred to a PC for storage, analysis, and printing.



SLP5-7 Triple Wave Test Kit with Wave ID, Set Reference, and Data Storage

The SLP5-7 test kit combines the OPM 5-4D optical power meter with Wave ID - automatic wavelength identification, Set Reference, and Data Storage feature and OLS7 (1310/1550/1625 nm) triple wavelength LASER source.

Fiber Optic Loss Test Kits



SMLP 4-4 Single-mode/Multimode Test Kit with Wave ID and Set Reference

The SMLP 4-4 test kit combines the OPM 4-2D optical power meter and OLS 4 integrated LED and LASER light source and is ideally suited for testing fiber optic networks with hybrid (single-mode and multimode) cables.

The OLS 4 features 850 nm and 1300 nm LED output from a multimode output port and 1310 nm and 1550 nm LASER output from a single-mode output port. This light source offers 4 modes of operation: Dual wavelengths sending ID, single wavelength sending ID, CW, and modulated Tone.

The OPM 4-2D measures loss results at 850 and 1300 nm for multimode fibers and 1310 and 1550 nm for single-mode fibers and stores reference values at each wavelength for direct loss readings in dB.



SMLP 5-5 Single-Mode/Multimode Test Kit with Wave ID, Set Reference and Data Storage

The SMLP 5-5 test kit combines the OPM5-2D optical power meter and OLS 4 integrated LED and LASER light source and is ideally suited for testing fiber optic networks with hybrid (single-mode and multimode) cables.

The OLS 4 features 850 nm and 1300 nm LED output from a multimode output port and 1310 nm and 1550 nm LASER output from a single-mode output port. This light source offers 4 modes of operation: Dual wavelengths sending ID, single wavelength sending ID, CW, and modulated Tone.

The OPM 5-2D measures and stores loss results at 850 and 1300 nm for multimode fibers and 1310 and 1550 nm for single-mode fibers. In addition, the OPM 5-2D will remeasure any specific memory location without erasing or modifying other loss readings. With the supplied PC software, saved test results can be transferred to a PC for storage, analysis, and printing.

Fiber Optic Loss Test Kits

Specifications

| MODEL | CKM 2 | CKSM 2 | MLP 1-2 | MLP 4-2 | MLP 5-2B | SLP 4-6D |
|---------------------------|---|---|---|---|---|--|
| Power Meter | CSM 2 | CSM 2 | OPM 1-2C | OPM 4-2D | OPM 5-2D | OPM 4-4D |
| Light Source | CSS-MM | CSS-MM, CSS-SM | OLS 1-2C | OLS 1-Dual | OLS 1-Dual | OLS 2-Dual |
| Fiber Type | MM | MM, SM | MM, SM | MM, SM | MM, SM | SM |
| Loss Measurements (nm) | 850, 1300 | 850, 1300 1310, 1550 | 850, 1300 | 850, 1300 | 850, 1300 | 1310, 1550 |
| Measurement Units | dB, dBm, μ W | dB, dBm, μ W | dBm | dB, dBm, μ W | dB, dBm, μ W | dB, dBm, μ W |
| Dynamic Range | 40 dB @ 850 nm ¹ 40 dB @ 1300 nm ¹ 40 dB @ 1310 nm ² 40 dB @ 1550 nm ² | 40 dB @ 850 nm ¹ 40 dB @ 1300 nm ¹ 60 dB @ 1310 nm ² 60 dB @ 1550 nm ² | 40 dB @ 850 nm ¹ 40 dB @ 1300 nm ¹ 22 dB @ 1300 nm ² | 40 dB @ 850 nm ¹ 40 dB @ 1300 nm ¹ 22 dB @ 1300 nm ² | 40 dB @ 850 nm ¹ 40 dB @ 1300 nm ¹ 22 dB @ 1300 nm ² | 50 dB @ 1310 nm ² 50 dB @ 1550 nm ² |
| Wavelength ID | — | — | — | yes | yes | yes |
| Available Connector Types | SC | SC | ST | SC, ST, FC | SC, ST, FC | SC, ST, FC |
| Set Reference | — | yes | — | yes | yes | yes |
| PC Software & Storage | — | — | — | — | yes | — |

| MODEL | SLP4-FTTH | SLP4-7 | SLP 5-6D | SLP5-7 | SMLP 4-4 | SMLP 5-5 |
|---------------------------|---|---|--|---|---|---|
| Power Meter | OPM 4-4D | OPM 4-4D | OPM 5-4D | OPM 5-4D | OPM 4-2D | OPM 5-2D |
| Light Source | OLS7-FTTH | OLS7 | OLS 2-Dual | OLS7 | OLS 4 | OLS 4 |
| Fiber Type | SM | SM | SM | SM | MM, SM | MM, SM |
| Loss Measurements (nm) | 1310, 1490, 1550 | 1310, 1550, 1625 | 1310, 1550 | 1310, 1550, 1625 | 850, 1300 1310, 1550 | 850, 1300, 1310, 1550 |
| Measurement Units | dB, dBm, μ W | dB, dBm, μ W | dB, dBm, μ W | dB, dBm, μ W | dB, dBm, μ W | dB, dBm, μ W |
| Dynamic Range | 45 @ 1310 nm ² 45 @ 1490 nm ² 45 @ 1550 nm ² | 45 @ 1310 nm ² 45 @ 1550 nm ² 45 @ 1625 nm ² | 50 dB @ 1310 nm ² 50 dB @ 1550 nm ² | 45 @ 1310 nm ² 45 @ 1550 nm ² 45 @ 1625 nm ² | 40 dB @ 850 nm ¹ 40 dB @ 1300 nm ¹ 60 dB @ 1310 nm ² 60 dB @ 1550 nm ² | 40 dB @ 850 nm ¹ 40 dB @ 1300 nm ¹ 60 dB @ 1310 nm ² 60 dB @ 1550 nm ² |
| Wavelength ID | yes | yes | yes | yes | yes | yes |
| Available Connector Types | SC | SC | SC, ST, FC | SC | SC, ST, FC | SC, ST, FC |
| Set Reference | yes | yes | yes | yes | yes | yes |
| PC Software & Storage | — | — | yes | yes | — | yes |

1 On 62.5/125 μ m multimode fiber

2 On 9/125 μ m single-mode fiber

Other test kit configurations available.

Fiber Optic Inspection Microscopes

Fiber inspection scopes are used to inspect optical fiber connectors for scratches, dirt, pits, or other problems normally associated with poor transmission performance. By using threaded adapter mounts, Noyes fiber scopes can inspect the fiber and surrounding ferrule of virtually any connector style. Three models, the VFS 1, OFS 300, and VS 300 are available for various applications.



OFS 300 Optical Microscope for Fiber Optic Connectors on Patch Cords

The OFS 300 optical microscope is designed to inspect connectors on fiber optic cables, patch cords, or test jumpers. Two versions of the OFS 300 offer different magnification power. The OFS 300-200C, with 200X magnification, is our most popular fiber scope for inspection of multimode or single-mode fibers. The OFS 300-400C, with 400X magnification, is ideal for critical inspection especially of single-mode fibers. Both models offer 60 hours of continuous battery life. A low battery indicator will flash when approximately 8 hours of optimum brightness remains, reducing the risk of eyestrain.



VS 300 View Safe Video Microscope for Fiber Optic Connectors on Patch Cords

The VS 300 view safe video microscope removes concerns for eye safety while inspecting optical fiber connectors. The design eliminates the optical path to the eye by utilizing a miniature camera and a state-of-the-art micro-display that achieves unparalleled clarity and resolution.

The VS300 is modeled after the functionality of our highly successful OFS300 product line with the following improvements:

- The VS300 has no optical path to the user's eye.
- The VS300 has NTSC video output.
- The VS300 has the familiar shape and control positions of the OFS 300 but is half the weight and has a molded easy grip case with easy access battery compartment.

The VS 300 Video Fiber Scope uses all the OFS 300 -200C adapter caps and has an energy saving automatic shutoff.

Specifications

| MODEL | OFS 300-200C | OFS 300-400C | VS 300 |
|------------------------|---------------|---------------|---|
| Normal Magnification | 200x | 400x | 400x |
| Adapter Mount | Thread-on | Snap-on | Thread-on |
| Infrared Safety Filter | Schott KG3 | Schott KG3 | not required - no optical path to laser |
| Power | 2 AA Alkaline | 2 AA Alkaline | 2 AA Alkaline |

Video Fiber Scopes



Features

- Unparalleled access to connectors and bulkhead adaptors
- One-handed operation
- Resolves 3/4 micron scratches
- Precision adaptor tips for easy centering
- 350-micron field of view (diagonal)
- Smooth, precision focusing (left or right handed)
- Advanced lithium ion battery

VFS 2 Video Fiber Scope 2nd Generation

The VFS 2 is a small extremely versatile video fiber scope, which retains the superior image quality associated with Noyes inspection products. The unique “optical-knuckle” allows the user orient the probe head in virtually any direction. This feature allows the user to view connectors that may be located in tight or difficult locations. With a probe head length of less than 8 cm (3.25”), access into crowded/cramped quarters becomes a reality.

The VFS 2 resolves 3/4 micron scratches, keeping with our standard of quality end-face images. The unit is designed for one-handed operation and with the “optical-knuckle” feature, the unit is equally easy for both right and left handed individuals. New precision adaptor tips put the fiber in the viewing area right away. These tips ensure the optics will view into the alignment sleeve, thereby simplifying centering the fiber.

The VFS 2 probe may be paired with the VFS 2 high-resolution 3.5” display unit, which features advanced lithium ion battery and charger technology for long, continuous operating times.

Specifications

Optical Specifications

| PARAMETER | VALUE |
|---------------|---|
| Field of view | 350 microns diagonal (208 microns vertical, 285 microns horizontal) |
| Magnification | 250x on 3.5” display, 350x on 5” display |
| Resolution | 3/4 micron scratch |
| Video Output | NTSC |

VFS 2 Probe Specifications

| PARAMETER | VALUE |
|--|--|
| Operating temperature | 0 to +50°C |
| Storage temperature | -20 to +60°C |
| Humidity | 0 to 90% (non-condensing) |
| Probe weight | 0.4 lb (0.2 kg) |
| Probe body size (L x W x D) | 6.3 x 1.3 x 1.3 in (15.9 x 3.3 x 3.3 cm) |
| Probe head size (with FC adapter), (L x W x D) | 3.1 x 1.0 x 0.6 in (7.9 x 2.5 x 1.5 cm) |

VFS 2 Display Specifications

| PARAMETER | VALUE |
|---|---|
| Display Screen Size | 3.5 inch TFT NTSC |
| Display package with protective boot size | 9.0 x 2.0 x 4.7 in (22.9 x 5.1 x 11.9 cm) |
| Weight | 2 lb (0.9 kg) |
| Power | Li-Ion battery pack or AC adapter |
| Battery life with VFS2 probe | > 4 hours |
| Operating temperature | 0° to 50° C |
| Storage temperature | -20 to +60°C |
| Humidity | 0 to 90% RH non-condensing |
| Li-Ion battery pack charging temperature | -10 to +45°C |
| Li-Ion battery pack recharging | 4 hours |

VCP 1 USB Video Capture Port



Fiber end images displayed on a PC



VCP 1

System Requirements

- A 400 MHz (or faster) PC or laptop with USB 1.1 or better
- At least 800 x 600 SVGA display
- Windows 2000 or XP
- At least 128 MB of RAM
- A CD-ROM drive

The VCP 1 Video Capture Port is an interfacing module that provides high-speed composite video signal to a digital format conversion for capturing and displaying video data on a PC. The VCP 1 simply attaches via a standard USB connector to your computer and offers “plug and play” installation.

When used in conjunction with the VFS 2 probe or VS 300 video microscope, the VCP 1 Video Capture Port allows you to inspect fiber optic end-faces and capture viewed images on your computer. With the supplied easy-to-use Windows software, fiber end images can be saved and organized for analyzing, printing, and archiving.

The VCP 1 front panel includes the video capture button - [Snap Shot] for single shot video capture and the [Active] LED, which indicates that the unit is operating.

Batteries or an AC adapter are not required; the VCP 1 power is supplied via the USB connection. The VCP 1 is ideal for laptop or desktop use. The VCP 1 package Includes: VCP 1 unit, CD-ROM with driver and software, and user’s guide.

Features

- Compact size
- Captures fiber end images directly into your computer
- Includes Includes “Video Capture” - Windows®-based software
- Converts analog video signal from Noyes RJ11 input to digital via USB A plug
- Supports NTSC or PAL system
- No battery - no need to install batteries or run off the AC adapter
- Low power consumption
- A single snap shot button takes still images at VGA resolution (640 x 480 pixels)
- Low CPU utilization at decompression
- Plug and play installation

Specifications

| PARAMETER | VALUE |
|--------------------------|---|
| Interface type | USB |
| Operating system | Windows 2000 and XP |
| Video input | Noyes RJ11 connector |
| Output | USB Standard (VCP 1 is a Twain compatible device using supplied software) |
| Analog video format | NTSC or PAL |
| Video capture resolution | 640 x 480 pixels |
| Snap shot | Single button to capture still images at 640 x 480 pixels |
| Video capture format(s): | JPEG |
| Power source | 5VDC @500 mA (max) through USB port to 6 foot cord |
| USB data bandwidth | 4Mbps - 8Mbps isochronous |
| Weight | 0.25 lb (0.11 kg) |
| Size (L x W x D) | 4.0 x 2.2 x 1.0 in (10.2 x 5.6 x 2.5 cm) |


Visible Laser Sources



VFI 2

HiLite & VFI2

The HiLite and VFI 2 are compact but powerful visible red laser sources designed to troubleshoot faults on fiber optic cables. Light generated by these units will escape from sharp bends and breaks in jacketed or bare fibers, as well as poorly mated connectors. They can identify faults in fiber optic jumper cables, distribution frames, patch panels, and splice trays. The HiLite and VFI 2 are an excellent complement to an OTDR because they can locate faults inside the OTDR's dead-zone. Other applications include end-to-end continuity checks, identifying connectors in patch panels and fibers during splicing operations. The universal connector interface provides fast operation with many connector styles without changing an adapter.

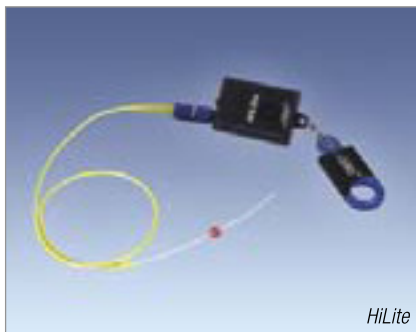

HiLite

MT Tracer (12-Fiber VFI and Display)

The MT Tracer is a compact multi-fiber visual fault identifier (red laser source) supporting 8 or 12 fiber MTP® connections. The user simply connects the 12-fiber cable directly to the unit. Fibers can be tested individually or all at once. By progressing sequentially through the fibers, cables can be quickly checked for polarity by verifying the proper order at the output. The MT Tracer Display is a passive optical device designed to receive the light from the MT Tracer Source and provide an eye-safe method of viewing the red light. Identification is accomplished by expanding the output of the MT ferrule to a large easy to read panel - large enough to be read from several feet away.



MT Display

MT Tracer

Specifications

| MODEL | VFI 2 | HILITE | MT TRACER SOURCE |
|---|------------------|------------------|------------------|
| Wavelength | 650 nm | 650 nm | 650 nm |
| Optical Output Power (into Single-mode fiber) | 1 mW, 2 Hz or CW | 1 mW, 2 Hz | 1 mW, 2 Hz or CW |
| Emitter Type | Laser | Laser | Laser |
| Safety Class | FDA 2, IEC 2 | FDA 2, IEC 2 | FDA 2, IEC 2 |
| Connector Type | Universal 2.5 mm | Universal 2.5 mm | MTP® |
| Power | 2 AA | 1 AAA Alkaline | 2 AA |
| Battery Life | 60 hrs. | 4 hrs. | 40 hrs. |

Fiber Optic Talk Sets



FTS 1

Fiber Optic Talk Sets are an inexpensive solution to meet your communication needs when testing multimode or single-mode fiber optic cables. Designed for voice communication over spare fibers, they provide full duplex, hands-free operation. Ease of use and compact size allow the operators to focus on the task at hand, rather than operating the talk set.

Two talk set models are available, the FTS 1 for communication on single-mode or multimode fiber and the FTS 2 for long-range single-mode applications. The FTS 2 model includes a multiparty communication feature, which provides the connection of two talk sets at a common site to extend the range or to include three or more persons in the conversation.


A clip-on coupler is available for bare fiber access where terminated ends are not available. The FTS-20C allows bi-directional communication from a center point on the fiber link or from an unterminated end. When used with a fiber talk set – such as the FTS2 – a user can access the intended talk fiber at a mid-point across the span, usually at the splice enclosure. The FTS-20C can also be used in conjunction with a Laser Source and Tone Detector to inject or detect 2 kHz test tones. It works at 1310, 1550, or 1625 nm. Coupling efficiency is approximately 18 dB.



FTS 2

Specifications

| MODEL | FTS 1-2 | FTS 2-1310 | FTS 2-1550 |
|-------------------------|---------------|---------------|---------------|
| Wavelength | 1300 nm | 1310 nm | 1550 nm |
| Fiber Type | MM, SM | SM | SM |
| Dynamic Range (MM / SM) | 12 dB / 20 dB | 45 dB | 45 dB |
| Output | Class I | | |
| Connector Type | FC, SC, ST | | |
| Power | 9V or AC | 4 AA Alkaline | 4 AA Alkaline |
| Features | | | |
| One Fiber | Yes | | |
| Digital Modulation | Yes | | |
| Multiparty | No | Yes | Yes |

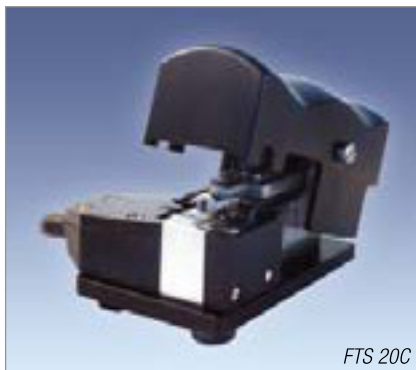

FTS 20C

Accessories

| MODEL | DESCRIPTION | FTS 1 | FTS 2 |
|--------------|--|-------|-------|
| 4050-00-0111 | AC Adapter 90-264 VAC / 9 VDC (specify power cord) | • | • |
| 8500-10-0900 | FTS-20C Clip-on Coupler | | • |

Fiber Optic Attenuators



SVA 1 Single-Mode Variable Attenuator

The SVA 1 Single-mode Variable Attenuator advances fiber optic field testing by offering superior performance in a low cost hand-held package. Utilizing a simplified, industry accepted attenuation technique, the innovative design of the SVA 1 offers superior resolution across the entire 60 dB dynamic range.

Intended for field testing during installation, new equipment turn-ups, or routine maintenance, the SVA 1 is a complete, easy to use attenuator. Its unique features allow bidirectional signal transmission with no loss penalty.



VOA 5 Variable Fiber Optic Attenuator

The VOA 5-MM (multimode) and VOA 5-SM (single-mode) are hand-held, field-rugged variable optical attenuators suited for a wide range of fiber link certification and production test applications. The VOA 5 can be operated under local control (front panel keypad) or from a PC via a serial link using the supplied PC software. The VOA 5 offers high bi-directional return loss and will maintain the set attenuation level when the unit is powered down.

Specifications

| MODEL | VOA 5 MM | VOA 5 SM | SVA 1 |
|----------------------|--|--|--------------------|
| Wavelengths or Range | 850 & 1300 nm | 1310 & 1550 nm | 1250 - 1650 nm |
| Fiber Type | MM (62.5 μm) | SM (9 μm) | SM (9 μm) |
| Insertion Loss | 1.5 dB @ 850 nm 3.0 dB @ 1300 nm | 2 dB | < 1.5 dB @ 1310 nm |
| Attenuation Range | 0 to 30 dB | 0 to 60 dB | 0 to 60 dB |
| Return Loss | 18 dB | 40 dB | 50 dB |
| Connector Type | FC, SC, ST | FC, SC, ST | FC, SC |
| Power | 2 AA Alkaline or AC Adapter or NiMH (optional) | 2 AA Alkaline or AC Adapter or NiMH (optional) | N/A |



OFI 200



OFI 400

OFI Optical Fiber Identifiers

Noyes Optical Fiber Identifiers are rugged, handheld, and easy-to-use fiber optic test instruments designed to detect optical signals transmitted through a single-mode fiber without disrupting traffic. During installation, maintenance, rerouting, or restoration; it is often necessary to isolate a specific fiber. By simply clamping an Optical Fiber Identifier onto a gently bent fiber, the unit will indicate if there is [No Signal], [Tone], or [Traffic] and identify signal direction.

The OFI 200 model and OFI 400 model Identifiers are equipped with a unique two-position head design that can be configured to work with 250 μm , 900 μm , ribbon, or jacketed fiber in seconds, without tools or adjustments. When testing coated fibers, the slim design of the OFI 200 and OFI 400 models allows easier access on a splice tray where the amount of work space is limited. The clamping trigger is ergonomically designed to fit the natural motion of the operator's hand. A high impact molded plastic case makes the OFI models suitable for use outside plant or in the central office.

The OFI 400 model is the next generation of Noyes Optical Fiber Identifiers. It has all the features of the OFI 200 model plus easy-to-read LCD display with Backlight, multiple [TONE] signal detection (270 Hz, 330 Hz, 1 kHz, or 2 kHz), power saving feature, and [Set Reference] feature. The OFI 400 model also measures and displays fiber core power or relative power on an LCD display. Both models are battery operated with the battery indication feature and perform thousands of tests before batteries replacement is necessary.

Applications

- Live fiber identification - used during installation, maintenance, rerouting, or restoration to positively identify fibers prior to cutting and splicing
- Tone detection
- The OFI 400 models may also be used for measuring core power or relative power

Features

(OFI 200 and OFI 400 models)

- Rugged, handheld, lightweight
- Accepts 250 μm and 900 μm coated fiber, 3mm jacketed fiber cable, and ribbon fiber
- No head swapping or adjustments
- Identifies light carrying fiber
- Low insertion loss - traffic remains uninterrupted
- Indicates direction of traffic
- Indicates Tone signal visually and audibly
- Battery operated
- Low battery indication

(OFI 200 model)

- 2kHz Tone detection - OFI 200 models

(OFI 400 model)

- 270Hz, 330Hz, 1kHz, 2kHz Tone detection
- Easy-to-read LCD display with Backlight
- Measures fiber core or relative power
- Power Off and Set Reference feature

OFI Optical Fiber Identifiers - continued

Ordering Information

| MODEL | INCLUDES |
|----------|-----------------------------|
| OFI 200D | User's guide and carry case |
| OFI 400 | User's guide and carry case |

Specifications

DETECTABLE SIGNAL RANGE

| FIBER TYPE | PARAMETER | WAVELENGTH, SIGNAL | OFI 200D | OFI 400 |
|---|--|------------------------|----------|---------|
| 250 µm coated fiber (SMF-28 with 250 µm CPC6 coating) | Minimum detect level (average power, typical) | 1310 nm, CW or Traffic | -40 dBm | -45 dBm |
| | | 1310 nm, Tone | -43 dBm | -45 dBm |
| | | 1550 nm, CW or Traffic | -45 dBm | -50 dBm |
| | | 1550 nm, Tone | -50 dBm | -50 dBm |
| Insertion loss (typical) | 1310 nm | 0.6 dB | 0.6 dB | |
| | 1550 nm | 2.5 dB | 2.5 dB | |
| 3 mm jacketed fiber (SMF-28 with 250 µm CPC6 coating and 3 mm, yellow jacket) | Minimum detect level (average power, typical) | 1310 nm, CW or Traffic | -30 dBm | -30 dBm |
| | | 1310 nm, Tone | -32 dBm | -30 dBm |
| | | 1550 nm, CW or Traffic | -33 dBm | -33 dBm |
| | | 1550 nm, Tone | -37 dBm | -33 dBm |
| Insertion loss (typical) | 1310 nm | 0.8 dB | 1.0 dB | |
| | 1550 nm | 2.5 dB | 2.8 dB | |

OPTICAL SPECIFICATIONS

| MODEL | OFI 200D | OFI 400 |
|---|--|---|
| Detector type | InGaAs | |
| Wavelength range | 800 - 1700 nm | |
| Calibrated size of fiber and wavelength | N/A | 250 µm (SMF-28) @1550 nm |
| Fiber stress | <100 kPSI max | |
| Fiber size | 250 µm, 900 µm, 2 mm or 3 mm jacketed & ribbon fiber | |
| Tone detection | 2000 ±100Hz | 270, 330, 1000, or 2000 Hz (±5%) |
| Core power measurement range | N/A | +13 dBm to - 50 dBm SMF28/28E 250µm @ 1550nm |
| Measurement units | N/A | dBm, dB |

GENERAL SPECIFICATIONS

| | | |
|------------------------|---|--|
| Display Type | N/A | Multi 7 segment LCD; 3 LEDs; 1 piezo buzzer |
| Power | 1 x 9V Alkaline | 2 x 1.5V Alkaline |
| Battery life | >10,000 operations typical | >10,000 operations typical |
| Operation temperature | 0° to 50°C 90% RH (Non-condensing) | |
| Storage temperature | -30 to +60°C 90% RH (Non-condensing) | |
| Dimensions (H x W x D) | 8.5 x 1.5 x 1.1 in. (22 x 3.8 x 2.8 cm) | |
| Weight | 7.5 oz. (210 g) | 6 oz (168 g) |

Notes

- 250 µm coated fiber parameters are specified with OFI plunger in the "250/900/RIB" position.
2mm/ 3mm jacketed fiber parameters are specified with OFI plunger in the "2 mm/ 3 mm" position.
- Unless noted otherwise, all specifications are typical. Actual results can vary by several dB depending on fiber type, coating material, jacket color, jacket hardness, and other factors.
All specifications stated above are as measured at 25°C.
- [CW] is a light signal that is not modulated.
[Traffic] is a light signal modulated by a random data sequence.
[Tone] is a light signal modulated into a nominal 50% duty cycle square wave.

FCP1 Fiber Cleaning Pack



AFL Telecommunications offers a complete selection of Noyes brand fiber optic cleaning kits for field cleaning of connector end faces in fiber frames, adapters and on jumpers. Using our exclusive FCC2 non-hazardous cleaning fluid and CCT molded cleaning tips, the FCP1 Series of kits delivers compact, safe, easy to use, reliable cleaning for all types of fiber optic connector end faces including Military and Multiple Fiber Ferrule designs. A wide variety of pre-stocked kits make ordering easy. Choose from the following standard kits or call us at 800-321-5298 for a custom kit to meet your application needs. Each kit consists of a wall or rack mountable carry case, FCC2 cleaning fluid, and color-coded instructions.

Ordering Information

A wide variety of pre-stocked kits make ordering easy. Choose from the following standard kits or call us at 800-321-5298 for a custom kit to meet your application needs. Each standard kit consists of a wall or rack mountable carry case, FCC2 cleaning fluid, and color-coded instructions.





Choose from the following to fill a pack that's right for you

| APPLICATION | CLEANING MATERIALS | DESCRIPTION |
|---|----------------------------|--|
| For cleaning connector end-faces within alignment sleeves (bulkhead adaptors, female socket connectors) | FCC2 | Optical quality cleaning fluid |
| | CCTS-25 | 2.5mm cleaning tips for FC, SC, ST type standard connectors |
| | CCTS-12 | 1.25mm cleaning tips for LC, MU type small form factor connectors |
| | CCTS-16 | 1.6mm cleaning tips for 2.0mm and 1.6mm termini in military connectors and D4 connectors |
| For cleaning ferrule end-faces that are exposed (jumpers and patch cords) | FCC2 | Optical quality cleaning fluid |
| | Cletop | Reel type cleaner |
| | CCTP-25 | Universal cleaning tip for exposed ferrule and termini end-faces on jumpers or military connectors |
| For cleaning alignment sleeves | FCC2 | Optical quality cleaning fluid. |
| | ACT01 | 2.5mm swabs for FC, SC, ST type standard connectors |
| | ACT02 | 1.25mm swabs for LC, MU type small form factor connectors |
| | Cletop Stick-Type | 2.0mm swabs for D4 connectors |
| Additional options | Canned air | For cleaning work area |
| | VS 300 | Optical or video microscope for end-face inspection |
| | OFS 300-200 OFS 300-400 | |

See individual data sheets for specification on individual supplies.



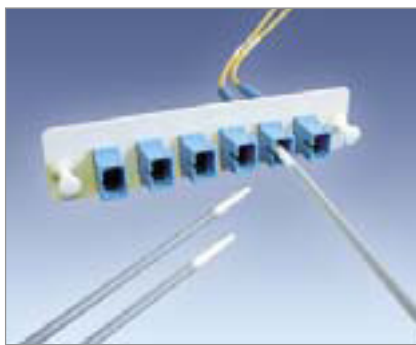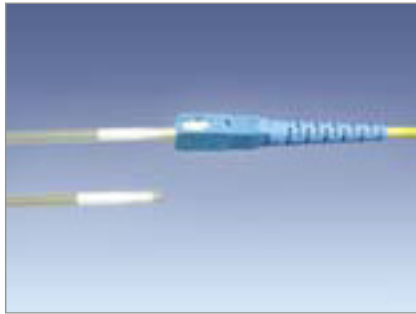

CCT - Connector Cleaning Tips

Noyes Test & Inspection is pleased to offer a unique technology in fiber connector end-face cleaning. Rather than a fabric-covered or foam-covered stick, we are offering a molded cleaning tip that will trap contamination and wick cleaning solvents from bulkhead connectors. This new cleaning tip is a molded, sintered polymer that is both porous and pliable conforming to virtually any fiber end-face polish geometry while trapping and absorbing contaminants.

Applications

- Dual-head design permits wet and dry cleaning in one swab
- Solvent and chemical resistant, not physically altered by solvent contact
- Designed to work with Noyes FCC2, Fiber Connector Cleaner
- Most connectors cleaned the first time

Tip Configurations

- Cleaning tip exposed for cleaning ferrule end-faces in alignment sleeves that are recessed within sockets or bulkhead adaptors
- Also available with cleaning tip recessed in the "straw" for cleaning exposed ferrules and termini (jumpers)

Ordering Information

Cleaning tips are available for most common commercial and Mil Spec ferrule sizes.

Features

- Molded sintered polymer construction assures perfect bulkhead fit and consistent performance with each cleaning tip
- No fibers, binders, adhesives or outgassing that may contaminate the connector
- Traps and holds liquid and particle contaminants in an absorbent open cell matrix ranging from 10-25 microns
- The elastic cleaning head enhances entrapment of particles and oils, while allowing the tip to conform to virtually any fiber end-face geometry (8 degree, domed polish, etc.)
- Very absorbent
- US and Foreign patents pending

| SIZE (diameter of ferrule or termini) | TYPE (Pin - for exposed ferrules and termini Socket - for ferrules and termini in alignment sleeves) | PART NUMBER | COMMENTS |
|--|--|--------------|---|
| 2.5 mm | Pin | CCTP-25-0900 | Examples: SC, ST, FC, etc. |
| 2.5 mm | Socket | CCTS-25-0900 | Examples: SC, ST, FC, etc. |
| 2.0 mm | Pin | CCTP-25-0900 | Mil T 29504/14 For Mil C 28876 |
| 2.0 mm | Socket | CCTS-16-0900 | Mil T 29504/15 For Mil C 28876 |
| 1.6 mm | Pin | CCTP-25-0900 | Mil T 29504/04 For Mil C 38999 |
| 1.6 mm | Socket | CCTS-16-0900 | Mil T 29504/05 For Mil C 38999 |
| 1.25 mm | Pin | CCTP-25-0900 | Examples: LC, MU |
| 1.25 mm | Socket | CCTS-12-0900 | Examples: LC, MU |
| MT ferrule | Pin | CCTX-MT-0900 | Examples: MTP [®] *, MPX [®] ** |
| MT ferrule | Socket | CCTX-MT-0900 | Examples: MTP [®] *, MPX [®] ** |

* Registered Trademark of US Conec Ltd.

** Registered Trademark of TYCO Electronics Corp.

* This product is manufactured exclusively for Noyes Fiber Systems by Micro Care Corporation, a world leader in cleaning products.



FCC2 Fiber Connector Cleaner

FCC2 is a non-flammable, environmentally safe, residue free solvent engineered to clean fiber connector end-faces. Offering excellent cleaning on particulate, fingerprint oils, salts and other residues, this product is exclusively produced for Noyes Test & Inspection by Micro Care Corporation, a world leader in cleaning solvents.

Safety

- Ozone Safe, Environmentally Safe, US EPA SNAP approved
- Nonflammable
- Plastic safe
- NFPA: Health =1, Flammability =0, Reactivity =1
- Not Hazardous/Not Regulated for all modes of transport including air-cargo

Features

- High purity cleaning fluid is double-filtered to .2 microns
- Unlike alcohol, this cleaning fluid quickly dries without a residue
- Faster drying than Isopropyl alcohol
- Solvent is “heavy” and therefore floats particles and contaminants from ferrule surfaces
- Dissolves light oils, salts, grime and uncured epoxies and is especially effective when used with an appropriate mechanical wipe (Noyes Connector Cleaning Tips)
- Electrically conductive, it neutralizes “Particle Cling”, by releasing ionic bonds that often hold contaminants to the end-face
- Mildly hygroscopic, it will absorb small amounts of water and dissolve light water-based oils
- US and Foreign patents pending



Right Container

- Non-aerosol/Non-pressurized metered pump dispenser (140 micro-liters per stroke)
- Gasketless dispensing valve eliminates elastomer oil contamination found in aerosols
- Hermetically sealed container makes it impossible to contaminate solvent, assuring that clean, pure cleaning fluid is dispensed with every spray
- Compact size fits easy in the hand, and makes it easy to fit in tool kits, instrument cases and inspection packages
- The unique “Spray Tube Holder” makes it easy to saturate cleaning tips with precise doses of cleaning fluid, assuring minimal waste
- Individual containers also come with a removable 3-1/2 inch (9cm) extension spray tube for precision application of cleaner in tight spaces
- This unique dispenser with new state-of-the-art solvent allows users to easily dispense precise doses of pure, optical-quality cleaning fluid. This makes it easy for process engineers to specify a precise, reliable and repeatable cleaning process for all types of fiber optics connectors, in any location and any environment.



FPF1 – Fiber Preparation Fluid

FPF1 is a non-flammable, environmentally safe, solvent engineered to clean fibers after stripping, before fusion splicing or field termination. This product is exclusively produced for Noyes Test & Inspection by Micro Care Corporation, a world leader in cleaning solvents.

Safety

- Ozone safe, environmentally safe, US EPA SNAP approved
- Rugged, spill proof dispenser
- Nonflammable
- Not Pressurized
- Excellent materials compatibility; safe on metals, glass, cured epoxies and plastics
- NFPA Health = 1, Flammability = 0, Reactivity = 1
- Not Hazardous/Not Regulated for all modes of transport including air-cargo
- Eliminates HAZMAT waste disposal expenses
- May reduce insurance costs

Features

- High purity cleaning fluid is double filtered to 0.2 microns for consistent cleaning performance
- Dries without a residue
- Low odor
- Can be shipped with the fusion splicer anywhere, any method
- No need to stop and purchase IPA on the way to the job site
- Works better than alcohol without the drawbacks
- No retraining required – Fluid is engineered to provide the same familiar “squeak” when fiber is clean
- ESD Safe, quickly reduces local static buildup
- Hermetically sealed container, impossible to contaminate
- Multifunctional, also safe and effective for cleaning electrical contacts and electronic assemblies
- U.S. and Foreign Patents Pending

Instructions for use

- 1 Wet lint-free fabric by spraying FPF1 cleaning fluid two or three times.
- 2 Fold wet fabric over the glass strand(s), firmly pinch and slide the glass strands through the fold (toward the cleaved end).
- 3 Glass strands are clean when the wetted fabric “squeaks” when performing step #2.