

# CEYEAR 4051 A/B/C/D/E-S

## Signal / Spectrum Analyzer

3Hz~4GHz / 9GHz / 13.2GHz / 18GHz / 26.5GHz



## QUICK OVERVIEW

- Spectrum analyzers with a frequency range of up to 3 kHz...67 GHz
- Standard and economy models -S
- Variety of optional features, for example preamp

## PRODUCT OVERVIEW

**4051-S Series Signal/Spectrum Analyzers** support incomparable spectrum measurement services of high price-performance ratio. The analyzers have excellent dynamic range, phase noise, amplitude precision and measurement speed, can supply ten measurement functions in total including high-performance spectrum analysis, standard power measurement modules conforming to relevant criteria etc. Capabilities of the analyzers can be greatly augmented. Multiple practical options are available like preamplifier, phase noise measurement, random IF output and so on. 4051 Series can be widely applied in signal and instrument tests relating to fields of aerospace, communication, EMC, radar detection, navigation, etc.

## MAIN CHARACTERISTICS

### INCOMPARABLE PRICE-PERFORMANCE RATIO


- Economy price effectively reduce testing cost
- Offer outstanding performance and specifications which can only be provided by high end analyzers

### 5 FREQUENCY RANGE, UP TO 26.5 GHz

- The max. coaxial frequency range of 26.5GHz
- 5 frequency ranges available, you can choose based on budgets
- Can supply broadband preamplifiers to match different frequency range

### EXCELLENT MEASUREMENT AND RECEIVING PERFORMANCES

- 1GHz testing DANL is -153dBm/Hz. If configured with preamplifier, the typical value is -166dBm/Hz.
- 26.5GHz testing DANL is -141dBm/Hz,configured with preamplifier, the typical value is -160dBm/Hz.
- All digital IF design, fine scale fidelity and IF error rate

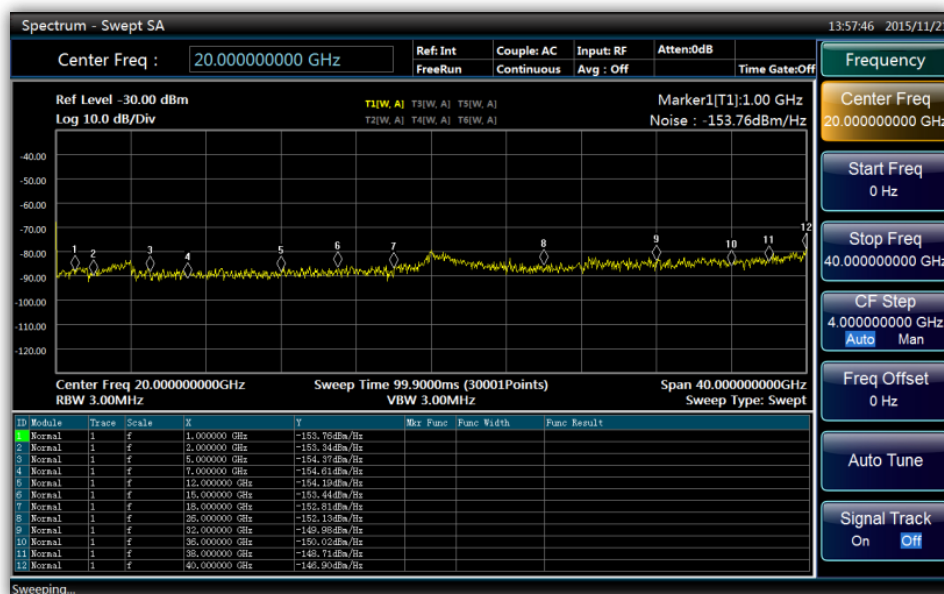

### OVERALL SPECTRUM ANALYSIS CAPABILITIES

- Support frequency sweep and FFT sweep
- Zero frequency band fast sweep, the fastest sweep time is 1μs
- Accurate frequency counting, counting resolution can be 0.001Hz
- Sweep points numbers can be arbitrarily selected among 101~30001
- 6 traces can be configured, with abundant marker operation functions
- 6 detector modes, 3 average types.
- Support time gate measurement
- Occupied bandwidth, channel power, adjacent channel power measurement functions
- Measurement functions of power statistics, burst power, harmonic distortion, TOI, spurious emission, etc.



## PRACTICAL FUNCTION OPTIONS

- Phase noise testing capability
- RF or full band preamplifiers
- 10MHz~160MHz random IF output, 1Hz steps, 4 auto gain control levels



## CONVENIENT OPERATION CHARACTERISTICS

- Chinese/English are available
- Humanized automatic tuning and automatic scale
- One-button measurement
- 10.1 inch LCD, 1280\*800 screen resolution, display more clear measurement results
- Support USB, LAN, GPIB, monitor etc., for your convenience.

## TYPICAL APPLICATIONS

- RF performance assessment of electronic systems: as universal spectrum analyzers of multiple functions, 4051-S Series Signal/Spectrum analyzers can be widely used in RF performance evaluative of electronic systems in fields like radar, communication and so on. They can provide high sensitivity, wide dynamic range, and high precision and efficiency resolutions.
- Measurement and diagnosis of transmitter and receiver: 4051-S Series can furnish comprehensive common diagnosis services for transmitter and receiver by the multiple functions of spectrum analysis, spectral power testing, and phase noise Measurement and so on.
- Can be directly used for the integration of complex test and diagnosis systems, to get test results of spectrum characteristics and signal output.

## TECHNICAL SPECIFICATIONS

Model	4051A-S	4051B-S	4051C-S	4051D-S	4051E-S	
<b>Frequency Range</b>	DC coupled	3Hz~4GHz	3Hz~9GHz	3Hz~13.2GHz	3Hz~18GHz	3Hz~26.5GHz
	AC coupled	10MHz~9GHz	10MHz~13.2GHz	10MHz~18GHz	10MHz~18GHz	10MHz~26.5GHz
<b>10MHz Precision Frequency Reference</b>	Frequency accuracy: $\pm(\text{last calibration time} \times \text{aging rate} + \text{temp stability} + \text{calibration accuracy})$ Aging rate: $\pm 1 \times 10^{-7}/Y$ Temperature stability: $\pm 1 \times 10^{-8}$ (20°C ~ 30°C) $\pm 5 \times 10^{-8}$ (0°C ~ 50°C) Calibration accuracy: $\pm 4 \times 10^{-8}$					
<b>Frequency Readout Accuracy</b>	$\pm(\text{Frequency readout} \times \text{frequency reference accuracy} + 0.1\% \text{ span} + 5\% \text{ resolution bandwidth} + 2\text{Hz} + 0.5 \text{ horizontal resolution}^*)$ *: Horizontal resolution = span / (sweep points-1)					
<b>Frequency Counting Accuracy</b>	$\pm(\text{Frequency readout} \times \text{frequency reference accuracy} + 0.1\text{Hz})$					
<b>Span</b>	Range: 0Hz (zero span), 10Hz~the max. frequency range of this model Accuracy: $\pm(0.1\% \times \text{span} + \text{span} / (\text{sweep points}-1))$					
<b>Sweep Time Range</b>	span $\geq 10\text{Hz}$ : 1ms~6000s span =0Hz: 1 $\mu$ s~6000s					
<b>Resolution Bandwidth</b>	Range: 1Hz~3MHz (1, 2, 3, 5 steps) 4, 5, 6, 8, 10, 20MHz Conversion uncertainty: 0.3 dB 1Hz~10MHz; 1.0dB 20MHz					
<b>Video Bandwidth</b>	1Hz~3MHz (1, 2, 3, 5 steps) 4, 5, 6, 8, 10, 20MHz (nominal)					
<b>Trigger Source</b>	Free, Line, Video, External Level (front panel), External Level (rear panel), Burst RF, Timer					
<b>Trace Detector</b>	Normal, Positive Peak, Negative Peak, Sample, Video Average, Power Average, Voltage Average					
<b>Average Mode</b>	Video Average, Power Average, Level Average					
<b>SSB Phase Noise</b> (1GHz Carrier, 20°C ~30°C)	-92dBc/Hz; 100Hz -105dBc/Hz; 1kHz -118dBc/Hz; 10kHz -123dBc/Hz; 100kHz					
<b>Residual FM</b> (Central Frequency 1GHz, Resolution Bandwidth 10Hz, Video Bandwidth 10 Hz)	$\leq(0.25\text{Hz} \times N)$ p-p, nominal value within 20 ms N is frequency multiplication times of LO					
<b>Displayed Average Noise Level</b> (the Input End is Connected to Match Load, Sampling or Average Wave Detection. The Average Type is Logarithm, 0dB Input Attenuation, RF Gain Takes the DANL as the Priority, 20°C ~ 30°C)	-153dBm; 10MHz~1GHz -151dBm; 1GHz~2GHz -150dBm; 2GHz~3GHz -148dBm; 3GHz~3.6GHz -145dBm; 3.6GHz~4GHz -148dBm; 4GHz~5GHz -150dBm; 5GHz~9GHz -146dBm; 9GHz~18GHz -141dBm; 18GHz~26.5GHz					

<p><b>Frequency Response &amp; Absolute Amplitude Accuracy</b> (10dB Attenuation, 20°C ~ 30°C)</p>	<p>Frequency response:            ±1.0dB; 3Hz~20MHz            ±1.0dB; 20MHz~2GHz            ±1.0dB; 2Hz~3.6GHz            ±1.2dB; 3.6GHz~4GHz            ±1.5dB; 4GHz~9GHz            ±2.0dB; 9GHz~18GHz            ±3.0dB; 18GHz~26.5GHz</p> <p>Absolute amplitude accuracy 10 dB Attenuation, 20°C ~ 30°C,            1Hz ≤ Resolution bandwidth ≤ 1MHz, Input signal-10 ~ -50 dBm):            ±0.24dB; 500MHz            ±(0.24dB + Frequency response; All frequencies</p>
<p><b>1dB gain Compression</b> (Mixer Level, Dual-Tone Testing, Resolution Bandwidth of 5kHz, Frequency Interval of 3MHz, 20°C ~ 30°C)</p>	<p>-3dBm; 20MHz~40MHz            0dBm; 40MHz~200MHz            +1dBm; 200MHz~4GHz            - 1dBm; 4GHz~9GHz            0dBm; 9GHz~26.5GHz</p>
<p><b>Tri-Order Intermodulation Distortion (TOI)</b> (Input mixer 2 -10dBm signal tes, Frequency Interval is 50kHz, 20°C ~ 30°C)</p>	<p>+12dBm; 10MHz ~ 200MHz            +12dBm; 200MHz ~ 4GHz            +10dBm; 4GHz ~ 9GHz            +12dBm; 9GHz ~ 18GHz            +13dBm; 18GHz ~ 26.5GHz</p>
<p><b>Residual Response</b> (The Input End is Connected to Match Load, 0dB Attenuation)</p>	<p>-100dBm; 200kHz~9GHz            -100dBm (nominal); Other frequencies</p>
<p><b>Size</b></p>	<p>510mm (W) × 192mm (H) × 534mm (D) with handles, foot-pads, stand            426mm (W) × 177mm (H) × 460mm (D) without handles, foot-pads, stand</p>
<p><b>Weight</b></p>	<p>Approx. 25kg (different options, different weight)</p>
<p><b>Power</b></p>	<p>Standard: AC 220~240V 50~60Hz            4051-H98: AC 100~240V 50~60Hz</p>
<p><b>Power Consumption</b></p>	<p>Standby: less than 20W; operating: less than 400W</p>
<p><b>Temperature Range</b></p>	<p>Operating temperature: 0°C ~ +50°C; Storage temperature: -40°C ~ +70°C</p>
<p><b>Input Connector</b></p>	<p>4051A-S/4051B-S /4051C-S /4051D-S: type N (F), Impedance 50Ω            4051E-S: 3.5mm (M), Impedance 50Ω</p>

**NOTES:**

1. Nominal value refers to the estimated performance, or the performance which is useful for the product beyond the quality guarantee scope.
2. Typical value refers to other performance information when typical values stay beyond the quality guarantee scope. When performance surpasses technical specifications, 80% of samples will present 95% confidence within 20°C ~ 30°C temperature range. Typical performance excludes test uncertainty.

## ORDERING INFORMATION

**MAIN UNIT: 4051A-S Spectrum Analyzer (3Hz~4GHz)**

**4051B-S Spectrum Analyzer (3Hz~9GHz)**

**4051C-S Spectrum Analyzer (3Hz~13.2GHz)**

**4051D-S Spectrum Analyzer (3Hz~18GHz)**

**4051E-S Spectrum Analyzer (3Hz~26.5GHz)**

### STANDARD PACKAGE

No.	Description	Remarks
1	Power Cord	Standard tri-prong power cord
2	USB Mouse	-
3	User Manual	-
4	Programming Manual	-

### OPTIONS

Serial No.	Description	Functions
4051-H03	IF Output	Output third IF signal, output frequency range is 10MHz ~ 160MHz, step resolution is 1Hz.
4051-H08	Wide Log Detect Output	To output the logarithm wave-detection signal which can reflect the input signal level characteristics.
4051-H34-04 4051-H34-09 4051-H34-13 4051-H34-18 4051-H34-26	Low-Noise Preamplifier	Can select low waveband preamplifier or full waveband preamplifier. Under full waveband preamplifier, the analyzer provide above 4GHz frequency band noise optimization path. (Note: the No. of low waveband preamplifier is H34-04. The full waveband preamplifier should be selected according to the frequency upper limit of the main unit. For instance, the max. frequency of 4051E-S is 26.5GHz, then the full waveband preamplifier H34-26 should be selected).
4051-S04	Phase Noise Measurement	SSB phase noise curves and single-point phase noise measurement
4051-H97	Mounting Suit	Handles and accessories for 4051 mounting on standard racks.
4051-H98	English Options	English panels, user manual, operation interface, and operation system. Power supply: AC 100~240V, 50~60Hz.
4051-H99	Aluminum Transportation Case	High-strength lightweight aluminum transportation case, with handle and roller, convenient for transportation.